





RHIMEX

**Profiles of rubber, sponge rubber,
silicone, foam silicone**




Profiles 7

Table of content

1	Edge trims				4
2	Silicone edge trims				18
3	POM-profiles				23
4	Rubber cord				26
5	Special profiles				28
6	Silicone profiles (special order items)				38
7	Co-extruded plastic profiles				43
8	U-profiles				47
9	P-profiles				53
10	Glazing sections				56
11	Filler strips				60
12	Sponge rubber				62
13	Window seals				72
14	Cellular rubber				74
15	Fender lists				76
16	Sico trim				80
17	Rubber buffer				84
18	Vibration muffler				91
19	Fenders				100
20	Brush sections				106
21	Soundproofing				110
22	Rubber sheets from China				114
23	Rubber mats				124
24	Rubber straps				132
25	Bumpers				136
26	Poliall				138
27	Inflatable seals				140
28	Equipment				143
29	Properties				146
30	Item number index				148

NOTE

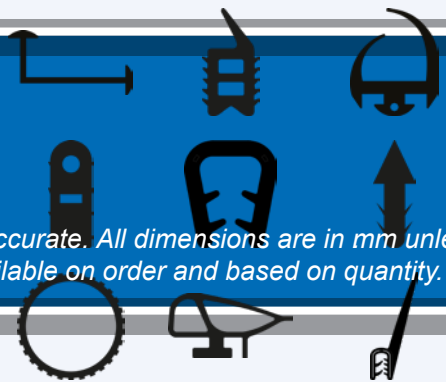The drawings in this catalog are not dimensionally accurate. All dimensions are in mm unless otherwise stated. Some profiles are not kept in stock, but are only available on order and based on quantity. Cut profiles are not returnable.




















Edge trims

















Corners and edges are often exposed to additional wear and tear and impact. Therefore, it can be a great advantage to use edge trims made of rubber. Edge trims are used in door edges, trucks, around windows, for chairs, engine parts, cabinets, etc.

We have a wide variety edge trims in stock, each specified in terms of type, quality, with and without balloon, etc. If we do not have the product in stock, we can supply special profiles on order. We are therefore proud to say that we can solve almost any type of task.

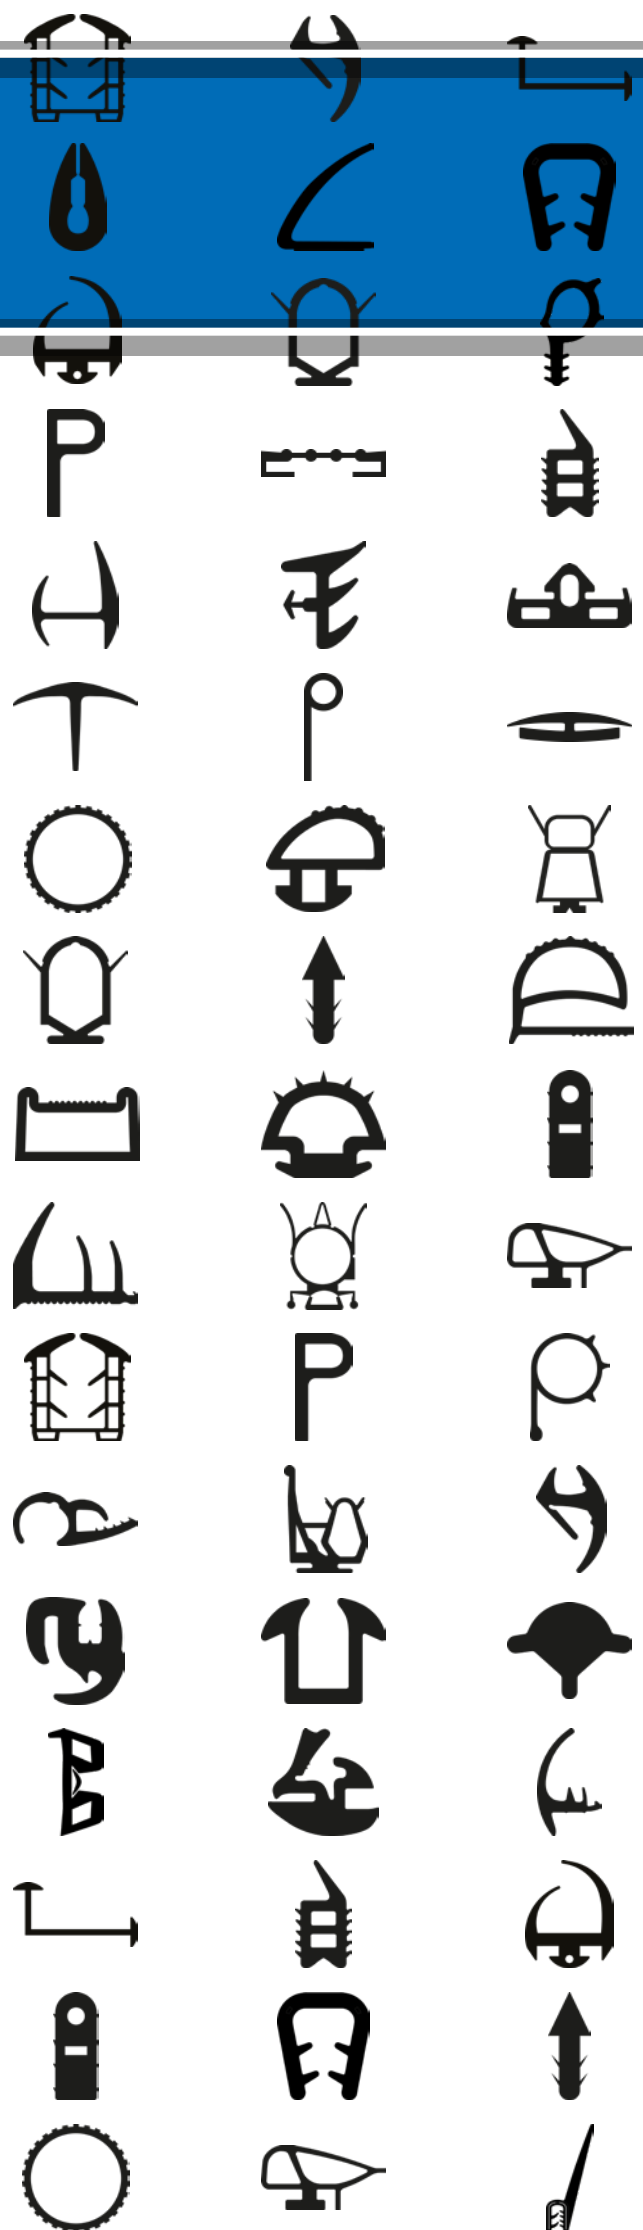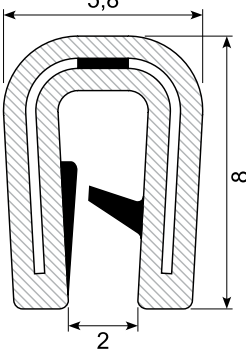
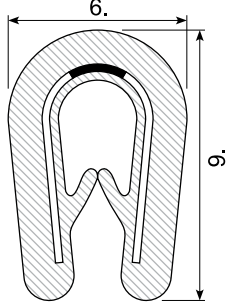
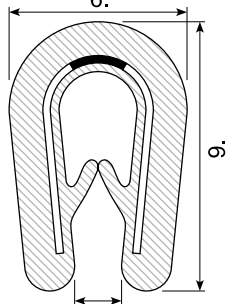
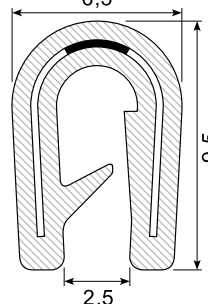
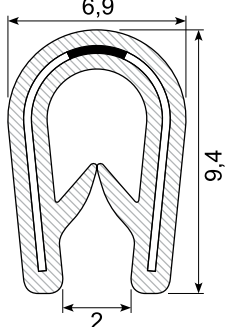
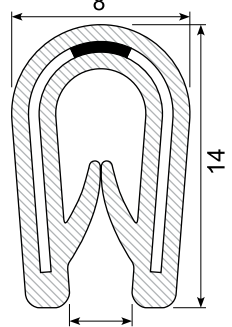
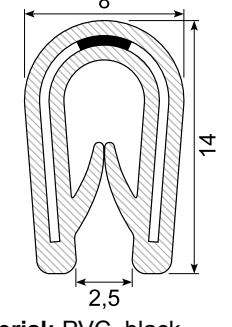
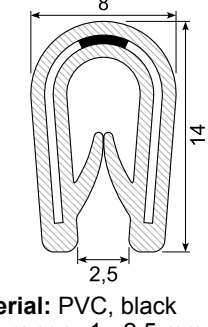
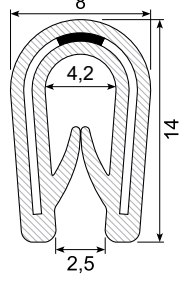
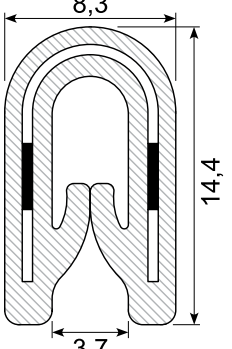
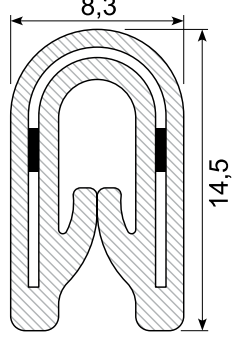
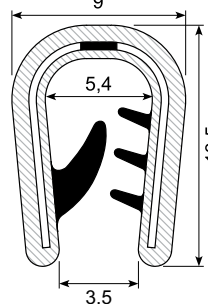
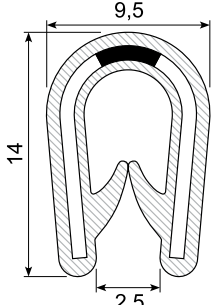
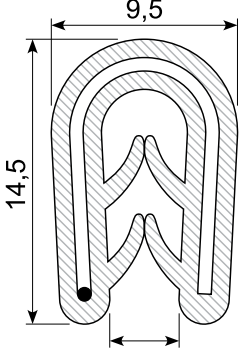
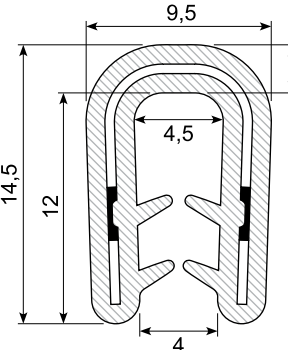
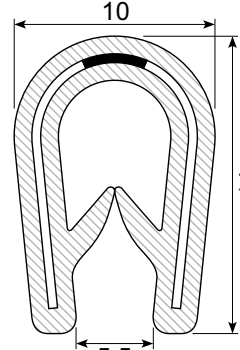
Naturally, with a large selection comes a wealth of knowledge that we are happy to share should you need it. We can help you with your choice and answer any questions you might have concerning edge trims in our range.



















33.306  Material: PVC, black + bi Grip range: 1 - 2 mm Hardness: SH 75 / 65 Insert: 15 x 0,3 mm steel	33.409F  Material: EPDM Grip range: 1 - 2 mm Hardness: SH 60 Insert: Steel Flammehæmmende <i>Flame retardant EN 45545</i>	33.409 / 33.401G  Material: PVC, black / grey Grip range: 1 - 2 mm Hardness: SH 78 Insert: 16 x 0,3 mm steel 33.401G: Grey	33.307 / 33.307A  Material: PVC, black Grip range: 1 - 2 mm Hardness: SH 75 Insert: 17,5 x 0,3 mm steel 33.307A: På pappspole <i>On cardboard coil</i>
33.410X / 33.410XG  Material: PVC, black / grey Grip range: 1 - 2 mm Hardness: SH 75 Insert: 17,5 x 0,3 mm steel 33.410XG: Grey	33.310X  Material: PVC, black Grip range: 1 - 3 mm Hardness: SH 75 Insert: 26 x 0,47 mm steel	33.310SS  Material: PVC, black Grip range: 1 - 2,5 mm Hardness: SH 70 - 75 Insert: 26 x 0,5 mm Rustfri stål <i>Stainless steel SS 304</i>	33.310SS-316  Material: PVC, black Grip range: 1 - 2,5 mm Hardness: SH 70 - 75 Insert: 26 x 0,5 mm Rustfri stål SS 316 <i>Stainless steel SS 316</i> Syrefast <i>Acid-proof</i>
33.310SS-316EPDM  Material: EPDM, black Grip range: 1 - 2,5 mm Hardness: SH 80 Insert: 26 x 0,5 mm Flammehæmmende <i>Flame retardant</i> UL94V0 + Din 5510-2 Min. order: 20.000 m	33.422  Material: TPE, flexible Grip range: 1 - 2,5 mm Hardness: SH 82 Insert: 25 x 0,48 mm steel	33.309XM  Material: PVC, mokka brown Grip range: 1 - 2,5 mm Hardness: SH 78 Insert: Steel Specialtilbud <i>Special offer</i>	33.418SS  Material: PVC, black + bi Grip range: 2 - 4 mm Hardness: SH 78 / 78 Insert: 26 x 0,5 mm Rustfri stål 304 <i>Stainless steel 304</i>
33.308 / 33.308A  Material: PVC, black Grip range: 1 - 4 mm Hardness: SH 75 Insert: 26 x 0,47 mm steel 33.308A: På pappspole <i>On cardboard coil</i>	33.432  Material: EPDM Grip range: 1 - 3 mm Hardness: SH 65 Insert: 27 mm wire	33.438  Material: EPDM Grip range: 1,5 - 3,5 mm Hardness: SH 65 Insert: 29 x 0,5 mm steel	33.420X  Material: PVC, black Grip range: 1 - 4 mm (3-5) Hardness: SH 75 Insert: 27 x 0,47 mm steel

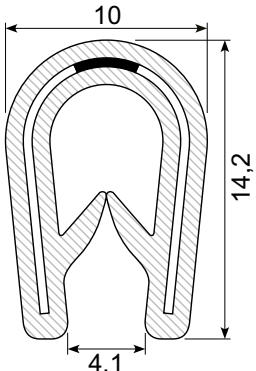
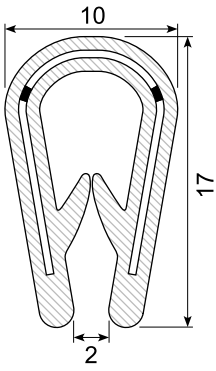
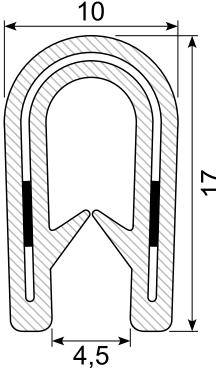
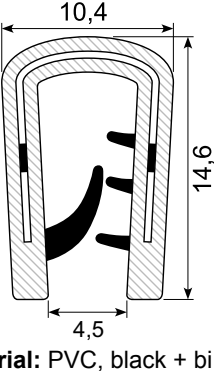
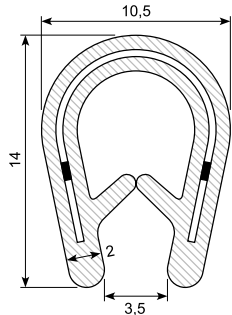
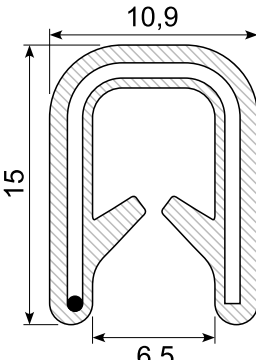
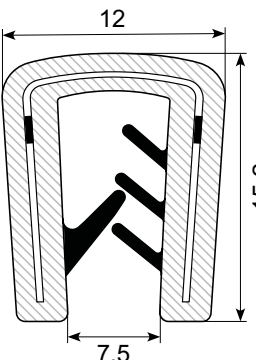
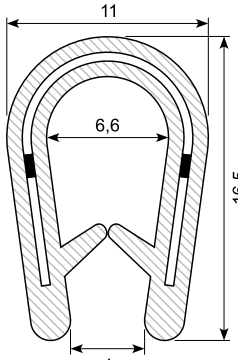
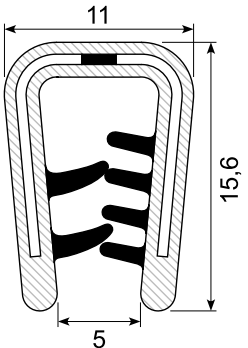
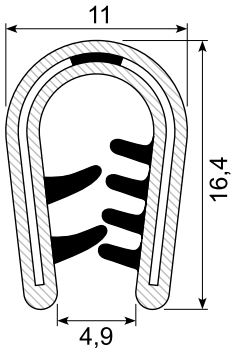
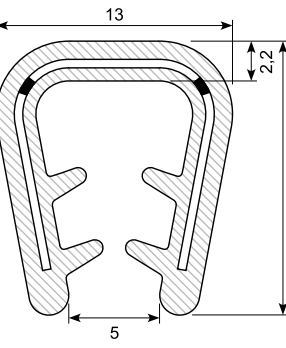
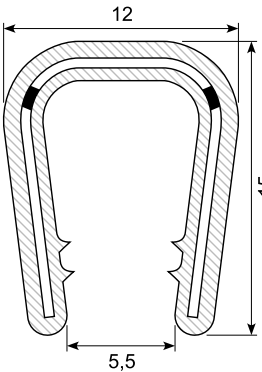
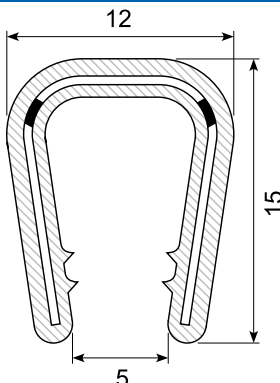
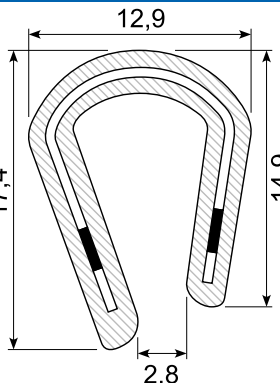
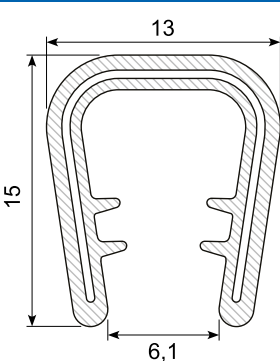
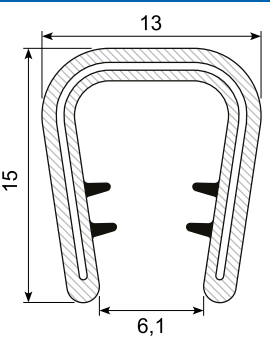
33.420H  Material: PVC, white Grip range: 1 - 4 mm	33.419  Material: PVC, black Grip range: 1 - 4 mm Hardness: SH 78 Insert: 31 x 0,5 mm steel	33.411  Material: PVC, grey Grip range: 2,5 - 4 mm Hardness: SH 78 Insert: 29 x 0,48 mm steel	33.418X  Material: PVC, black + bi Grip range: 2 - 4 mm Hardness: SH 75 / 75 Insert: 26 x 0,5 mm steel Hvide læber <i>White lips</i>
33.420FX  Material: EPDM Grip range: 1 - 3 mm Hardness: SH 60 Insert: 26 x 0,5 mm steel Flammehæmmende <i>Flame retardant EN 45545</i>	33.434  Material: EPDM Grip range: 2 - 4 mm Hardness: SH 65 Insert: 30 mm wire	33.414  Material: PVC, black + bi Grip range: 4 - 6 mm Hardness: SH 75 / 60 Insert: 30 x 0,48 mm steel	33.419A  Material: PVC, black Grip range: 2 - 4 mm Hardness: SH 75 Insert: 30 x 0,5 mm steel
33.427X  Material: PVC, black + bi Grip range: 1,5 - 4,5 mm Hardness: SH 75 / 75 Insert: 30 x 0,47 mm steel Gule læber <i>Yellow lips</i>	33.094X  Material: PVC, black + bi Grip range: 1 - 4 mm Hardness: SH 75 / 75 Insert: 30 x 0,47 mm steel Gule læber <i>Yellow lips</i>	33.435X  Material: EPDM Grip range: 5 - 8 mm Hardness: SH 70 Insert: 31 x 0,5 mm steel	33.1153A  Material: PVC, black Grip range: 6 - 8 mm Hardness: SH 78 Insert: 32 x 0,47 mm steel
33.1153GA  Material: PVC, grey Grip range: 6 - 8 mm Hardness: SH 78 Insert: 32 mm steel	33.415  Material: PVC, black Grip range: 5 - 7 mm Hardness: SH 78 Insert: 29 x 0,48 mm steel	33.426XA *  Material: PVC, black Hardness: SH 78 Grip range: 4,5 - 7 mm Insert: 32 mm Min. order: 1.000 m	33.426A / 33.426GA *  Material: PVC+bi, black/grey Hardness: SH 78 / 65 Grip range: 4,5 - 7 mm Insert: 32 mm 33.426GA: Grey Min. order: 1.000 m

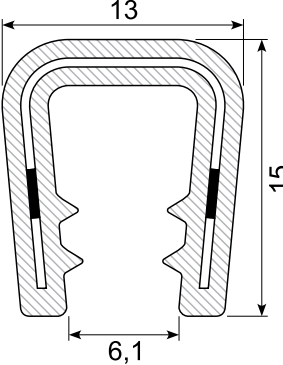
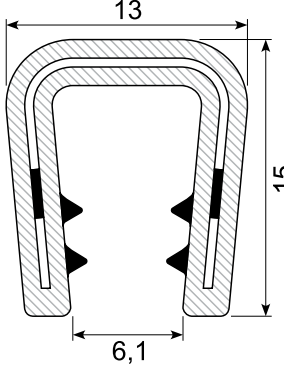
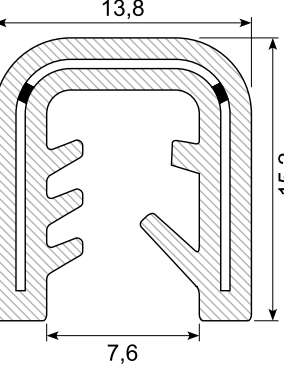
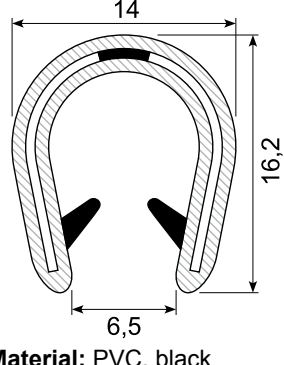
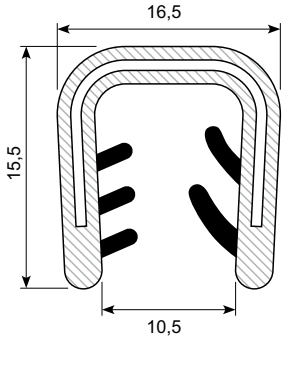
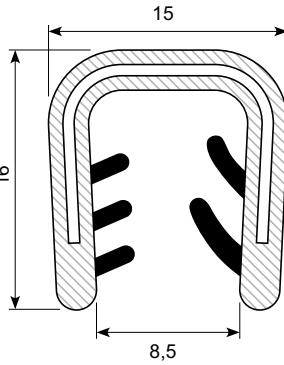
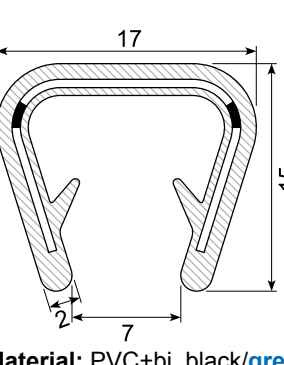
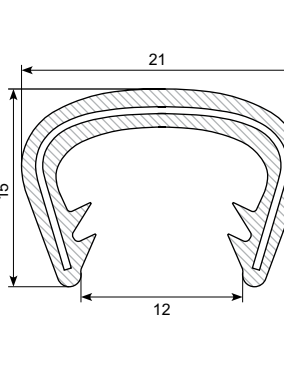
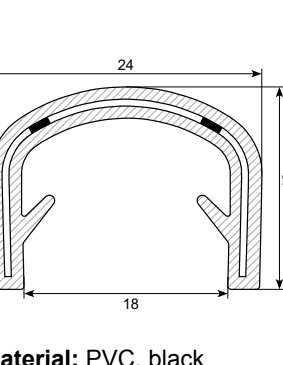
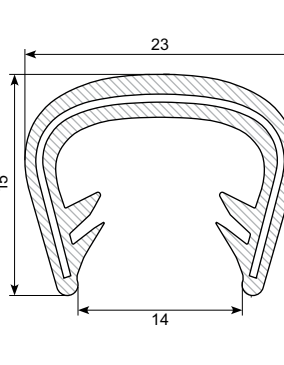
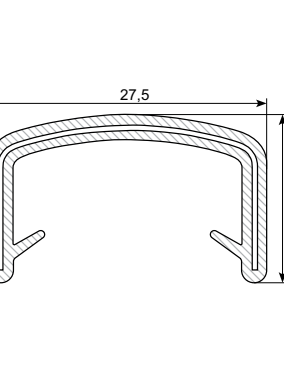
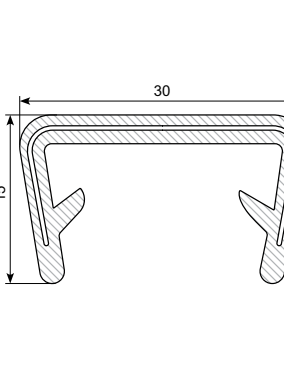
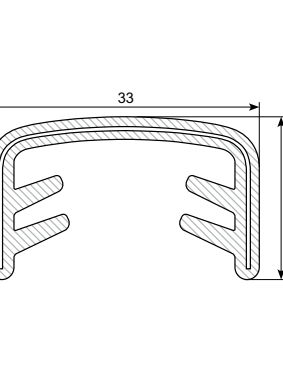
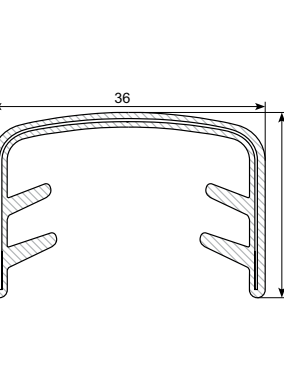
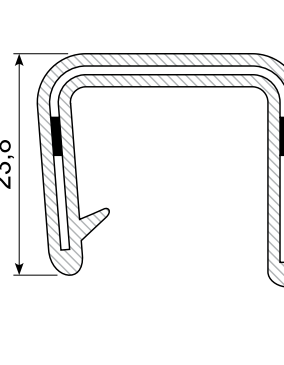
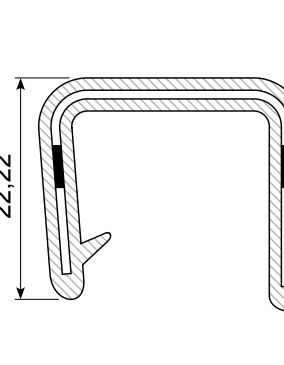
* Skaffevare Special order item

33.426X  Material: PVC, black Grip range: 4,5 - 7 mm Hardness: SH 75 Insert: 30 x 0,8 mm steel	33.426  Material: PVC, black + bi Grip range: 4,5 - 7 mm Hardness: SH 78 / 65 Insert: 29 x 0,48 mm steel	33.433  Material: EPDM Grip range: 4 - 6 mm Hardness: SH 70 Insert: 33 x 0,47 mm steel	33.1154  Material: PVC, black Grip range: 6 - 8 mm Hardness: SH 75 / 75 Insert: 30 x 0,47 mm steel Hvide læber <i>White lips</i>
33.430  Material: PVC, black + bi Grip range: 10 - 12 mm Hardness: SH 75 / 60 Insert: 35 x 0,48 steel	33.430A  Material: PVC Grip range: 8 - 10 mm Hardness: SH 75 / 60 Insert: 35 x 0,48 steel	33.428 / 33.428G  Material: PVC+bi, black/grey Grip range: 10 - 12 mm Hardness: SH 78 Insert: 36 x 0,5 mm steel 33.428G: Grey	33.1157 *  Material: PVC, black Grip range: 12 - 14 mm Hardness: SH 75 Min. order: 100 m
33.1158A *  Material: PVC, black Grip range: 13 - 15 mm Hardness: SH 70 Insert: 45 x 0,48 mm steel Min. order: 500 m	33.1159 *  Material: PVC, black Grip range: 14 - 16 mm Hardness: SH 75 Min. order: 100 m	33.1160 *  Material: PVC, black Grip range: 17 - 19 mm Hardness: SH 75 Min. order: 100 m	33.1161 *  Material: PVC, black Grip range: 20 - 23 mm Hardness: SH 75 Min. order: 100 m
33.1162 *  Material: PVC, black Grip range: 25 - 27 mm Hardness: SH 75 Min. order: 100 m	33.1163 *  Material: PVC, black Grip range: 28 - 32 mm Hardness: SH 75 Min. order: 100 m	33.1155  Material: PVC, black Grip range: 15 - 16 mm Hardness: SH 85 Insert: Steel	33.1156  Material: PVC, black Grip range: 18 - 19 mm Hardness: SH 85 Insert: Steel

















* Skaffevare Special order item

















33.354  Material: PVC, black+bi / sponge rubber Grip range: 1 - 2 mm Hardness: SH 78 / 57 Density: 0,55 Insert: 16 x 0,3 mm steel	33.354A  Material: EPDM co-ex Grip range: 1,5 - 2 mm Hardness: SH 70 Density: 0,55 Insert: 17,5 mm steel	33.354B  Material: EPDM co-ex Grip range: 1,5 - 2,5 mm Hardness: SH 70 Density: 0,55 Insert: 22 mm wire	33.468F  Material: EPDM co-ex Grip range: 1 - 2 mm Hardness: SH 60 Density: 0,8 Insert: 22 x 0,75 mm wire Flammehæmmende Flame retardant EN 45545
33.468X  Material: EPDM co-ex Grip range: 1 - 2 mm Hardness: SH 60 Density: 0,55 Insert: 22 x 0,75 mm wire <i>Discontinued when sold</i> Alternative e.g. 33.468B	33.468FX  Material: EPDM co-ex Grip range: 1 - 2 mm Hardness: SH 75 Density: 0,55 Insert: 22 x 0,74 mm wire Flammehæmmende Flame retardant UL94-V0 Min. order: 3.000 m	33.468B  Material: EPDM co-ex Grip range: 1 - 2 mm Hardness: SH 70 Density: 0,55 Insert: 22 mm wire	33.358A *  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 70 Density: 0,55 Insert: 27 mm wire Min. order: 3.000 m
33.358D  Material: EPDM co-ex Grip range: 1,5 - 2,5 mm Hardness: SH 70 Density: 0,55 Insert: 25 mm wire	33.358E  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 70 Density: 0,55 Insert: 27 mm wire	33.021  Material: EPDM co-ex Grip range: 0,8 - 2 mm Hardness: SH 70 Density: 0,55 Insert: 25 mm wire	33.358X  Material: EPDM co-ex Grip range: 1 - 2,5 mm Hardness: SH 70 Density: 0,55 Insert: 26 x 0,5 mm unbroken
33.358B  Material: EPDM co-ex Grip range: 1 - 3 mm Hardness: SH 70 Density: 0,55 Insert: 27 mm	33.371E EMV - EMC - EMI *  Material: EPDM co-ex Grip range: 1 - 3 mm Hardness: SH 70 Density: 0,55 Insert: Wire Elektrisk ledende Electrically conductive	33.469X  Material: PVC, black +bi / sponge rubber Grip range: 1,5 - 3,5 mm Hardness: SH 75 / 63 Density: 0,6 - 0,85 Insert: 26 x 0,47 mm steel	33.371FX  Material: EPDM co-ex Grip range: 1 - 3 mm Hardness: SH 60 Density: 0,8 Insert: 26 x 0,75 mm wire Flammehæmmende Flame retardant EN 45545














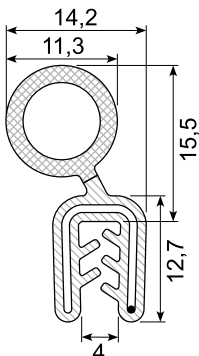
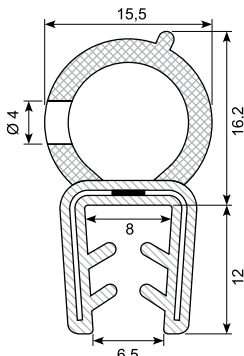
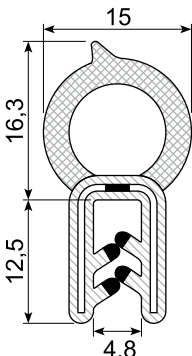
33.371X  Material: EPDM co-ex Grip range: 1 - 3,5 mm (1-3) Hardness: SH 70 Density: 0,55 Insert: 27 mm wire	33.370NBR  Material: NBR co-ex Grip range: 1 - 3 mm Hardness: SH 70 Density: 0,55 Insert: Wire Olieb Bestandig Oil resistant	33.369  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 65 Density: 0,6 Insert: Wire	33.481  Material: PVC, black + bi / sponge rubber Grip range: 1 - 4 mm Hardness: SH 57 / 78 Density: 0,55 Insert: Steel
33.481A  Material: PVC, black Grip range: 1 - 3 mm Hardness: SH 75 Density: 0,55 Insert: 26 mm steel	33.481B  Material: EPDM co-ex Grip range: 1,5 - 3,5 mm Hardness: SH 70 Density: 0,55 Insert: 27 mm steel	33.353NBR *  Material: NBR co-ex Grip range: 3 - 4 mm Hardness: SH 70 Density: 0,55 Insert: 31 x 0,5 mm Olieb Bestandig Oil resistant Min. order: 3.000 m	33.353  Material: EPDM co-ex Grip range: 3 - 5 mm Hardness: SH 65 Density: 0,6 Insert: 32 mm steel
33.351  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 70 Density: 0,65 Insert: 33 mm steel	33.351A  Material: EPDM co-ex Grip range: 1,5 - 3,5 mm Hardness: SH 70 Density: 0,55 Insert: 27 mm wire	33.352  Material: EPDM co-ex Grip range: 5 - 6 mm Hardness: SH 78 Density: 0,6 Insert: 31 x 0,5 mm Discontinued when sold	33.362FX  Material: EPDM co-ex Grip range: 1 - 3,5 mm Hardness: SH 60 Density: 0,8 Insert: 26 x 0,75 mm wire Flammehæmmende Flame retardant EN 45545
33.357X  Material: PVC, black / sponge rubber Grip range: 5 - 7 mm Hardness: SH 78 Density: 0,6 Insert: 31 x 0,5 mm	33.359X  Material: EPDM co-ex Grip range: 1,5 - 4 mm Hardness: SH 70 Density: 0,6 - 0,85 Insert: 25 wire	33.353X  Material: EPDM co-ex Grip range: 4 - 6 mm Hardness: SH 65 Density: 0,6 Insert: 33 mm steel	33.376  Material: EPDM co-ex Grip range: 1 - 3,5 mm Hardness: SH 70 Density: 0,75 Insert: 27 mm steel

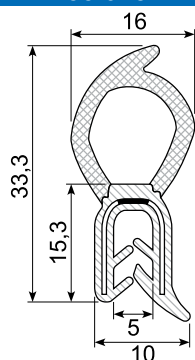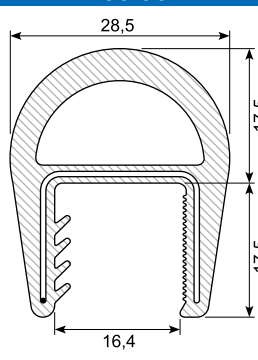33.360  Material: EPDM co-ex Grip range: 1 - 2,5 mm Hardness: SH 60 Density: 0,6 Insert: 27 x 0,75 mm wire	33.360NBR *  Material: NBR co-ex Grip range: 1 - 3 mm Hardness: SH 70 Density: 0,55 Insert: 27 x 0,75 wire Oliebestandig Oil resistant Min. order: 4.000 m	33.377  Material: EPDM co-ex Grip range: 1 - 3,5 mm Hardness: SH 70 Density: 0,75 Insert: 27 mm wire	33.360F *  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 65 Density: 0,6 Insert: 27 x 0,76 mm wire Flammehæmmende Flame retardant NNF 16101 (Certificate valid only 2016) Min. order: 3.000 m
33.360X  Material: EPDM co-ex Grip range: 1 - 2,5 mm (1-3) Hardness: SH 70 Density: 0,6 Insert: 27 x 0,74 mm wire	33.362X  Material: Epdm co-ex Grip range: 2 - 3,5 mm (2-4) Hardness: SH 70 Density: 0,60 Insert: 26 x 0,47 mm steel	33.365X  Material: PVC, black + bi / sponge rubber Grip range: 1 - 4 mm Hardness: SH 75 / 63 Density: 0,6 - 0,85 Insert: 26 x 0,47 mm steel	33.362F *  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 65 Density: 0,6 Insert: 29 x 0,5 mm steel Flammehæmmende Flame retardant NNF 16101 (Certificate valid only 2016) Min. order: 1.000 m
33.374  Material: EPDM co-ex Grip range: 1,5 - 4 mm Hardness: SH 70 Density: 0,55 Insert: 27 x 0,47 mm steel	33.362D *  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 65 Density: 0,6 Insert: 27 x 0,75 mm wire Min. order: 510 m	33.360R  Material: PVC, black / sponge rubber Grip range: 1 - 2,5 mm Hardness: SH 77 Density: 0,65 - 0,75 Insert: 26 x 0,5 mm Rustfri stål Stainless steel 304	33.362E *  Material: EPDM co-ex Grip range: 3 - 5 mm Hardness: SH 65 Density: 0,6 Insert: 26 x 0,5 mm steel Min. order: 1.500 m
33.362  Material: EPDM co-ex Grip range: 1 - 3,5 mm Hardness: SH 70 Density: 0,6 Insert: 26 x 0,76 mm wire Discontinued when sold	33.362C *  Material: EPDM co-ex Grip range: 1,5 - 3 mm Hardness: SH 65 Density: 0,6 Insert: 26 x 0,5 mm steel Min. order: 1.500 m	33.025  Material: EPDM co-ex Grip range: 1,5 - 3,5 mm Hardness: SH 70 Density: 0,55 Insert: 27 x 0,47 mm steel	33.367 *  Material: EPDM, solid balloon Grip range: 16 mm Hardness: SH 60 Insert: 52 x 0,76 mm wire Min. order: 3.030 m

















* Skaffevare Special order item
















33.380  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 70 Density: 0,55 Insert: 29 mm wire	33.379  Material: EPDM co-ex Grip range: 2,5 - 5 mm Hardness: SH 70 Density: 0,55 Insert: 33 mm wire	33.378  Material: EPDM co-ex Grip range: 1,5 - 5 mm Hardness: SH 70 Density: 0,55 Insert: 33 mm wire	33.375  Material: EPDM co-ex Grip range: 4 - 5 mm Hardness: SH 70 Density: 0,6 - 0,85 Insert: 27 mm wire
33.367X  Material: PVC/sponge rubber, black Grip range: 15 - 16 mm Hardness: SH 85 Insert: Steel	33.463  Material: PVC, black + bi / sponge rubber Grip range: 4 - 6 mm Hardness: SH 78 / 57 Density: 0,55 Insert: 31 x 0,5 mm steel	33.355B  Material: EPDM, solid balloon Grip range: 3 - 5 mm Hardness: SH 60 Insert: 31 x 0,5 mm steel, Unbroken	33.408X  Material: PVC, black + bi / sponge rubber Grip range: 1 - 2 mm Hardness: SH 78 / 57 Density: 0,55 Insert: 16 x 0,3 mm steel
33.408A  Material: EPDM co-ex Grip range: 1 - 1,5 mm Hardness: SH 70 Density: 0,55 Insert: 18 mm wire	33.408B  Material: PVC, black + bi Grip range: 1 - 2 mm Hardness: SH 75 / 65 Density: 0,55 Insert: 17,5 mm steel Transparente læber Transparent lips	33.407A  Material: EPDM co-ex Grip range: 1 - 2,5 mm Hardness: SH 70 Density: 0,55 Insert: 22 x 0,75 mm wire	33.403F  Material: EPDM co-ex Grip range: 1 - 2 mm Hardness: SH 60 Density: 0,8 Insert: 22 x 0,75 mm wire Flammehæmmende Flame retardant EN 45545
33.9779  Material: EPDM co-ex Grip range: 1,5 - 3 mm (1-3) Hardness: SH 70 Density: 0,65 Insert: 25 x 0,5 mm steel	33.395X  Material: EPDM co-ex Grip range: 1 - 3 mm Hardness: SH 70 Density: 0,55 Insert: Wire	33.395XA  Material: EPDM co-ex Grip range: 1 - 3 mm Hardness: SH 70 Density: 0,55 Insert: Wire	33.398  Material: NBR co-ex Grip range: 2 mm Hardness: SH 60 Density: 0,55 Insert: 27 x 0,76 mm wire Oliebestandig Oil resistant

33.398X *  Material: NBR co-ex Grip range: 1 - 3 mm Hardness: SH 70 Density: 0,55 Oliebestandig Oil resistant Min. order: 2.500 m	33.395F  Material: EPDM co-ex Grip range: 1 - 3 mm Hardness: SH 60 Density: 0,8 Insert: 26 x 0,75 mm wire Flammehæmmende Flame retardant EN 45545	33.381  Material: EPDM co-ex Grip range: 1 - 2,5 mm Hardness: SH 70 Density: 0,55 Insert: Wire	33.444A *  Material: EPDM co-ex Grip range: 1,5 - 4 mm Hardness: SH 70 Density: 0,55 Insert: Wire Min. order: 1.000 m
33.372X  Material: PVC, black / sponge rubber Grip range: 1 - 3,5 mm Hardness: SH 75 / 75 Density: 0,6 - 0,85 Insert: 22 x 0,47 mm steel	33.506 *  Material: EPDM co-ex Grip range: 1 - 2,5 mm Hardness: SH 70 Density: 0,6 Insert: 30 x 0,47 mm steel Min. order: 4.000 m	33.480 *  Material: EPDM co-ex Grip range: 1 - 3,5 mm Hardness: SH 70 Density: 0,55 Insert: Steel 33.480-1435: Fixed length: 1.435 mm	33.396  Material: EPDM co-ex Grip range: 1 - 3 mm Hardness: SH 70 Density: 0,6 - 0,85 Insert: 27 mm wire
33.444X  Material: PVC, black + bi / sponge rubber Grip range: 1 - 3,5 mm Hardness: SH75 / 75 Density: 0,6-0,86 Insert: 26 x 0,47 mm steel Røde læber Red lips	33.319  Material: EPDM co-ex Grip range: 1 - 3 mm Hardness: SH 70 Density: 0,6 - 0,85 Insert: Wire	33.319F *  Material: EPDM co-ex Grip range: 1 - 2 mm Hardness: SH 70 Density: 0,6 Insert: 26 x 0,75 mm wire Flammehæmmende Flame retardant ref. NNF 16101 (Certificate valid only 2016) Min. order: 3.000 m	33.323  Material: EPDM co-ex Grip range: 1,5 - 3,5 mm Hardness: SH 70 Density: 0,6 - 0,85 Insert: 27 mm
33.324CR  Material: CR co-ex Grip range: 1 - 3,5 mm Hardness: SH 70 Density: 0,6 - 0,85 Insert: 29 mm wire Betinget oliebestandig Conditional oil resistant	33.338F  Material: EPDM co-ex Grip range: 1,5 - 3 mm Hardness: SH 65 Density: 0,60 Insert: 30 x 0,75 mm wire Flammehæmmende Flame retardant EN45545	33.450NBR  Material: NBR co-ex Grip range: 4 - 6 mm (3-6) Hardness: SH 70 Density: 0,55 Insert: 34 x 0,5 mm steel Oliebestandig Oil resistant	33.457  Material: EPDM co-ex Grip range: 5 - 6 mm Hardness: SH 60 Density: 0,6 Insert: 32 x 0,6 mm steel, Unbroken

















33.457ST  Material: EPDM co-ex Grip range: 5 - 6 mm Hardness: SH 60 Density: 0,55 Insert: 31 x 0,76 mm wire	33.449  Material: PVC, black +bi / sponge rubber Grip range: 1 - 4 mm Hardness: SH 78 / 57 Density: 0,55 Insert: 26 x 0,5 mm steel	33.321  Material: EPDM co-ex Grip range: 1 - 3,5 mm Hardness: SH 70 Density: 0,6 - 0,85 Insert: 27 mm wire	33.452R  Material: PVC, black +bi / sponge rubber Grip range: 2 - 4 mm Hardness: SH 78 / 65 Density: 0,65 - 0,75 Insert: 29 x 0,48 mm Rustfri stål <i>Stainless steel</i>
33.457S-5  Material: EPDM co-ex Grip range: 1,5 - 4 (1,5-5 mm) Hardness: SH 70 Density: 0,6 Insert: 32 x 0,47 steel	33.457S-6  Material: EPDM co-ex Grip range: 3 - 6 mm Hardness: SH 70 Density: 0,6 Insert: 32 x 0,47 steel	33.024  Material: EPDM co-ex Grip range: 2 - 4 mm (2-5) Hardness: SH 70 Density: 0,55 Insert: 33 mm wire	33.454X  Material: EPDM co-ex Grip range: 2 mm Hardness: SH 70 Density: 0,55 Insert: 27 x 0,76 mm wire
33.451E  Material: EPDM co-ex Grip range: 2 - 5 mm Hardness: SH 70 Density: 0,6 Insert: 30 mm steel	33.335  Material: EPDM co-ex Grip range: 1,5 - 3,5 mm Hardness: SH 70 Density: 0,55-0,85 Insert: 27 mm wire	33.457S-4 *  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 70 Density: 0,6 Insert: Steel Min. order: 3.000 m	33.020  Material: EPDM co-ex Grip range: 1,5 - 3 mm Hardness: SH 70 Density: 0,55 Insert: 27 x 0,47 mm steel
33.020NBR *  Material: NBR co-ex Grip range: 1,5 - 3 mm Olieb Bestandig <i>Oil resistant</i> Min. order: 2.000 m	33.332X *  Material: EPDM co-ex Grip range: 5 - 6 mm Hardness: SH 70 Density: 0,6 Insert: 33 x 0,5 steel Min. order: 5.000 m	33.470  Material: EPDM co-ex Grip range: 5 - 8 mm Hardness: SH 70 Density: 0,6 Insert: 36 x 0,5 mm steel	33.339X  Material: PVC, black+bi / sponge rubber Grip range: 2,5 - 4 mm Hardness: SH 78 / 65 Insert: Steel

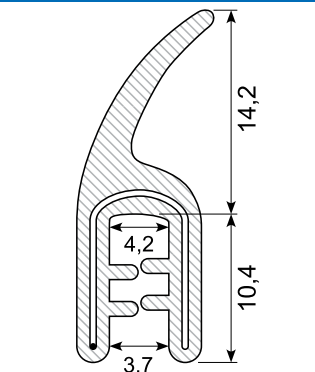* Skaffevare Special order item











33.12116 *  Material: EPDM co-ex Grip range: 1 - 4 mm Hardness: SH 70 Density: 0,6 - 0,85 Insert: 29 mm wire Min. order: 3.000 m	33.022  Material: EPDM co-ex Grip range: 1,5 - 3 mm (1,5 - 4) Hardness: SH 70 Density: 0,6 Insert: 33 mm wire	33.340  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 70 Insert: 29 x 0,74 mm steel	33.332B *  Material: EPDM co-ex Grip range: 3 - 6 mm Hardness: SH 70 Density: 0,55 Insert: 32 x 0,47 mm Steel Min. order: 1.000 m
33.453X  Material: PVC, black + sponge rubber Grip range: 1 - 3,5 mm Hardness: SH75 / 75 Density: 0,6 - 0,85 Insert: 26 x 0,47 mm steel	33.019  Material: EPDM co-ex Grip range: 1 - 4 mm Hardness: SH 70 Density: 0,6 - 0,85 Insert: Steel	33.455  Material: EPDM co-ex Grip range: 4 - 6 mm Hardness: SH 70 Density: 0,6 Insert: Steel, unbroken	33.452X  Material: PVC, black + bi / sponge rubber Grip range: 2 - 4 mm Hardness: SH 78 / 65 Density: 0,65 - 0,75 Insert: 29 x 0,48 mm
33.326  Material: EPDM co-ex Grip range: 1,5 - 4 mm Hardness: SH 70 Density: 0,55 - 0,85 Insert: 33 mm wire	33.464  Material: EPDM co-ex Grip range: 1,5 - 3,5 mm Hardness: SH 70 Density: 0,6 Insert: 31 x 0,75 mm wire	33.466  Material: EPDM co-ex Hardness: SH 70 + - 5 Grip range: 1,5 - 3 mm Density: 1,3 + - 0,03	33.331  Material: PVC, black + sponge rubber Grip range: 6 - 8 mm Hardness: SH75 / 75 Density: 0,6 - 0,85 Insert: 30 x 0,47 mm steel Hvide læber White lips
33.456F *  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 65 Density: 0,6 Insert: 31 x 0,75 mm wire Flammehæmmende Flame retardant NNF 16101 (Certificate valid only 2016) Min. order: 3.000 m	33.478 *  Material: EPDM co-ex Grip range: 16 mm Hardness: SH 60 Density: 0,6 Insert: 52 x 0,76 mm wire Min. order: 3.000 m	33.458X  Material: EPDM, solid lip Grip range: 1 - 2,5 mm Hardness: SH 60 Insert: 26 x 0,76 mm wire Discontinued when sold Alternative e.g. 33.458A	33.458A  Material: EPDM co-ex Grip range: 1 - 3 mm Hardness: SH 70 Insert: Wire

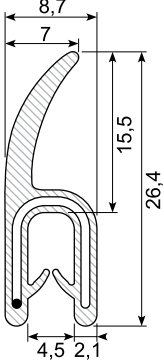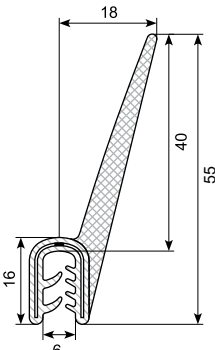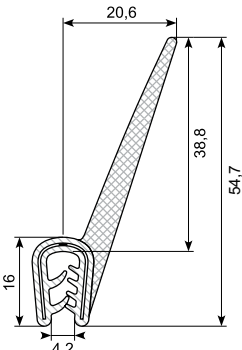33.465C  Material: EPDM solid lip Grip range: 2 - 4 mm Hardness: SH 70 Insert: 27 x 0,76 wire	33.465X  Material: EPDM, solid lip Grip range: 1 - 3 mm Hardness: SH 60 Insert: 26 x 0,76 mm wire <i>Discontinued when sold Alternative e.g. 33.465A</i>	33.465A  Material: EPDM, solid lip Grip range: 1 - 2,5 mm Hardness: SH 70 Insert: 27 x 0,74 wire	33.479  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 70 Density: 0,6 Insert: Steel
33.465B  Material: EPDM, solid lip Grip range: 1 - 3 mm Hardness: SH 70 Insert: 27 x 0,5 mm steel <i>Unbroken</i> Min. order: 3.000 m	33.459P  Material: PVC, solid lip Grip range: 1 - 2,5 mm Hardness: SH 57 Insert: 24 x 0,5 mm steel, <i>Unbroken</i>	33.459A  Material: EPDM solid lip Grip range: 1 - 2,5 mm Hardness: SH 70 Insert: 27 x 0,74 wire	33.459XA  Material: EPDM solid lip Grip range: 1 - 2,5 (1 - 1,7) Hardness: SH 70 Insert: 27 x 0,74 wire <i>Flammehæmmende</i> Min. order: 3.000 m
33.459XB  Material: CR solid lip Grip range: 1 - 2,5 mm Hardness: SH 70 Insert: 26 x 0,74 wire <i>Betinget oliebestandig</i> <i>Conditional oil resistant</i> Min. order: 3.000 m	33.459B  Material: EPDM solid lip Grip range: 1,5 - 3 mm Hardness: SH 70 Insert: Wire	33.475  Material: PVC + bi / sponge rubber Grip range: 2 - 4 mm Hardness: SH 78 / 57 Density: 0,55 Insert: Steel	33.382  Material: EPDM co-ex, solid lip Grip range: 1 - 3,5 mm Hardness: SH 70 Insert: Steel
33.482  Material: EPDM co-ex, solid lip Grip range: 2 - 4,5 mm Hardness: SH 70 Insert: 30 x 0,47 mm steel	33.483  Material: EPDM co-ex, solid lip Grip range: 1 - 2,5 mm Hardness: SH 70 Insert: 30 x 0,47 mm steel	33.460-2F  Material: EPDM co-ex Grip range: 1 - 2,5 mm Hardness: SH 65 Density: 0,6 Insert: 31 x 0,5 mm steel <i>Flammehæmmende</i> <i>Flame retardant ref. NNF 16101 (Certificate valid only 2016)</i> Min. order: 3.000 m	

★ Skaffevare Special order item

33.460-2X  Material: PVC+bi / sponge rubber Grip range: 1 - 2,5 mm Hardness: SH 78 / 57 Density: 0,6 Insert: 31 x 0,5 mm steel <i>Discontinued when sold.</i> Alternative e.g. 33.460-2C	33.460-2C  Material: EPDM co-ex Grip range: 1 - 2,5 mm Hardness: SH 70 Density: 0,6 Insert: 31 x 0,5 mm steel, No gluing, Unbroken	33.460-4X  Edge trim: PVC+bi / sponge rubber Grip range: 2 - 4 mm Hardness: SH 78/57 Density: 0,6 Insert: 31 x 0,5 mm steel <i>Discontinued when sold.</i> Alternative e.g. 33.460-4C	33.460-4C  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 70 Density: 0,6 Insert: 31 x 0,5 mm steel, No gluing, unbroken
33.460-6A  Material: PVC+bi / sponge rubber Grip range: 4 - 6 mm Hardness: SH 78/57 Density: 0,6 Insert: 31 x 0,5 mm steel Min. order: 2-4.000 m	33.460-6C  Material: EPDM co-ex Grip range: 4 - 6 mm Hardness: SH 70 Density: 0,6 Insert: 31 x 0,5 mm steel No gluing, unbroken Min. order: 2-3.000 m	33.460-6K  Material: PVC / sponge rubber Grip range: 4 - 6 mm Hardness: SH 70 Density: 0,6 Insert: 31 x 0,5 mm steel, Unbroken Min. order: 2-4.000 m	33.460-6XL  Material: PVC+bi / sponge rubber Grip range: 3 - 6 mm Hardness: SH 75 / 57 Density: 0,6 Insert: Steel
33.472  Material: EPDM, solid lip Grip range: 2 - 4 mm Hardness: SH 70 Insert: 29 x 0,5 mm Unbroken	33.471  Material: EPDM, solid lip Grip range: 3 - 4 mm Hardness: SH 60 solid lip Insert: 29 x 0,76 mm wire	33.443X  Material: EPDM co-ex Grip range: 1 - 2 mm Hardness: SH 60 Density: 0,6 Insert: Wire	33.383  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 70 Density: 0,6 Insert: 30 x 0,5 steel
33.474  Material: EPDM co-ex Grip range: 2 - 5 mm Hardness: SH 70 Density: 0,6 - 0,85 Insert: 27 mm steel	33.439A  Material: PVC+bi / sponge rubber Grip range: 1 - 4 mm Hardness: SH 78 / 57 Density: 0,6 Insert: 26 x 0,5 mm steel Gule læber Yellow lips	33.026  Material: EPDM co-ex Grip range: 1,5 - 2 mm Hardness: SH 70 Density: 0,55 Insert: 26 x 0,76 mm wire	33.026XA  Material: EPDM co-ex Grip range: 2 - 3 mm Hardness: SH 70 Density: 0,55 Insert: 26 x 0,76 mm wire


* Skaffevare Special order item

















33.026X  Material: EPDM co-ex Grip range: 3 - 4 mm Hardness: SH 70 Density: 0,55 Insert: 26 x 0,76 mm wire	33.436  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 70 Density: 0,6 Insert: 33 mm wire	33.442  Material: EPDM co-ex Grip range: 1 - 3 mm Hardness: SH 70 Density: 0,65 Insert: 29 mm steel	33.473  Material: EPDM co-ex Grip range: 2 - 5 mm Hardness: SH 70 Insert: 27 x 0,47 mm steel
33.462  Material: PVC / sponge rubber Grip range: 1 - 2,5 mm Hardness: SH 78 Density: 0,65 - 0,75 Insert: 25 x 0,48 mm steel	33.462R  Material: PVC / sponge rubber Grip range: 1 - 2,5 mm Hardness: SH 78 Density: 0,65 - 0,75 Insert: 25 x 0,48 mm Rustfri stål <i>Stainless steel</i>	33.409ALU  Material: PVC, black Grip range: 0,8 - 2 mm Hardness: SH 75 Insert: 17,5 mm aluminium Min. order: 10.000 m	33.310ALU  Material: PVC, black Grip range: 1 - 2,5 mm Hardness: SH 75 Insert: 26 mm aluminium Min. order: 10.000 m
33.432ALU  Material: EPDM Grip range: 2 - 4 mm Hardness: SH 65 Insert: 26 mm aluminium Min. order: 10.000 m	33.000  Hjørnestykke i nylon. Sikrer korrekt hjørneradius <i>Nylon corner piece. Ensures correct corner radius</i> PA6 + 30% GF Min. order: 100		

Silicone edge trims

The silicone edge trims are used like other types of edge trims. However, silicone is much more resistant to higher temperatures.

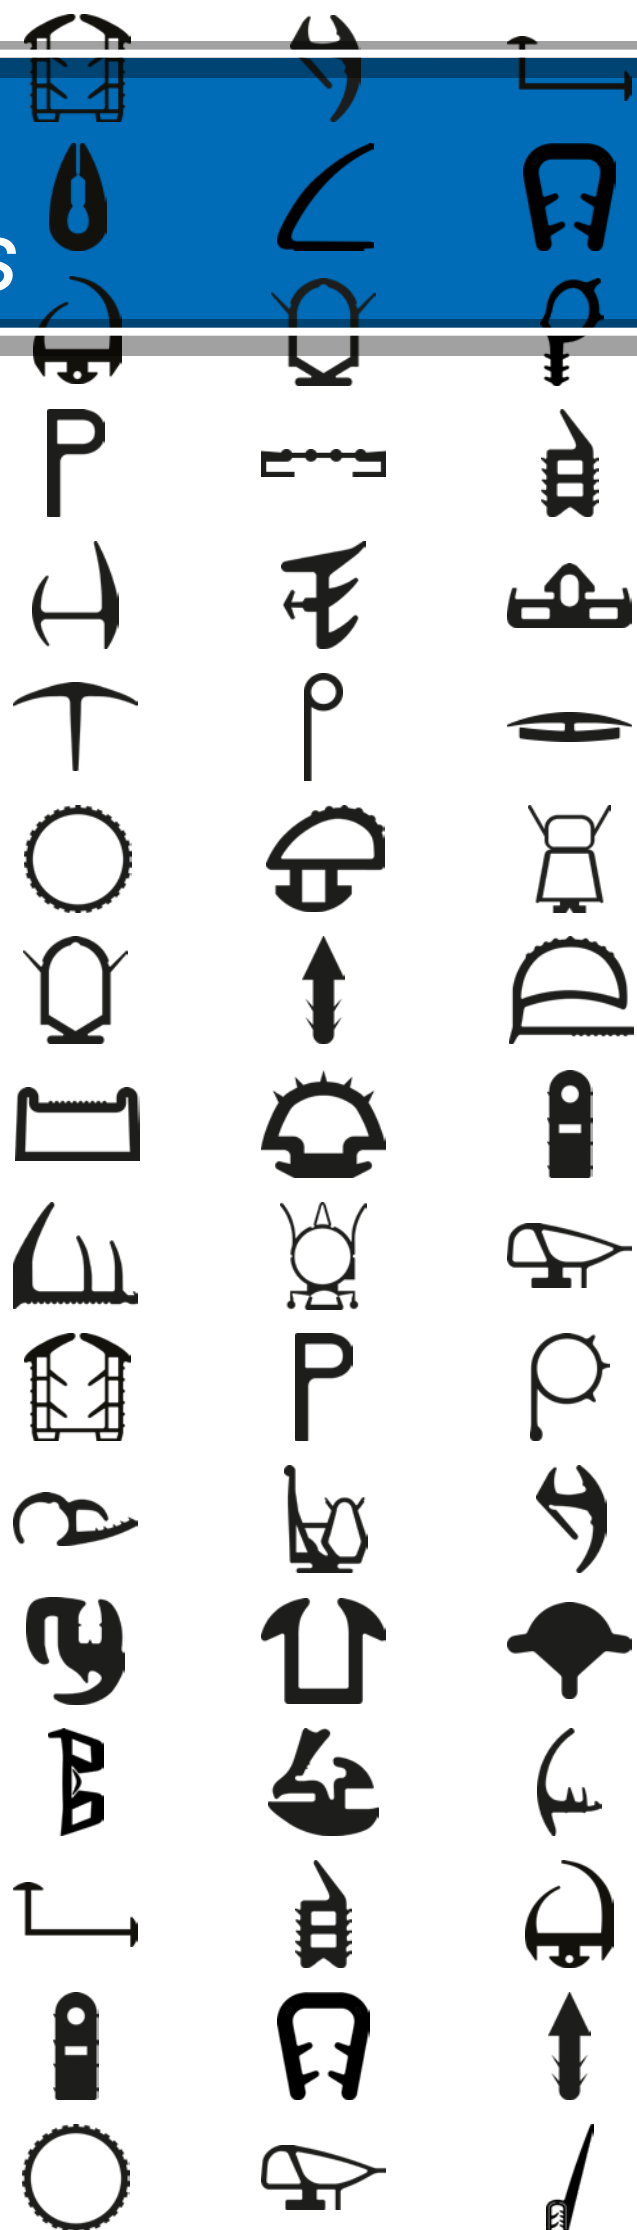















We also offer FDA-approved silicone edge trims and / or with heat tolerance up to 270 °C.



















33.311  Material: Silicone, black, FDA conform Grip range: 1 - 2 mm Hardness: SH 60 Insert: Wire 18 x 0,76 mm Varmebestandig Heat resistant 200° C	33.510 *  Material: Silicone, black, FDA conform Grip range: 1 - 2 mm Hardness: SH 65 Insert: Wire 26 x 0,76 mm Varmebestandig Heat resistant 200° C Min. order: 500 m	33.312 *  Material: Silicone, black, FDA conform Grip range: 3 - 4 mm Hardness: SH 60 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m	33.429 *  Material: Silicone, black, FDA conform Grip range: 2,5 - 5 mm (5 - 7) Hardness: SH 60 Insert: Wire 39 x 0,76 mm Varmebestandig Heat resistant 200° C
33.534 *  Material: Silicone, black, FDA conform Grip range: 5 - 8 mm Hardness: SH 70 + - 5 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m	33.537 *  Material: Silicone, black, FDA conform Grip range: 2 - 4 mm Hardness: SH 60 + - 5 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m	33.531 *  Material: Silicone, black, FDA conform Grip range: 2,5 - 5 mm Hardness: SH 70 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m	33.532 *  Material: Silicone, black, FDA conform Grip range: 4 - 6 mm Hardness: SH 65 Insert: Wire Varmebestandig Heat resistant 200° C
33.538 *  Material: Silicone, black, FDA conform Grip range: 3 - 4 mm Hardness: SH 60 + - 5 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m	33.536 *  Material: Silicone, black, FDA conform Grip range: 1,5 - 2,5 mm Hardness: SH 60 + - 5 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m	33.541 *  Material: Silicone, black, FDA conform Grip range: 2 - 3,5 mm Hardness: SH 68 + - 5 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m	33.540 *  Material: Silicone, black, FDA conform Grip range: 1 - 3 mm Hardness: SH 60 + - 5 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m
33.527 *  Material: Silicone, black, FDA conform Grip range: 1 - 2,5 mm Hardness: SH 65 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m	33.539 *  Material: Silicone, black, FDA conform Grip range: 3,5 - 4,5 mm Hardness: SH 60 + - 5 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m	33.529 *  Material: Silicone, black, FDA conform Grip range: 1 - 2 mm Hardness: SH 80 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m	33.530 *  Material: Silicone, black, FDA conform Grip range: 4,5 - 6 mm Hardness: SH 70 Insert: Wire Varmebestandig Heat resistant 200° C

* Skaffevare Special order item

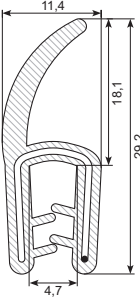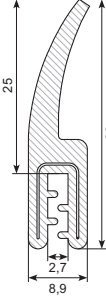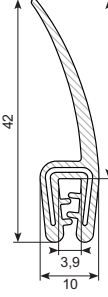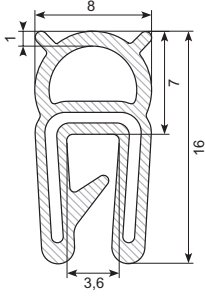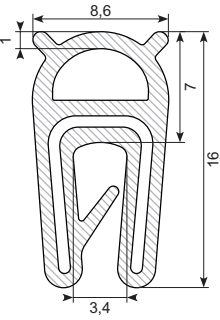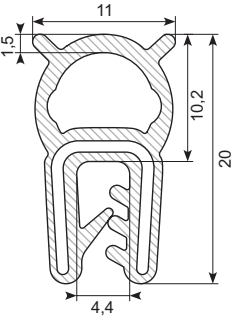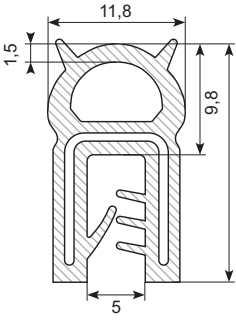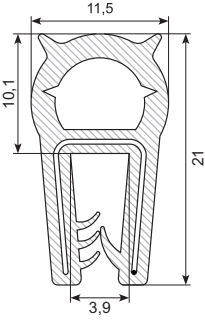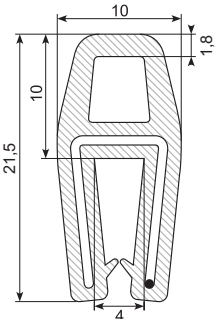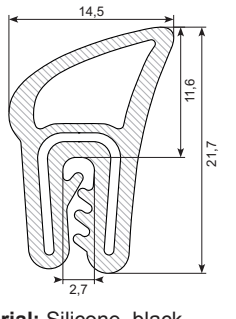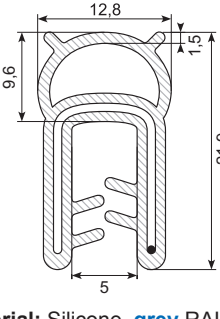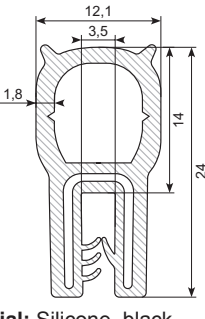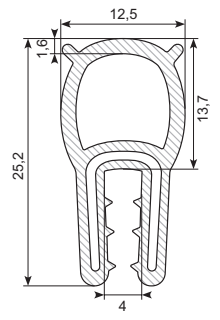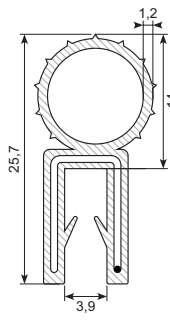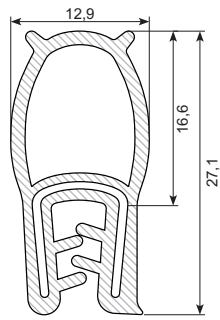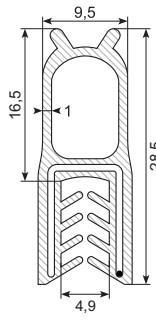Alle silikonekantlister kan laves med rustfri stålindlæg ved min. ordre 500 m
All silicone edge trims can be done with stainless insert at min. order. 500 m

33.528 *  Material: Silicone, black, FDA conform Grip range: 1,5 - 2 mm Hardness: SH 50 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m	33.526 *  Material: Silicone, black, FDA conform Grip range: 1 - 2 mm Hardness: SH 62 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m	33.535 *  Material: Silicone, black, FDA conform Grip range: 2 - 3 mm Hardness: SH 70 + - 5 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m	33.552 *  Material: Silicone, black, FDA conform Grip range: 1 - 2,5 mm Hardness: SH 50 + - 5 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m
33.555 *  Material: Silicone, black, FDA conform Grip range: 2 - 2,5 mm Hardness: SH 55 + - 5 Varmebestandig Heat resistant 200° C Min. order: 500 m	33.554 *  Material: Silicone, black, FDA conform Grip range: 1,5 - 2,5 Hardness: SH 65 + - 5 Varmebestandig Heat resistant 200° C Min. order: 500 m	33.513  Material: Silicone, black, FDA conform Grip range: 1,5 - 3,5 mm Hardness: SH 50 Insert: Wire Varmebestandig Heat resistant 200° C	33.512  Material: Silicone, black, FDA conform Grip range: 1,5 - 3,5 mm Hardness: SH 60 Insert: Wire Varmebestandig Heat resistant 200° C
33.511  Material: Silicone, black, FDA conform Grip range: 1,5 - 3,5 mm Hardness: SH 50 Insert: Wire Varmebestandig Heat resistant 200° C	33.556 *  Material: Silicone, black, FDA conform Grip range: 1 - 1,5 mm Hardness: SH 65 + - 5 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m	33.431A  Material: Silicone, grey RAL 7035, FDA conform Grip range: 2 - 4 mm Hardness: SH 60/60, solid balloon Insert: Wire Varmebestandig Heat resistant 200° C	33.550 *  Material: Silicone, black, FDA conform Grip range: 1,5 - 2,5 Hardness: SH 50 + 5 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m
33.553  Material: Silicone, black, FDA conform Grip range: 2 - 3 mm Hardness: SH 60 + - 5 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m	33.514 *  Material: Silicone, black, FDA conform Grip range: 2 - 3 mm Hardness: SH 75 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m	33.533 *  Material: Silicone, black, FDA conform Grip range: 1,5 - 3 mm Hardness: SH 40 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m	33.515 *  Material: Silicone, black, FDA conform Grip range: 1 - 2 mm Hardness: SH 75 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m

33.548 *  Material: Silicone, black, FDA conform Grip range: 2 - 3 mm Hardness: SH 60 + - 5 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m	33.551 *  Material: Silicone, black, FDA conform Grip range: 1,5 - 2,5 mm Hardness: SH 70 + - 5 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m	33.516  Material: Silicone, black, FDA conform Grip range: 2 - 3 mm Hardness: SH 75 Insert: Wire Varmebestandig Heat resistant 200° C	33.518 *  Material: Silicone, white, FDA conform Grip range: 2 - 3 mm Hardness: SH 60 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m
33.517 *  Material: Silicone, black, FDA conform Grip range: 1,5 - 2 mm Hardness: SH 50 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m	33.519 *  Material: Silicone, black, FDA conform Grip range: 2 - 2,5 mm Hardness: SH 45 Insert: Wire Varmebestandig Heat resistant 200° C	33.542 *  Material: Silicone, black, FDA conform Grip range: 1 Hardness: SH 65 + - 5 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m	33.544 *  Material: Silicone, black, FDA conform Grip range: 1 - 3 mm Hardness: SH 65 + - 5 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m
33.547 *  Material: Silicone, black, FDA conform Grip range: 2 - 3,5 mm Hardness: SH 60 + - 5 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m	33.546 *  Material: Silicone, black, FDA conform Grip range: 1 - 3 Hardness: SH 60 + - 5 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m	33.520 *  Material: Silicone co-ex, black and redbrown, FDA conform Grip range: 3 - 4 mm Hardness: SH 60 Density: 0,4 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m	33.543 *  Material: Silicone, black, FDA conform Grip range: 2 - 3,5 mm Hardness: SH 75 + - 5 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m
33.524  Material: Silicone, black, FDA conform Grip range: 3 - 4,5 mm Hardness: SH 55 Insert: Wire Varmebestandig Heat resistant 200° C	33.521  Material: Silicone, black, FDA conform Grip range: 3 - 4,5 mm Hardness: SH 50 Insert: Wire Varmebestandig Heat resistant 200° C	33.523 *  Material: Silicone, black, FDA conform Grip range: 1,5 - 2 mm Hardness: SH 60 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m	33.545 *  Material: Silicone, black, FDA conform Grip range: 1,5 - 3 mm Hardness: SH 60 + - 5 Insert: Wire Varmebestandig Heat resistant 200° C Min. order: 500 m

* Skaffevare Special order item

Alle silikonekantlister kan laves med rustfri stålindlæg ved min. ordre 500 m
 All silicone edge trims can be done with stainless insert at min. order. 500 m


33.525	33.848		
Material: Silicone, black, FDA conform Grip range: 3 - 4 mm Hardness: SH 50 Insert: Wire Varmebestandig <i>Heat resistant 200° C</i> Min. order: 500 m	Material: Silicone, black, FDA conform Grip range: 2 - 4 mm Hardness: SH 60 Insert: Wire Varmebestandig <i>Heat resistant 200° C</i> Min. order: 500 m		

















POM-profiler

POM-profiles







POM profiles have plastic inserts and can be an alternative to edgings with steel or metal inserts. POM profiles have many great properties:

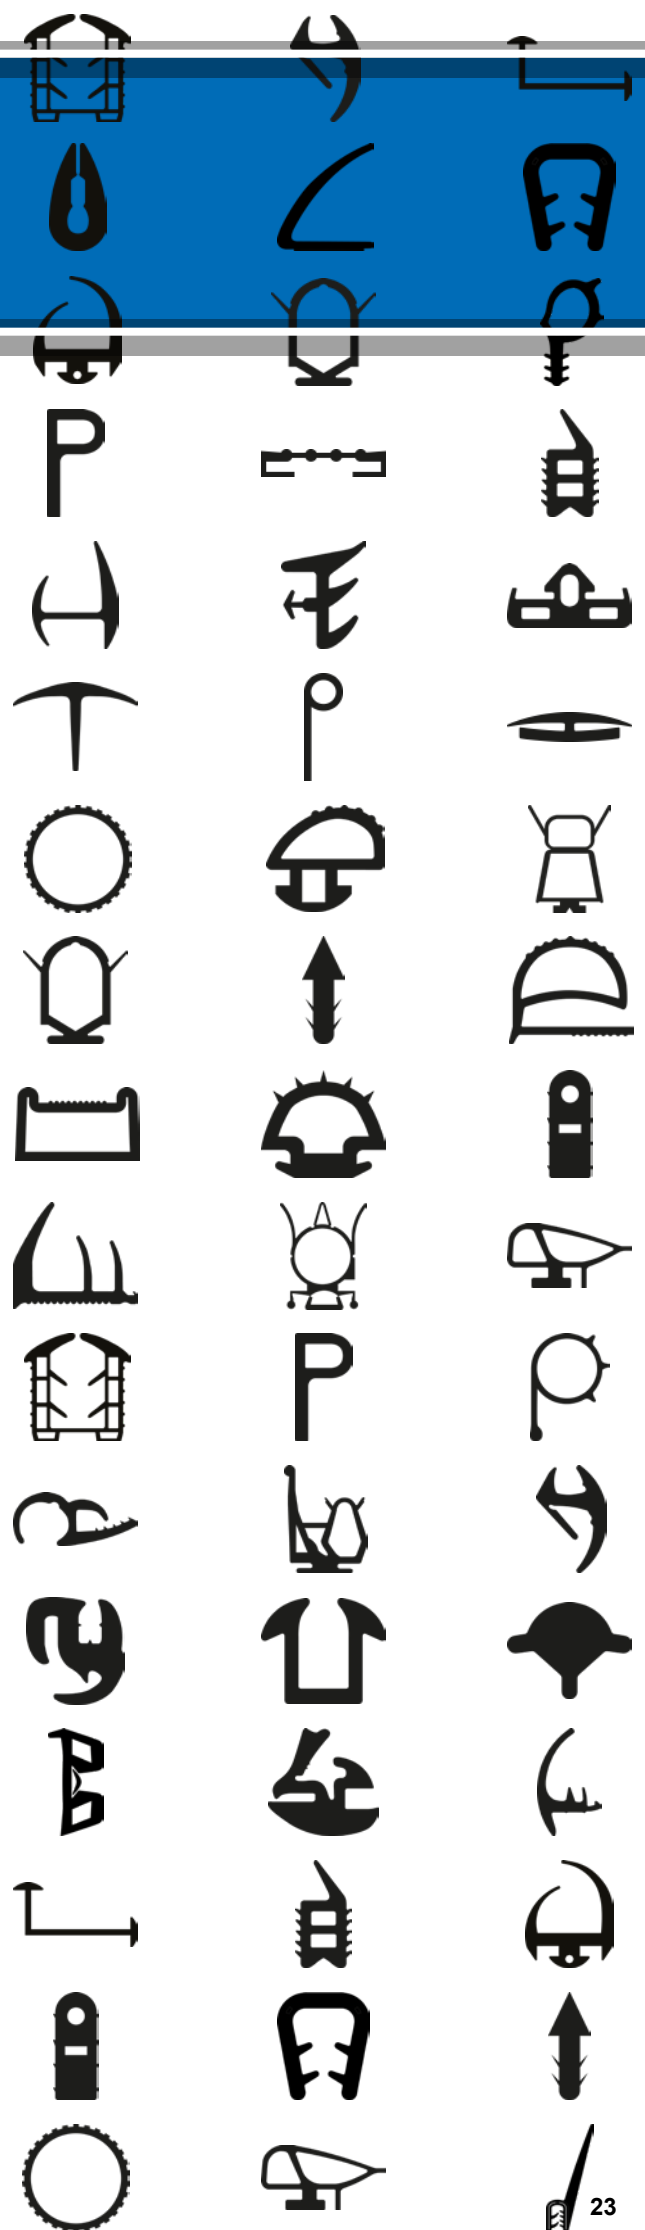- *Good flexibility*
- *Much lighter than metal-based profiles*
- *Cannot corrode or oxidize*
- *Safer mountin - no cuts from sharp metal edges*
- *Unlike profiles with metal inlays, POM-profiles are non-conductive and can therefore be used as a protection or surface material*



33.409POM ★ (33.409POMX)  Material: PVC + bi Grip range: 1 - 2,5 mm (0,5 - 2 mm) Hardness: SH 75 / 65 Insert: POM plastic Ingen rust, nem at skære <i>No rust, easy cutting</i>	33.410POMX  Material: PVC + bi Grip range: 0,8 - 1,5 mm Hardness: SH 75 / 65 Insert: POM plastic Ingen rust, nem at skære <i>No rust, easy cutting</i> Udgår: fejlleverance Discontinued: misdelivery	33.308POM  Material: PVC + bi Grip range: 1 - 3,5 mm Hardness: SH 75 / 65 Insert: POM plastic Ingen rust, nem at skære <i>No rust, easy cutting</i>	33.308POMG ★ (33.308POMXG)  Material: PVC + bi grey Grip range: 1 - 3,5 mm (2 - 4,5 mm) Hardness: SH 75 / 65 Insert: POM plastic Ingen rust, nem at skære <i>No rust, easy cutting</i>
33.200POM ★ (33.200POMX)  Material: PVC + bi Grip range: 2 - 5 mm (1 - 4 mm) Hardness: SH 75 / 65 Insert: POM plastic Ingen rust, nem at skære <i>No rust, easy cutting</i>	33.201POM ★  Material: PVC + bi Grip range: 2 - 4 mm Hardness: SH 75 / 65 Insert: POM plastic Ingen rust, nem at skære <i>No rust, easy cutting</i> Min. order: 2.000 m	33.203POM ★ (33.203POMX)  Material: PVC + bi Grip range: 6 - 8 mm Hardness: SH 75 / 65 Insert: POM plastic Ingen rust, nem at skære <i>No rust, easy cutting</i>	33.210POM ★ (33.210POMX)  Material: TPE co-ex Grip range: 1,5 - 2,5 mm (1 - 2 mm) Hardness: SH 75 Density: 0,65 Insert: POM plastic Ingen rust, nem at skære <i>No rust, easy cutting</i> Min. order: 1.000 m
33.211POM ★  Material: TPE co-ex Grip range: 1,5 - 3 mm Hardness: SH 75 Density: 0,65 Insert: POM plastic Ingen rust, nem at skære <i>No rust, easy cutting</i>	33.212POM ★  Material: TPE co-ex Grip range: 2 - 4 mm Hardness: SH 75 Density: 0,65 Insert: POM plastic Ingen rust, nem at skære <i>No rust, easy cutting</i> Min. order: 2.000 m	33.220POM  Material: TPE Grip range: 1,5 - 2,5 mm Hardness: SH 75 Density: 0,65 Insert: POM plastic Ingen rust, nem at skære <i>No rust, easy cutting</i>	33.221POM  Material: TPE Grip range: 2 - 4 mm Hardness: SH 75 Insert: POM plastic Ingen rust, nem at skære <i>No rust, easy cutting</i>
33.460-6XLPOM  Material: PVC+bi / sponge rubber Grip range: 2,5 - 5 mm Hardness: SH 75 / 57 Density: 0,6 Insert: POM plastic Ingen rust, nem at skære <i>No rust, easy cutting</i>	33.214POM ★  Material: TPE co-ex Grip range: 1,5 - 3 mm Hardness: SH 75 Density: 0,65 Insert: POM plastic Ingen rust, nem at skære <i>No rust, easy cutting</i> Min. order: 2.000 m	33.213POMX2  Material: TPE co-ex Grip range: 1 - 2,5 mm Hardness: SH 75 Density: 0,65 Insert: POM plastic Ingen rust, nem at skære <i>No rust, easy cutting</i>	33.215POM ★  Material: TPE co-ex Grip range: 1 - 2 mm Hardness: SH 75 Density: 0,65 Insert: POM plastic Ingen rust, nem at skære <i>No rust, easy cutting</i> Min. order: 2.000 m

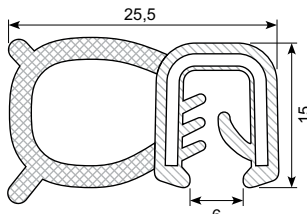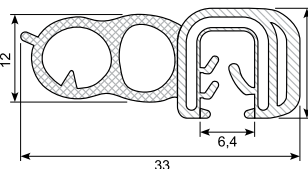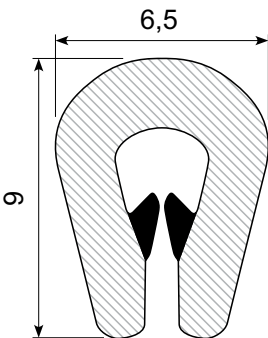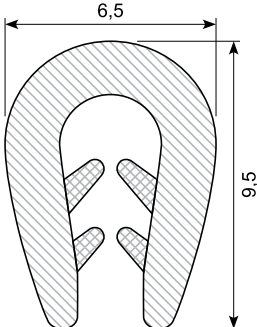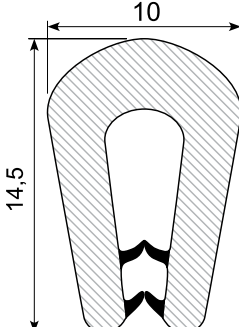
★ Skaffevare Special order item

33.216POM	33.217POM	33.218POM	33.424
 Material: TPE co-ex Grip range: 1,5 - 3 mm Hardness: SH 75 Density: 0,65 Insert: POM plastic Ingen rust, nem at skære <i>No rust, easy cutting</i>	 Material: TPE co-ex Grip range: 1,5 - 4 mm Hardness: SH 75 Density: 0,65 Insert: POM plastic Ingen rust, nem at skære <i>No rust, easy cutting</i> Min. order: 2.000 m	 Material: TPE co-ex Grip range: 1,5 - 4 mm Hardness: SH 75 Density: 0,65 Insert: POM plastic Ingen rust, nem at skære <i>No rust, easy cutting</i> Min. order: 2.000 m	 Material: TPE + bi Grip range: 0,8 - 2,5 mm Hardness: SH 87 / 65 - 70 Insert: None Alternative: 33.424TPEX
33.424TPEX (33.424TPE)	33.417TPEX (33.417TPE)		
 Material: TPE + bi Grip range: 1 - 2 mm (0,5 - 1,5 mm) Hardness: SH 90 / 50 Insert: None	 Material: TPE + bi Grip range: 1 - 4 mm (0,5 - 2 mm) Hardness: SH 90 / 50 Insert: None		


Rubber cord

Rubber cord profiles are used as gasket material and can be inserted in a cutout or glued on.

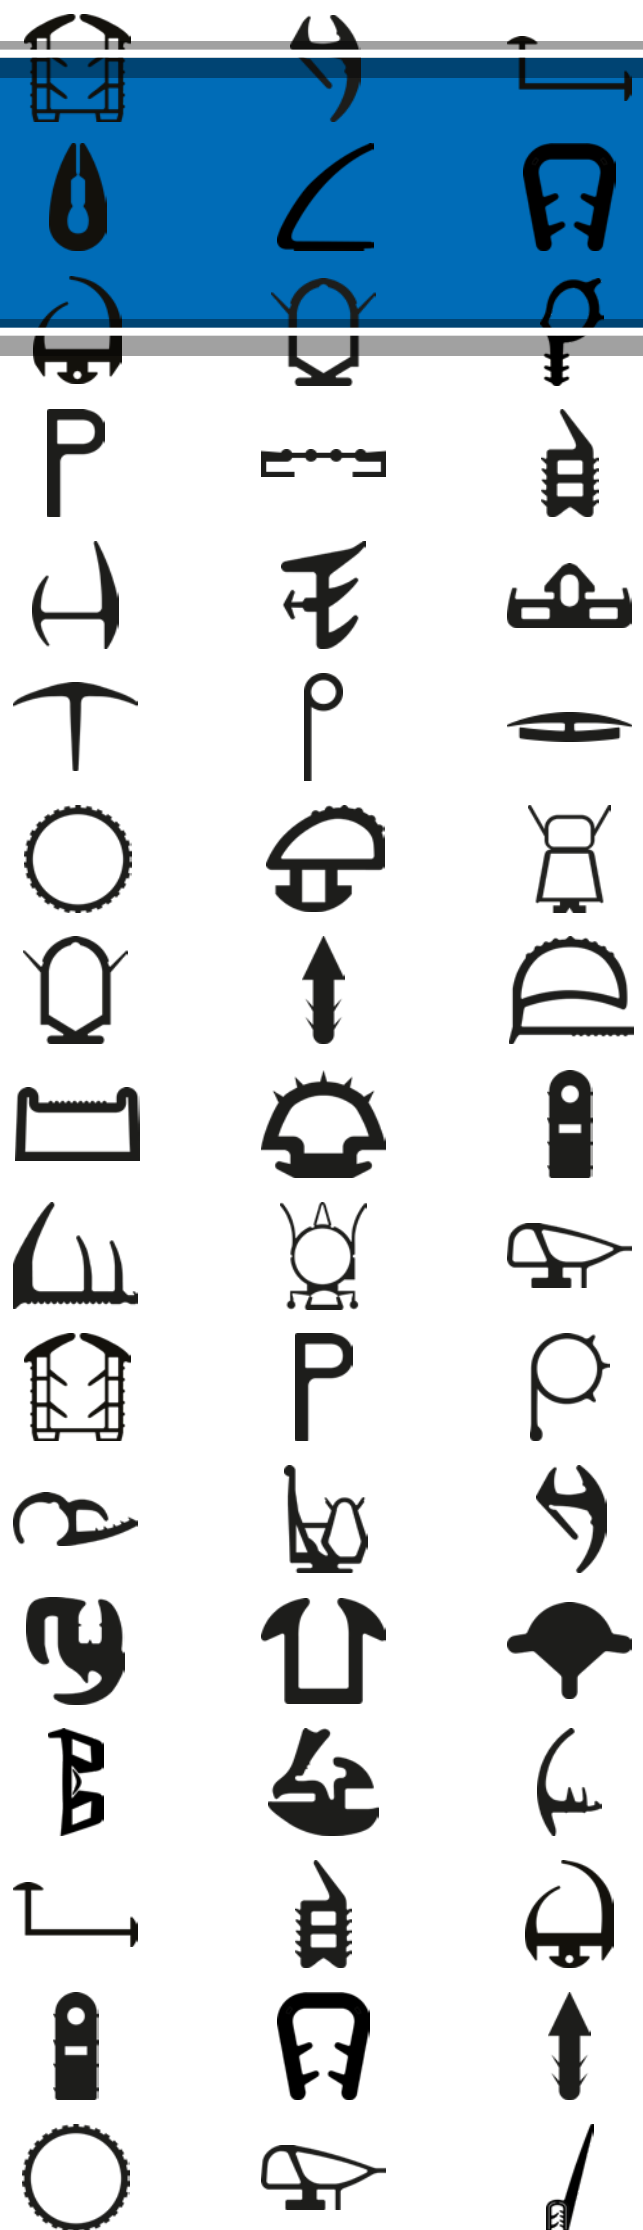Whatever rubber cord profile you need, we have the solution for you. In our assortment we have rubber cord profiles in different sizes (from 1 - 40 mm) and materials. The rubber cords can be used for many purposes.



Gummisnor *Rubber cord*



EPDM, sort *black* Shore A 65 - 70

Varenr. <i>Item no.</i>	Ø
30.101 *	1 mm
30.101.25 *	1,25 mm
30.101.5	1,5 mm
30.102	2 mm
30.102E *	2 mm <i>Single cord</i>
30.103E *	3 mm
30.103EX	3 mm
30.104E *	4 mm
30.104.5E *	4,5 mm
30.105E	5 mm
30.106E	6 mm
30.107E	7 mm
30.108E	8 mm
30.109E	9 mm
30.110E	10 mm
30.112E *	12 mm
30.113E	13 mm
30.114E *	14 mm
30.115E *	15 mm
30.116E *	16 mm
30.117E	17 mm
30.118E	18 mm
30.119E	19 mm
30.120E	20 mm
30.121E *	21 mm
30.122E	22 mm
30.124E	24 mm
30.125E *	25 mm
30.135E *	35 mm <i>(SH 75)</i>

CR, sort *black* Shore A 60

Varenr. <i>Item no.</i>	Ø
30.103CR *	3 mm
30.103.5CR *	3,5 mm
30.104CR	4 mm
30.104.5CR *	4,5 mm
30.105CR *	5 mm
30.105.3CR *	5,3 mm
30.105.7CR *	5,7 mm
30.106CR *	6 mm
30.106.5CR *	6,5 mm
30.107CR *	7 mm
30.107.5CR *	7,5 mm
30.108CR *	8 mm
30.108.4CR *	8,4 mm
30.109CR *	9 mm
30.109.5CR *	9,5 mm
30.110CR *	10 mm
30.111CR *	11 mm
30.112CR *	12 mm
30.113CR *	13 mm
30.114CR *	14 mm
30.115CR *	15 mm
30.116CR *	16 mm
30.118CR	18 mm
30.120CR *	20 mm
30.122CR *	22 mm
30.125CR *	25 mm
30.130CR *	30 mm
30.132CR *	32 mm
30.140CR *	40 mm
30.150CR *	50 mm

NBR, sort *black* Shore A 65

Varenr. <i>Item no.</i>	Ø
30.102NBR *	2 mm
30.103NBR	3 mm
30.103.5NBR *	3,5 mm
30.104NBR *	4 mm
30.104.5NBR *	4,5 mm
30.105NBR *	5 mm
30.105.3NBR *	5,3 mm
30.105.7NBR *	5,7 mm
30.106NBR *	6 mm
30.106.5NBR *	6,5 mm
30.107NBR *	7 mm
30.107.5NBR *	7,5 mm
30.108NBR *	8 mm
30.108.4NBR *	8,4 mm
30.109NBR *	9 mm
30.109.5NBR *	9,5 mm
30.110NBR *	10 mm
30.111NBR *	11 mm
30.112NBR *	12 mm
30.113NBR *	13 mm
30.114NBR *	14 mm
30.116NBR *	16 mm
30.118NBR *	18 mm
30.120NBR *	20 mm
30.122NBR *	22 mm
30.125NBR *	25 mm
30.130NBR *	30 mm
30.132NBR *	32 mm
30.135NBR *	35 mm
30.140NBR *	40 mm

Silicone, gennemsigtig *translucent* Shore A 60

Varenr. <i>Item no.</i>	Ø
30.103SIH *	3 mm
30.104SIH *	4 mm
30.105SIH	5 mm
30.106SIH	6 mm
30.108SIH *	8 mm
30.108SIHX *	8 mm

Elastiksnor *Elastic cord*


Varenr. <i>Item no.</i>	Ø
50.260-4	4 mm
50.260-5	5 mm
50.260-6	6 mm
50.260-8	8 mm
50.260-10	10 mm
50.260-10T <i>Trampoline cord, black</i>	10 mm




* Skaffevare *Special order item*

Special profiles

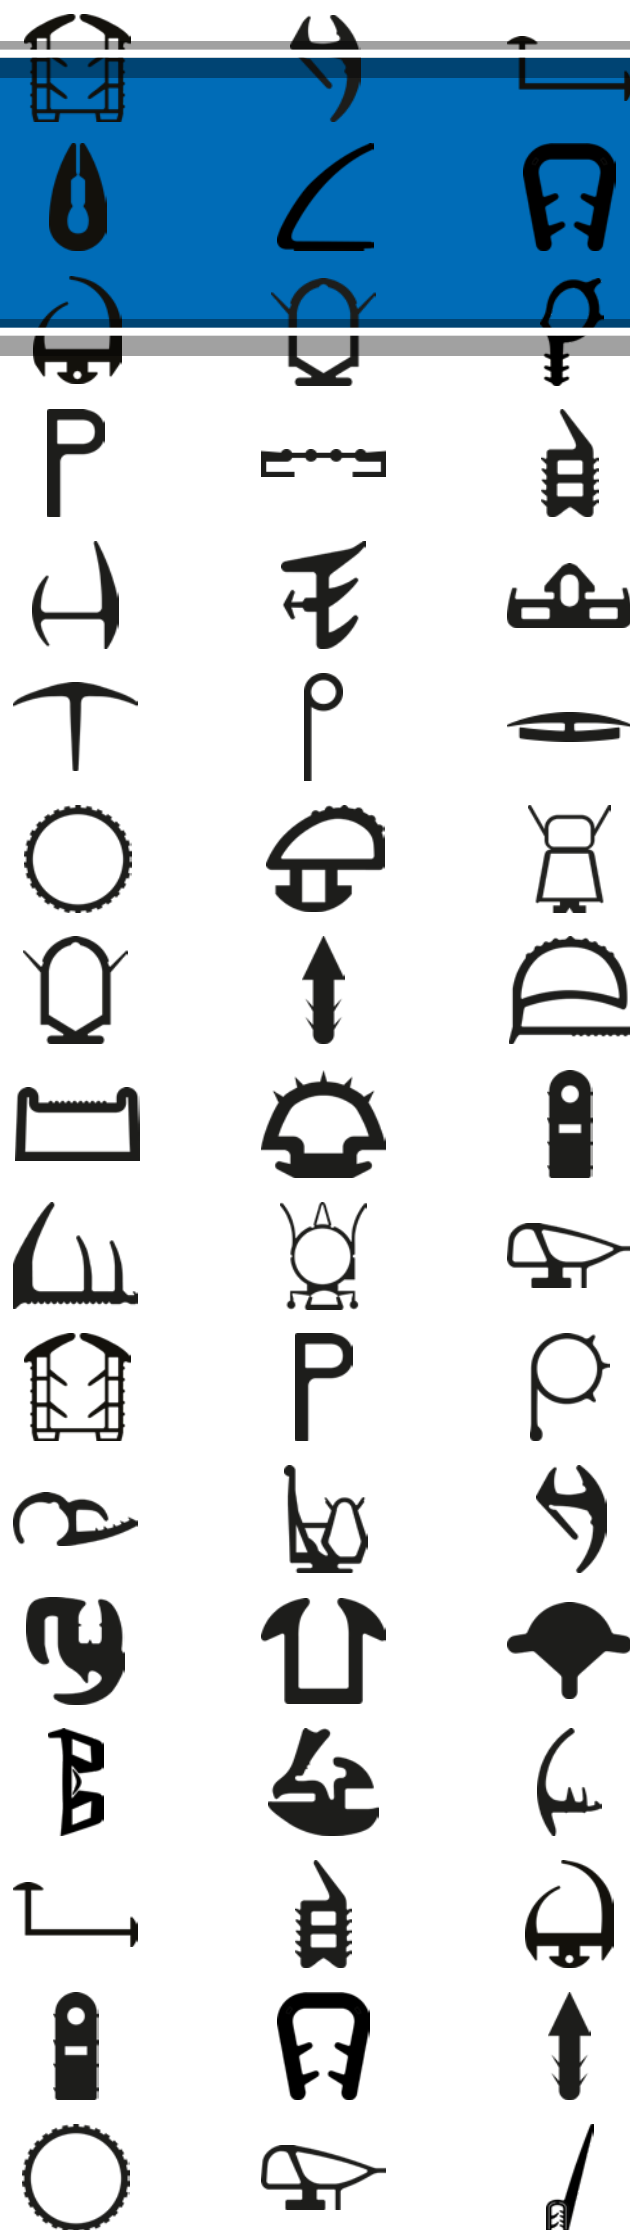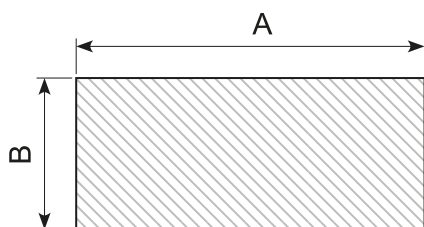In this group you will find some of our almost 7.000 special profiles. They are used as a seal between two surfaces.





















More sizes are available.

















Varenr. Item no.	Materiale Material	A	B	Hårdhed Hardness	Klæb Adhesive	Min. order
30.1201KE *	EPDM	12 mm	1 mm	SH 65	Ja Yes	2.000 m
30.2005E *	EPDM	20 mm	5 mm	SH 65	Nej No	3.000 m
30.2310E *	EPDM	23 mm	10 mm	SH 60	Nej No	500 m
30.2505E *	EPDM	25 mm	5 mm	SH 65	Nej No	3.000 m
30.2525E	EPDM	25 mm	25 mm	SH 45	Nej No	
30.3003E	EPDM	30 mm	3 mm	SH 65	Nej No	
30.3006E *	EPDM	30 mm	6 mm	SH 65	Nej No	3.000 m
30.3305E *	EPDM	33 mm	5 mm	SH 65	Nej No	3.000 m
30.3310E *	EPDM	33 mm	10 mm	SH 65	Nej No	2.000 m
30.4003E	EPDM	40 mm	3 mm	SH 65	Nej No	
30.5003E	EPDM	50 mm	3 mm	SH 65	Nej No	
30.5003K	SBR	50 mm	3 mm	SH 70	Ja Yes	
30.5004E *	EPDM	50 mm	4 mm	SH 60	Nej No	600 m
30.5005E *	EPDM	50 mm	5 mm	SH 65	Nej No	2.000 m
30.5010E *	EPDM	50 mm	10 mm	SH 65	Nej No	1.500 m
30.5808E *	EPDM	58 mm	8 mm	SH 65	Nej No	1.500 m
30.6502.5E *	EPDM	65 mm	2,5 mm	SH 65	Nej No	500 m
30.6705E *	EPDM	67 mm	5 mm	SH 65	Nej No	2.000 m
30.6710E *	EPDM	67 mm	10 mm	SH 65	Nej No	1.000 m
30.7505E *	SBR	75 mm	5 mm	SH 65	Nej No	1.500 m
30.10003K	EPDM	100 mm	3 mm	SH 70	Ja Yes	
30.10005E *	EPDM	100 mm	5 mm	SH 65	Nej No	1.500 m
30.15005E *	EPDM	150 mm	5 mm	SH 65	Nej No	1.000 m
30.15005KE	EPDM	150 mm	5 mm	SH 65	Ja Yes	

Flere størrelser kan skaffes ved forespørgsel
Other sizes can be obtained on request

















30.262S	30.WI660	30.7367	30.9691-5500 *
Material: EPDM, black Hardness: SH 65 - 75	Material: EPDM Hardness: SH 60 External: 40 x 45 x 5 mm	Material: CR, black Hardness: SH 65 Betinget oliebestandig Conditional oil resistant	Material: EPDM, white Hardness: SH 65 Fixed length: 5.500 mm Min. order: 1.100 m
30.7696	30.12759	30.OT1024 */ 30.OT1024B	30.216S
Material: CR, black Hardness: SH 65 Betinget oliebestandig Conditional oil resistant	Material: EPDM, black Hardness: SH 60	Material: Silicone Hardness: SH 60 With adhesive 30.OT1024 *: White 30.OT1024B: Black	Material: EPDM, black Hardness: SH 65

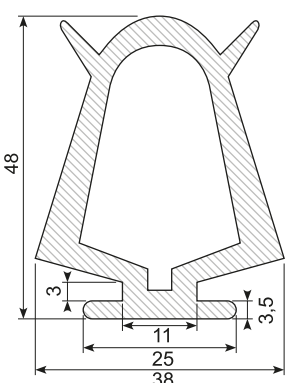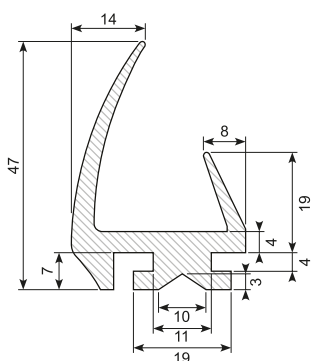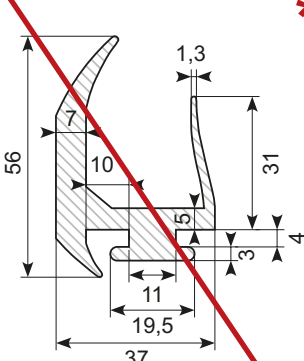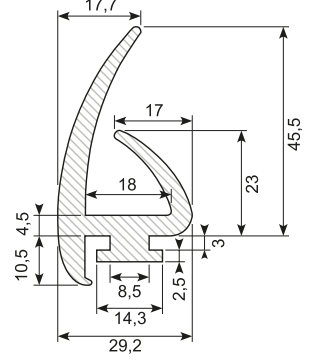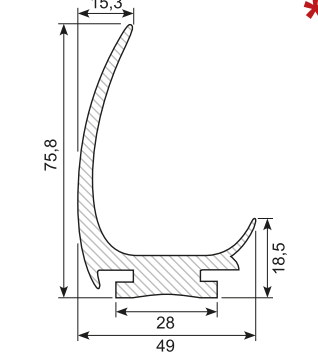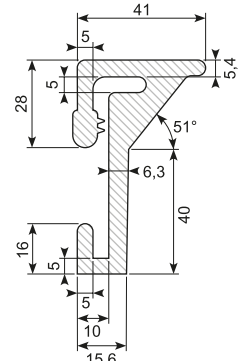* Skaffevare Special order item

















30.218S  Material: EPDM, black Hardness: SH 75 - 81	30.220L  Material: CR, black Hardness: SH 65 Length: 6,5 m Betinget oliebestandig <i>Conditional oil resistant</i>	30.331  Material: EPDM, black Hardness: SH 70	30.9996-10  Material: EPDM Hardness: SH 70
41.675A / 41.674A  Material: Aluminium 41.674A: 5 m anodiseret <i>anodized</i> 41.675A: 5,2 m ubehandlet <i>untreated</i>	39.1208P  Fenderprofil med kanal <i>Fender profile with channel</i> Material: PE Length: 3 m	30.12957-1 *  Material: EPDM Hardness: SH 65 Length: 2,5 m Min. order: 160 pcs.	30.7933  H-profil til aluminiumsskinne <i>H-profile for aluminium rail</i> Material: EPDM Hardness: SH 70
30.12957-2  Material: EPDM Hardness: SH 65 Length: 4,3 m	30.14226 *  Material: EPDM Hardness: SH 60 Min. order: 1.000 m	30.7932  Gummiprofil til alu-skinne <i>Rubber profile for alu-track</i> Material: EPDM Hardness: SH 70	30.7935 *  Material: EPDM, black Hardness: SH 65 Length: 2,8 m Min. order: 22,4 m
30.7652  Material: EPDM Hardness: SH 65	30.333X  L-profile Material: EPDM Hardness: SH 70 Rulle med <i>Roll of</i> 50 m	41.333S  Stålprofil til montering af gummiprofil 30.333 <i>Steel profile for mounting of rubber profile 30.333</i> Length: 2,6 m	30.8469 *  Læsebagsmækprofil med vandnæse, alu. <i>Rubber profile with drip cap.</i> For loading tail board Material: EPDM Hardness: SH 67 Length: 8 m Min. order: 80 m

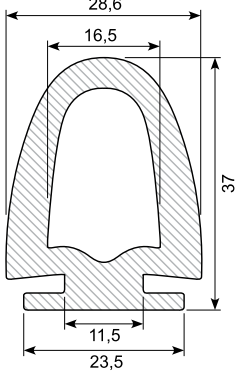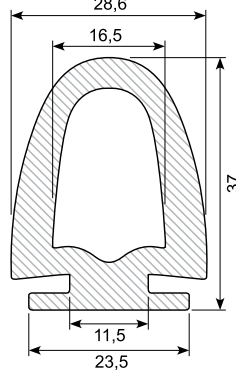41.678  Alu C-profil Length: 5,2 m Passer til <i>Fits 30.8469</i>	30.325X  Material: EPDM, black Hardness: SH 65 Length: 5 m	30.324S  Material: EPDM, black Hardness: SH 65 Length: 5 m	30.324SB  Material: EPDM, black Hardness: SH 45 (blød <i>soft</i>) Length: 5 m
30.7649-8  D-tætningsprofil <i>D-weatherstrip</i> Material: EPDM, black Hardness: SH 60 Min. order: 1.000 m	30.7649  D-tætningsprofil <i>D-weatherstrip</i> Material: EPDM, black Hardness: SH 60	30.7649-12  D-tætningsprofil <i>D-weatherstrip</i> Material: EPDM, black Hardness: SH 60 Min. order: 1.000 m	30.12957-3  Material: EPDM Hardness: SH 60
30.14098-2  Material: EPDM Hardness: SH 60	30.9691-3  Material: EPDM, black Hardness: SH 65	30.7650  D-tætningsprofil <i>D-weatherstrip</i> Material: EPDM Hardness: SH 70	30.5881  Material: CR, black Hardness: SH 65 Betinget oliebestandig <i>Conditional oil resistant</i>
30.2151  Skørteprofil <i>Skirt profile</i> Hardness: PVC, <i>white</i> Rulle med <i>Roll of</i> 14 m Min. order: 560 m	30.6648 / 30.6648G / 30.6648S  Skørteprofil <i>Skirt profile</i> Hardness: SH 75 30.6648: EPDM black 30.6648G *: TPE <i>grey</i> 30.6648S *: TPE black	30.2151S  Material: PVC, black Hardness: SH 75 - 80 Min. order: 280 m	30.2566  Skørteprofil <i>Skirt profile</i> Material: PVC, black Hardness: SH 80 Height: 125 mm Rulle med <i>Roll of</i> 64 m

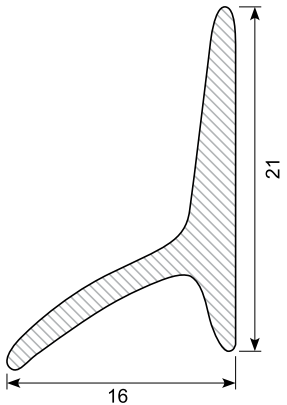















* Skaffevare Special order item

















30.257S  Material: EPDM, black Hardness: SH 65	30.7780/4  Material: EPDM, black Hardness: SH 65 Length: 4 m	30.7300 / 30.7300/4  Material: EPDM, black Hardness: SH 65 30.7300: length: 3 m 30.7300/4: length: 4 m	30.7300/4Y *  Material: EPDM, yellow Hardness: SH 65 Min. order: 64 m
30.6944 *  Material: EPDM, black Hardness: SH 65 Min. order: 200 m	30.5550M  Material: EPDM, black Hardness: SH 65	30.2653 *  Material: EPDM, black Hardness: SH 65 Min. order: 1.000 m	30.5981  Material: EPDM, black Hardness: SH 65
30.8199  Material: EPDM, black Hardness: SH 65 Length: 4 m	30.8199W *  Material: EPDM, white Hardness: SH 65 Length: 4 m Min. order: 223 m	30.314S  Gummiprofil <i>Rubber profile</i> Material: EPDM Hardness: SH 60 / 65	30.7651  Ballonprofil <i>Balloon profile</i> Material: EPDM Hardness: SH 65
30.313  Co-ex profile Material: EPDM / sponge rubber Hardness: SH 80 Med klæb <i>With adhesive</i>	30.7648  Material: EPDM, black Hardness: SH 65	30.7106 *  Material: EPDM, black Hardness: SH 65 Min. order: 1.000 m	30.315S  Material: EPDM, black Hardness: SH 65 Length: 10 m

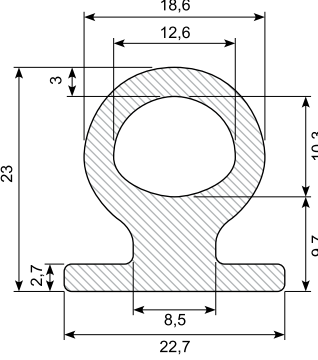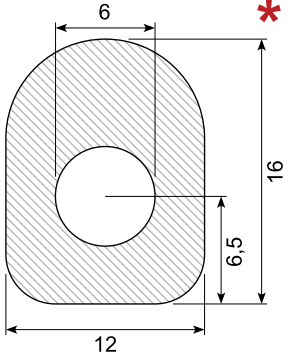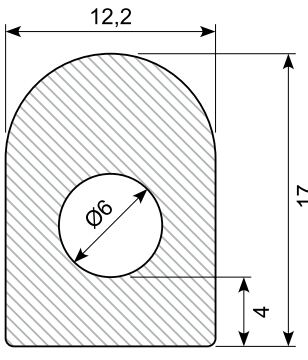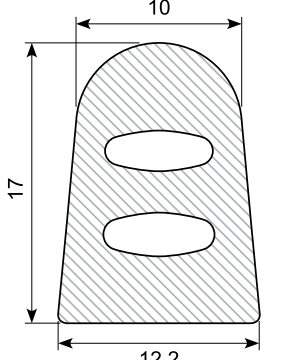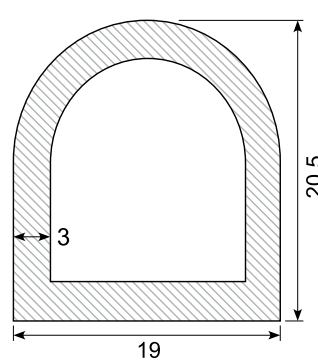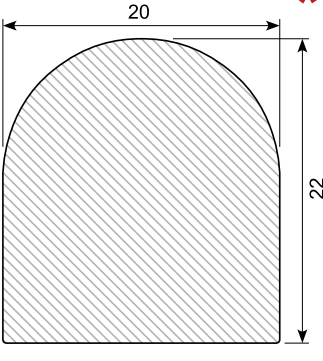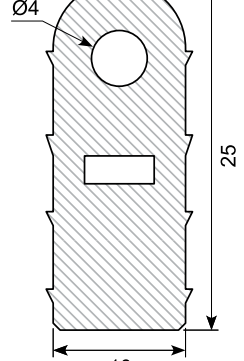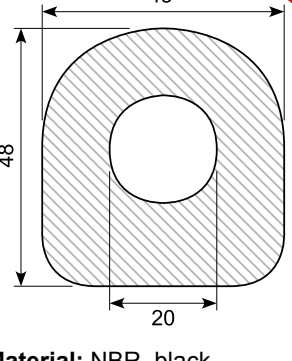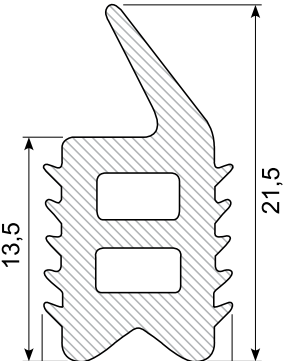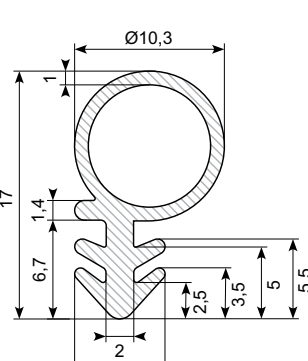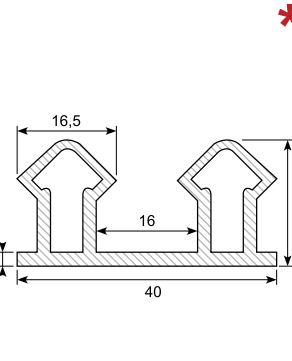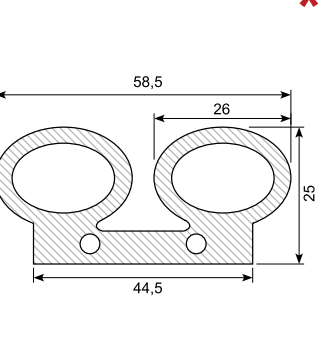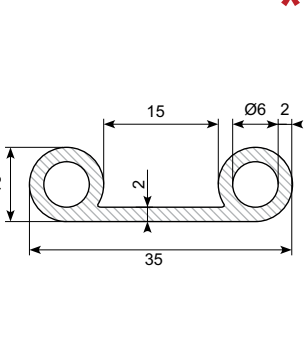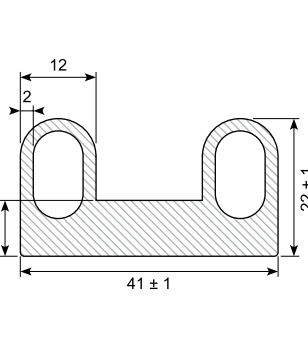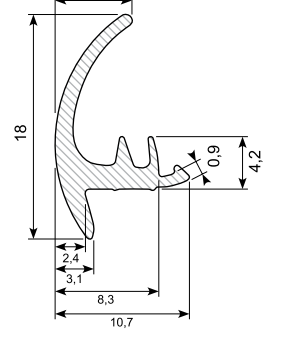* Skaffevare Special order item

















30.315SB  Material: EPDM, black Hardness: SH 45 Length: 10 m	30.50967 *  Material: NBR, black Hardness: SH 65 Oliebeständig Oil resistant Min. order: 500 m	30.13841  Material: NBR, black Hardness: SH 45 Oliebeständig Oil resistant	30.14053  Material: NBR, black Hardness: SH 50 Oliebeständig Oil resistant
30.OT3354  Material: Silicone, white Hardness: SH 60	30.7645 *  Material: EPDM, black Hardness: SH 45 Min. order: 50 m	30.13421  Material: EPDM Hardness: SH 65	30.7559 *  Material: NBR, black Hardness: SH 60 Oliebeständig Oil resistant Min. order: 30 m
30.14130  Co-ex profile Material: EPDM Hardness: SH 70 Density: 85 - 95	30.190  Material: PVC Hardness: SH 57	30.OT10644  Material: Silicone, light grey Ø10 mm balloon	30.OT1387 *  Material: Silicone, grey Hardness: SH 60 Min. order: 40 m
30.OT3272 *  Material: Silicone, blue Hardness: SH 60 Min. order: 50 m	30.1428 *  Material: Silicone, red/brown Hardness: SH 60	30.15170  Material: PVC, black Hardness: SH 72	32.8518  Rudeprofil End-stop profile Material: EPDM Hardness: SH 65 Rulle med Roll of 50 m

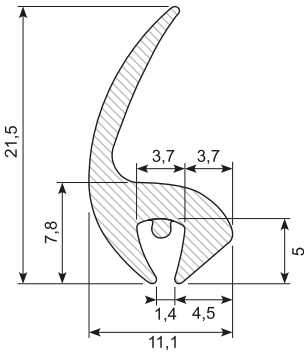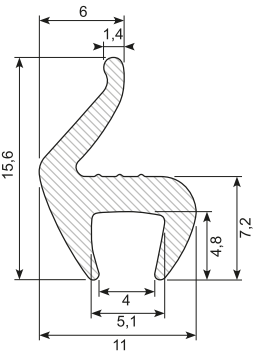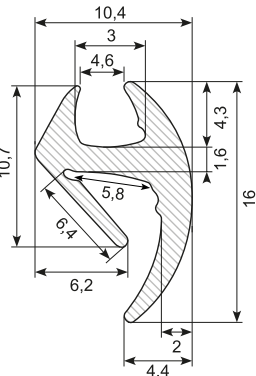







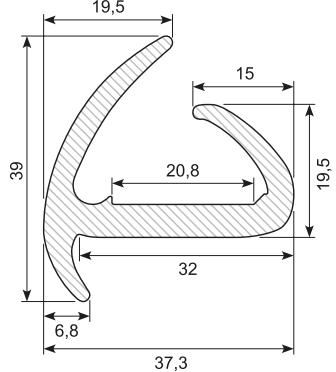


* Skaffevare Special order item

32.8517  Rudeprofil End-stop profile Material: EPDM Hardness: SH 65 Rulle med Roll of 50 m	32.8520  Rudeprofil End-stop profile Material: EPDM Hardness: SH 65 Rulle med Roll of 50 m	31.369  Rudeprofil End-stop profile Material: EPDM, black Hardness: SH 65	30.798  Material: EPDM, black Hardness: SH 65
30.14163-1  Material: EPDM Hardness: SH 65	30.144  Material: EPDM, black Hardness: SH 60	30.5179  Material: EPDM	30.141  Material: EPDM Hardness: SH 60
30.142S  Material: EPDM, black Hardness: SH 65	30.14163  Material: EPDM Hardness: SH 65	30.8331  Material: EPDM, black Hardness: SH 65	30.145  Material: EPDM, black Hardness: SH 70 Min. order: 200 m
30.13447-8  Container profile Material: EPDM Hardness: SH 70 Length: 2,5 m Min. order: 500 m	30.7663  Material: EPDM, black Hardness: SH 65 Length: 5 m	30.340  Material: EPDM, black Hardness: SH 50 Length: 3 m	30.2438  Material: EPDM, black Hardness: SH 65 Length: 2,2 m

30.4437  Material: EPDM, black Hardness: SH 60 Min. order: 85 m	30.7411  Material: EPDM, black Hardness: SH 65 Grip range: 1 - 1,5 mm	34.7528-2  Material: PVC, grey	30.21202300  Material: EPDM Hardness: SH 70A For 6 mm glasplade Min. order: 50 m
30.762  Material: EPDM, black Hardness: SH 65	30.7266  Material: EPDM, black Hardness: SH 65 Min. order: 50 m	30.12932-2  Material: EPDM, black Hardness: SH 60 Min. order: 400 m	30.16688  Material: EPDM Hardness: SH 70
30.13049-4  Material: EPDM, black Hardness: SH 60	30.13049-2  Material: EPDM Hardness: SH 60 Min. order: 5.000 m	30.13049-1  Material: EPDM Hardness: SH 60 Min. order: 4.000 m	30.13049-5  Material: EPDM, black Hardness: SH 60
30.4469  Material: EPDM Hardness: SH 60 Silikoniseret <i>Coated with silicone</i>	30.10485  Material: EPDM Silikoniseret <i>Coated with silicone</i>	30.9387-2  Material: EPDM Med indvendig snor <i>With internal cord</i> Min. order: 5.000 m	31.702  Material: EPDM, black Hardness: SH 70 Min. order: 2.000 m

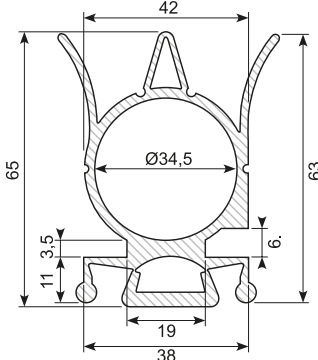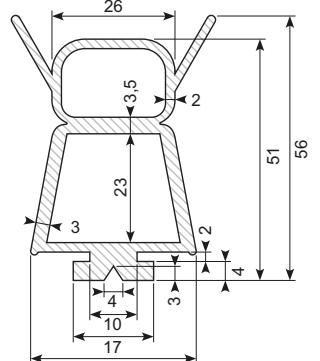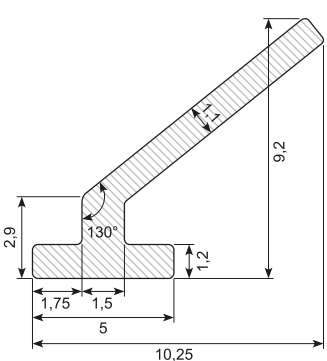* Skaffevare Special order item


30.10461-2 *  Profil med fod og indvendig snor. Profile with foot and internal cord. Material: EPDM, with cord Min. order: 3.000 m	52.PP106 *  Kabel overkørsel Cable transmission Material: NR / SBR Rulle med Roll of 9 m	30.13503  Material: EPDM, black Hardness: SH 60 For skinne For rail: 41.13459	41.13459 *  Aluprofil for port, eloxeret overflade. Aluprofile for gate, anodized surface. Length: 6 m Calculated weight: 479 g/m For profile: 30.13503
41.13459X *  Aluprofil for port, eloxeret overflade. Aluprofile for gate, anodized surface. Length: 6 m Calculated weight: 239 g/m For profile: 30.13503 Min. order: 50 pcs. + add on costs	30.9215  Material: EPDM Hardness: SH 65 - 70	30.9826-1  Material: EPDM Hardness: SH 70	30.9826-2  Material: EPDM Hardness: SH 70
30.10036  Material: EPDM Hardness: SH 70	30.13242 *  Material: EPDM co-ex Hardness: SH 85 / 62 Length: 3.000 mm For skinne For rail: 41.670 Min. order: 3.000 m	41.670  Eloxeret aluminium 3 m med montagehuller. Ø4 hver 200 mm. For profile 30.13242	30.16239  Material: EPDM Hardness: SH 70
30.9996-5  Material: EPDM Hardness: SH 70	30.9387-1  Material: EPDM Hardness: SH 70 Med indvendig snor With internal cord	30.9996-4  Material: EPDM Hardness: SH 70	30.9437-125  Ventilation ring Material: EPDM, black Hardness: SH 60 - 65








































30.9437-160	30.9437-200	30.9437-250	30.9437-315
 Ventilation ring Material: EPDM, black Hardness: SH 60 - 65	 Ventilation ring Material: EPDM, black Hardness: SH 60 - 65	 Ventilation ring Material: EPDM, black Hardness: SH 60 - 65	 Ventilation ring Material: EPDM, black Hardness: SH 60 - 65
30.9437-400	45.205SX	45.209BX	45.210BX
 Ventilation ring Material: EPDM, black Hardness: SH 60 - 65	 Material: PVC, silver grey Min. order: 3.000 m	 Material: PVC, black	 Material: PVC, white
45.210C / 45.210CX	45.208	41.406	
 Material: PVC, off white	 Material: PVC, blue	 Vandrende, upoleret Water gutter, unpolished Size: 17 x 24 Length: 5 m	




































Silicone profiles (special order items)





































Here you can find a selection of the silicone profiles we can provide on order.

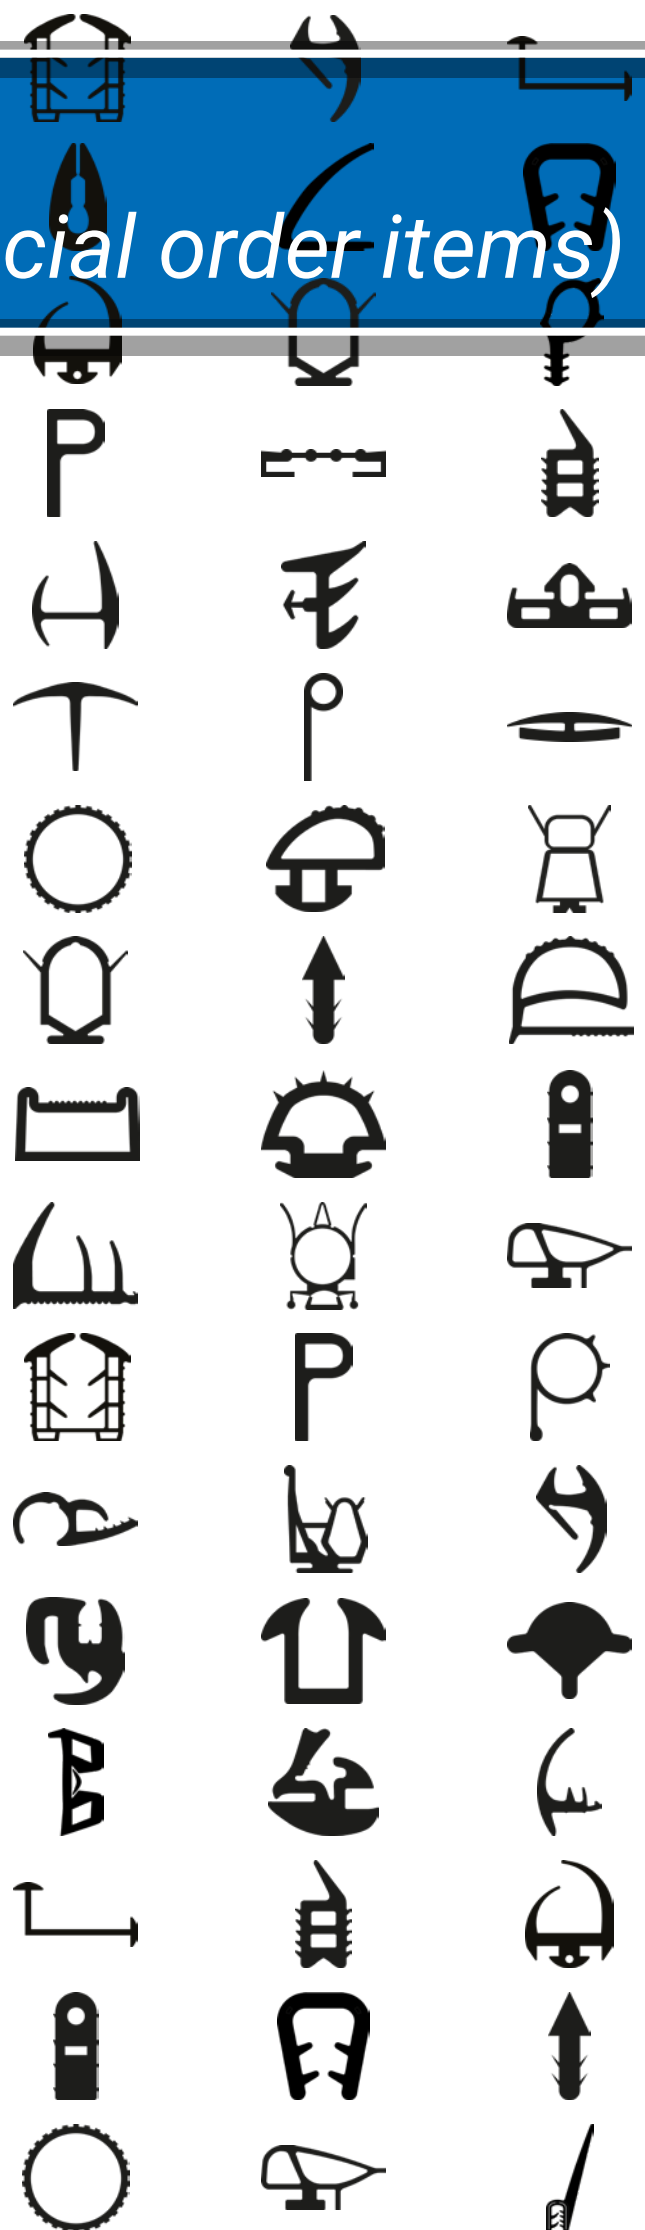



















We have a much wider selection than shown in this catalog, so please contact us if you can't find what you're looking for.



Group 0010	Group 0021	Group 0023	Group 0107	Group 0030
				
Group 0011	Group 0175	Group 0201	Group 0106	Group 0120
				
Group 0012	Group 0022	Group 0024	Group 0209	Group 0124
				
Group 0020	Group 0101	Group 0025	Group 0111	Group 0126
				
Group 0121	Group 0100	Group 0109	Group 0110	Group 0125
				
Group 0139	Group 0108	Group 0153	Group 0112	Group 0160
				
Group 0150	Group 0186	Group 0169	Group 0192	Group 0159
				
Group 0178	Group 0113	Group 0208	Group 0214	Group 0119
				


Group 0102	Group 0104	Group 0129	Group 0127	Group 0171
				
Group 0517	Group 0145	Group 0130	Group 0191	Group 0516
				
Group 0102A	Group 0179	Group 0131	Group 0206	Group 0144
				
Group 0103	Group 0105	Group 0132	Group 0134	Group 0194
				
Group 0103A	Group 0172	Group 0133	Group 0211	Group 0147
				
Group 0146	Group 0188	Group 0181	Group 0167	Group 0128
				
Group 0199	Group 0158	Group 0170	Group 0140	Group 0137
				
Group 0155	Group 0141	Group 0207	Group 0508	Group 0148
				

















Group 0122	Group 0176	Group 0177	Group 0143	Group 0164
				
Group 0123	Group 0197	Group 0165	Group 0117	Group 0166
				
Group 0157	Group 0173	Group 0182	Group 0187	Group 0138
				
Group 0151	Group 0189	Group 0190	Group 0115	Group 0196
				
Group 0200	Group 0152	Group 0215	Group 0210	Group 0205
				
Group 0180	Group 0168	Group 0198	Group 0213	Group 0163
				
Group 0156	Group 0142	Group 0154	Group 0512	Group 0193
				
Group 0183	Group 0202	Group 0116	Group 0510	Group 0193
				

Group 0514	Group 0195	Group 0501	Group 0174	Group 0507
				
Group 0203	Group 0502	Group 0184	Group 0212	Group 0503
				
Group 0184	Group 0118	Group 0185	Group 0504	Group 0513
				
Group 0161	Group 0204	Group 0505	Group 0136	Group 0515
				
Group 0511	Group 0506	Group 0135	Group 0509	
				

















Co-extruded plastic profiles

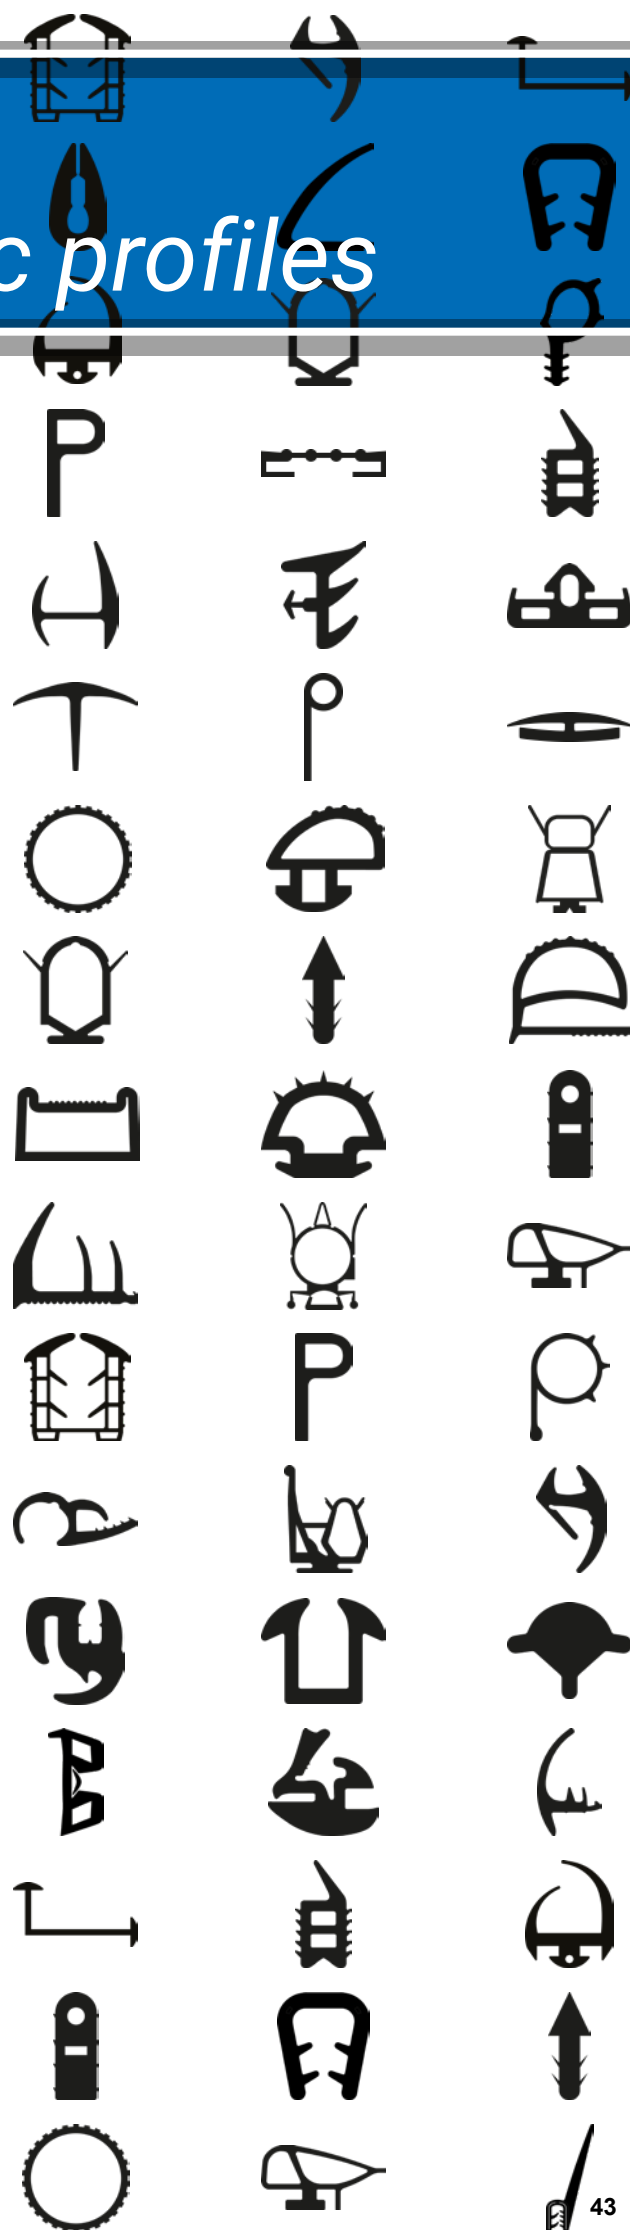Co-extruded plastic profiles are used as door sealing trims. The profiles consist of two parts. One part is hard and is mounted on the sandwich-part and the other part (the lips) are soft. This gives an optimal seal.









50.083013  Material: PVC co-ex profile, 13 mm, black / white lips Length: 5 m 4 bløde læber 4 soft lips Min. order: 1.000 m	50.083015GG ★ / 50.083015GGX  Material: PVC co-ex profile, 15 mm, grey / light grey lips Length: 5 m / 4 m 4 bløde læber 4 soft lips 50.083015GGX: light grey / light grey lips 50.083015GG: Min. order: 2.400 m	50.083030  Material: PVC co-ex profile, 18 mm, white / black lips Length: 5 m 4 bløde læber 4 soft lips	50.083032GG  Material: PVC co-ex profile, 18,4 mm, grey / grey lips Length: 6 m 4 bløde læber 4 soft lips Kan fås i andre farver <i>Available in other colors</i>
50.083033 ★  Material: PVC co-ex profile, 19 mm, light grey / black lips Length: 5 m 4 bløde læber 4 soft lips Min. order: 2.500 m	50.083040GS  Material: PVC co-ex profile, 21 mm, black / grey lips Length: 6 m 4 bløde læber 4 soft lips	50.083040  Material: PVC co-ex profile, 21 mm, black / white lips Length: 5 m 4 bløde læber 4 soft lips Min. order: 200 m	50.083040G  Material: PVC co-ex profile, 21 mm, grey / grey lips Length: 5 m 4 bløde læber 4 soft lips
50.083040GG ★  Material: PVC co-ex profile, 20,8 mm, grey / grey lips Length: 6 m 4 bløde læber 4 soft lips Kan fås i andre farver <i>Available in other colors</i>	50.083045X ★  Material: PVC co-ex profile, 25 mm Length: 5 m 3 bløde læber 3 soft lips Kan fås i andre farver <i>Available in other colors</i> Min. order: 250 m (China)	54.710720 ★  Material: PVC co-ex profile, 25 mm Hardness: Hard/soft Length: 3 m 4 bløde læber 4 soft lips Min. order: 25 m	50.083045G  Material: PVC co-ex profile, 25 mm Length: 6 m 4 bløde læber 4 soft lips Kan fås i andre farver <i>Available in other colors</i>
50.083046  Material: Co-ex profile, 27 mm light grey / light grey lips Length: 5 m 2 bløde læber 2 soft lips	50.083050GG ★  Material: PVC co-ex profile, 30 mm, grey / grey lips Length: 5 m 2 bløde læber 2 soft lips Kan fås i andre farver <i>Available in other colors</i> Min. order: 500 m	50.083050  Material: PVC co-ex profile, 30 mm, black / white lips Length: 5 m 2 bløde læber 2 soft lips	50.083052G ★  Material: PVC co-ex profile, 35 mm, grey / grey lips Length: 3 m 4 bløde læber 4 soft lips Kan fås i andre farver <i>Available in other colors</i> Min. order: 300 m

★ Skaffevare Special order item

50.083055G  Material: PVC co-ex profile, 35 mm, light grey / grey lips Length: 5 m 4 bløde læber 4 soft lips	50.083059  Material: PVC co-ex profile, 40 mm, white / black lips Length: 5 m 2 bløde læber 2 soft lips Min. order: 250 m	50.083060  Material: PVC co-ex profile, 40 mm, white / black lips Length: 5 m 4 bløde læber 4 soft lips Kan fås i andre farver Available in other colors Min. order: 500 m	50.083060G  Material: PVC co-ex profile, 40 mm, light grey / grey lips Length: 5 m 2 bløde læber 2 soft lips
50.083061  Material: PVC co-ex profile, 42 mm, white / black lips Length: 5 m 4 bløde læber 4 soft lips Min. order: 250 m (China)	50.083065  Material: PVC co-ex profile, 45 mm, grey / grey lips Length: 5 m 3 bløde læber 3 soft lips Kan fås i andre farver Available in other colors Min. order: 250 m	50.083065G  Material: Co-ex profile, 45 mm, off white / black lips Length: 5 m	50.083070G  Material: PVC co-ex profile, 55 mm, light grey / grey lips Length: 5 m 4 bløde læber 4 soft lips Min. order: 1.500 m
50.083070GG  Material: PVC co-ex profile, 55 mm, light grey / grey lips Length: 5 m 4 bløde læber 4 soft lips Min. order: 300 m	50.083070B  Material: PVC co-ex profile, 55 mm, white / black lips Length: 5 m 4 bløde læber 4 soft lips Min. order: 500 m	54.710770  Material: PVC co-ex profile, 30 mm, grey Length: 3 m 4 bløde læber 4 soft lips Min. order: 50 m	50.083081  Material: PVC co-ex profile, 65 mm, black 5 bløde læber 5 soft lips
50.083080G  Material: PVC co-ex profile, 65 mm, grey / grey lips Length: 5 m 2 bløde læber 2 soft lips	50.083088  Material: PVC co-ex profile, 81 mm, black / black lips 5 bløde læber 5 soft lips Min. order: 250 m	50.083089  Material: PVC co-ex profile, 81 mm, black / black lips 5 bløde læber 5 soft lips	50.083095BB  Material: PVC, black Length: 5 m Hardness: SH 60 5 bløde læber 5 soft lips

★ Skaffevare Special order item


50.083090  Material: PVC co-ex profile, 83 mm, light grey / light grey lips Length: 5 m 4 bløde læber 4 soft lips	50.083095B *  Material: PVC co-ex profile, 84 mm, white / black lips Length: 5 m 4 bløde læber 4 soft lips Min. order: 500 m	50.083095G *  Material: PVC co-ex profile, 85 mm, white / black lips Length: 5 m 4 bløde læber 4 soft lips Min order: 250 m	54.710780 *  Material: PVC co-ex profile, 85 mm, black / grey lips Hardness: Hard / soft Length: 3 m 4 bløde læber 4 soft lips Min. order: 50 pcs.
50.083000GG  Grå hjørnebånd, blød PVC. I løbende meter. <i>Grey connection part. Soft PVC. In running meters.</i>	50.083000SS  Sort hjørnebånd, blød PVC. I løbende meter. <i>Grey connection part. Soft PVC. In running meters.</i>		















U-profiler

U-profiles
















A U-profile is a pure rubber trim without inserts. It is produced in different sizes, variants and materials such as EPDM, NR, CR, NBR, SBR and silicone rubber.

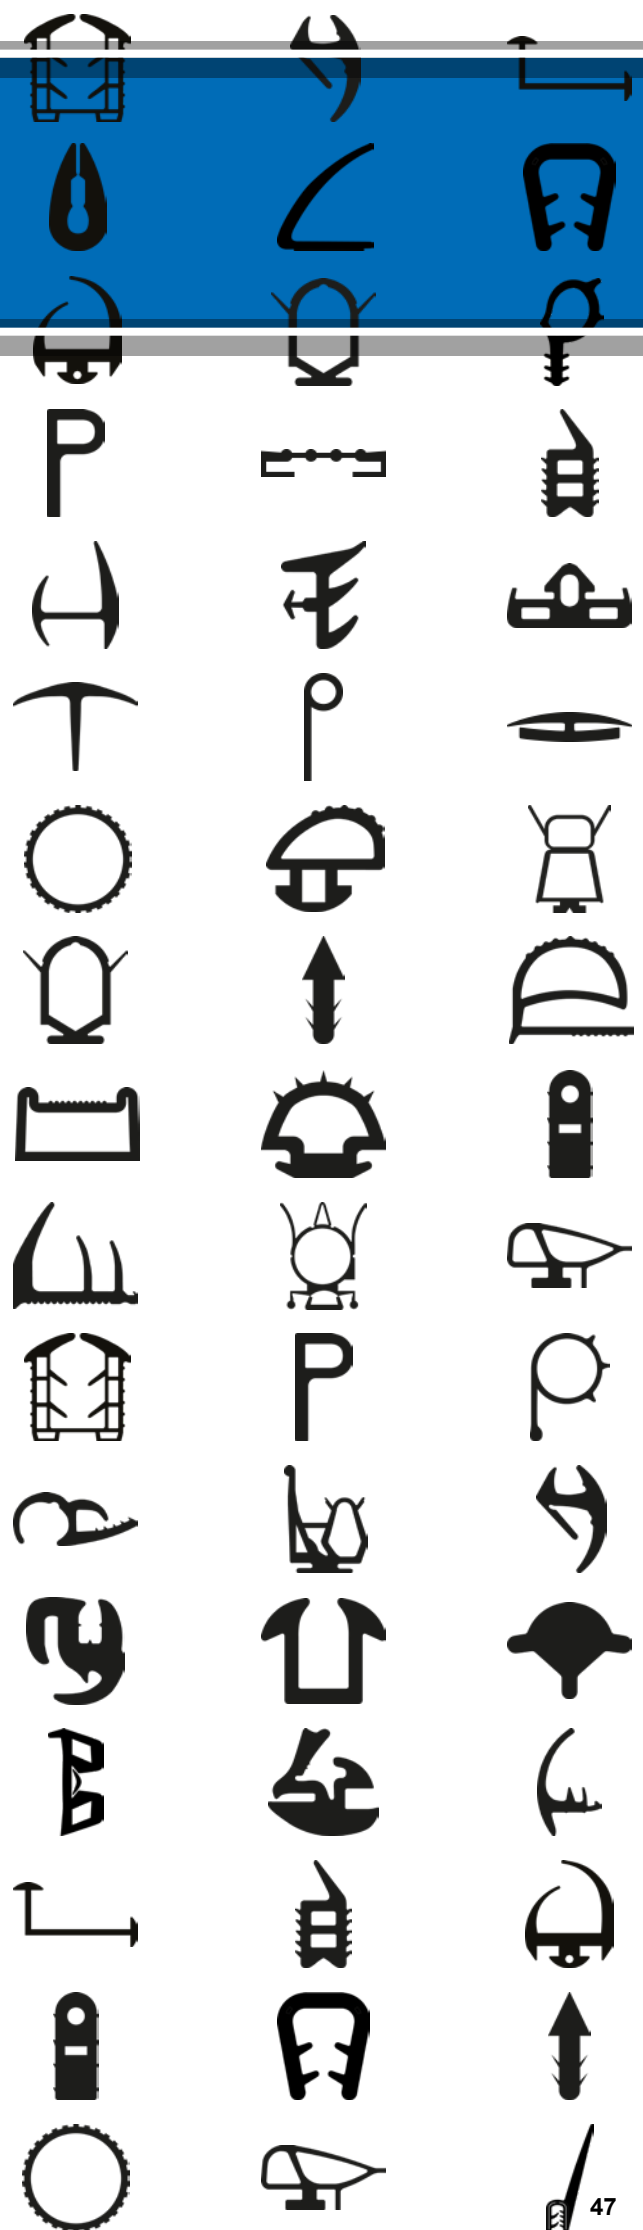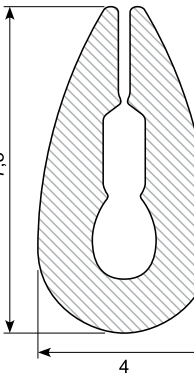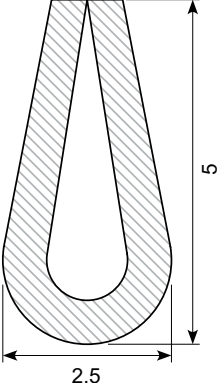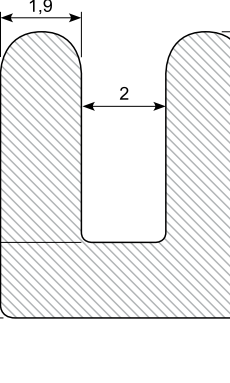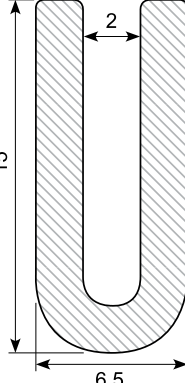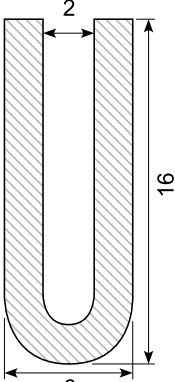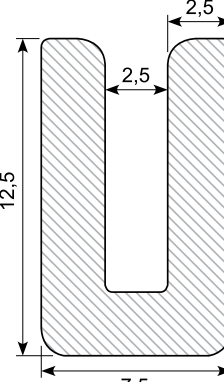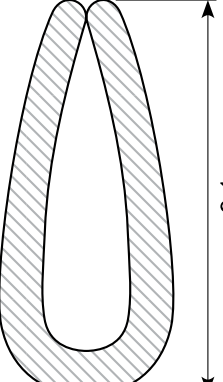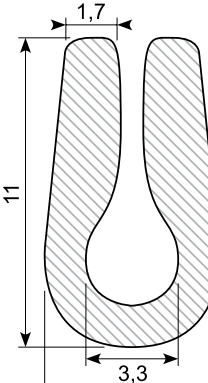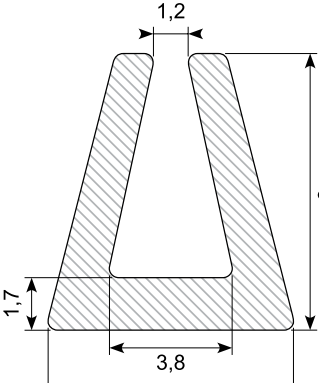U-profiles are excellent for protecting panels, doors, edges and glass and can be used for machines, cars, furniture, etc.



















31.018S *  Material: EPDM, black Hardness: SH 65 Min. order: 4.100 m	31.018X  Material: PVC, black Hardness: SH 65	34.018X  Material: PVC, light grey Hardness: Soft Plate: 1 mm	30.11393  Material: Silicone, grey Hardness: SH 50
34.14334X  Material: Hard PVC, black Plate: 1,5 - 2 mm	31.060S  Material: EPDM, black Hardness: SH 65	31.041S  Material: EPDM, black Hardness: SH 65	31.042S  Material: EPDM, black Hardness: SH 65
30.OT3394 *  Material: Silicone, black Min. order: 100 m	31.047 *  Material: EPDM, black Hardness: SH 65 Min. order: 1.000 m	31.063  Material: EPDM, black Hardness: SH 65	30.9548  Material: PVC hard, light grey Length: 3,9 m
31.025S *  Material: EPDM, black Hardness: SH 65 Min. order: 600 m	31.021S  Material: EPDM, black Hardness: SH 65	31.022S  Material: EPDM, black Hardness: SH 65	34.031X  Material: PVC, transparent Hardness: Soft


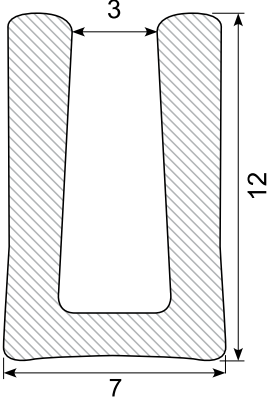
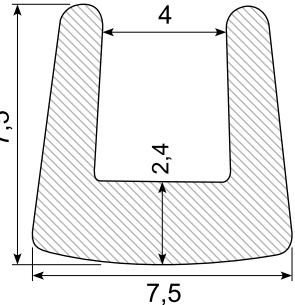
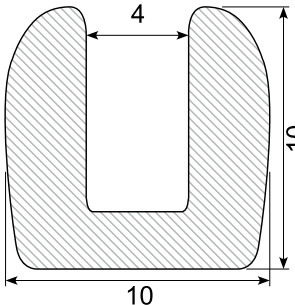
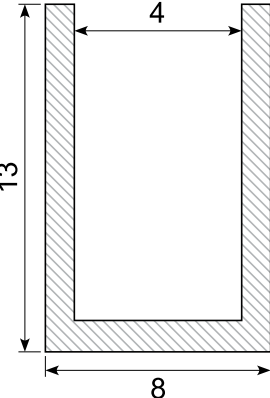
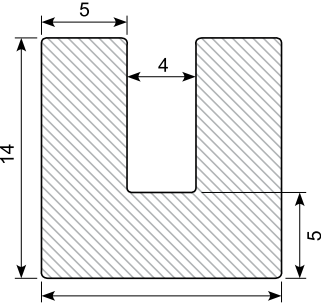
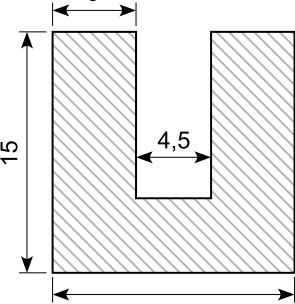
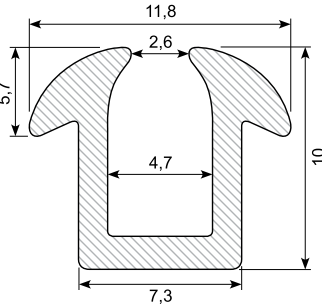
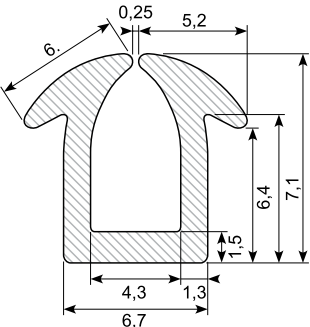
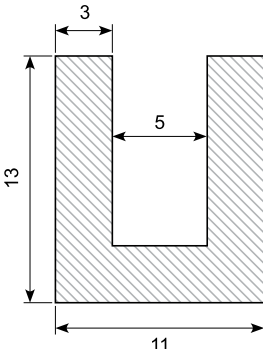
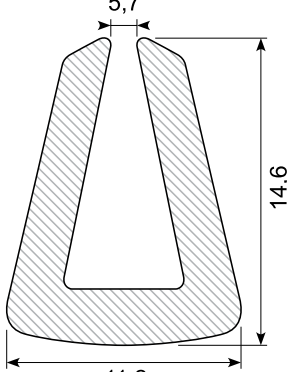
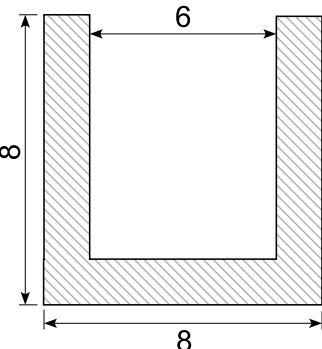
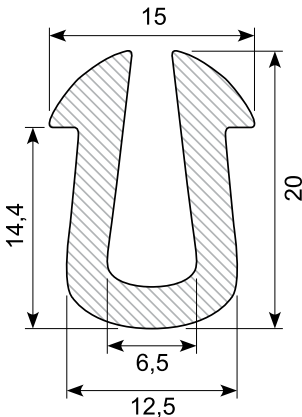
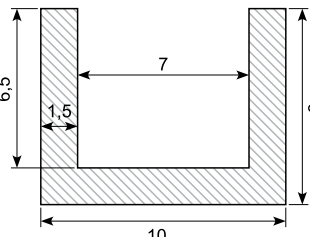
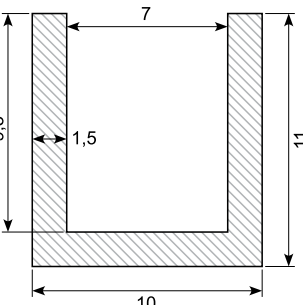
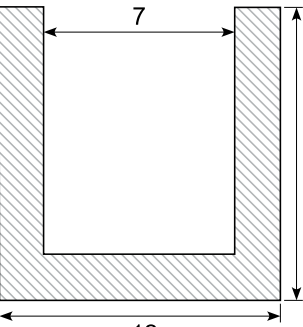
* Skaffevare Special order item

30.13086  Material: EPDM, black Hardness: SH 80	31.043S  Material: EPDM, black Hardness: SH 65	31.064  Material: EPDM, black Hardness: Hard	31.065S  Material: EPDM, black Hardness: SH 65
31.061S  Material: EPDM, black Hardness: SH 65	30.6622N  Material: NBR, black Hardness: SH 65 Oliebestendig <i>Oil resistant</i>	30.6622 *  Material: EPDM, black Hardness: SH 65 Min. order: 500 m	31.216ST  Material: EPDM, black Hardness: SH 65
31.216GS  Material: Silicone, light grey <i>Ral 7040</i> Hardness: SH 70	30.11459 *  Material: Transparent silicone Hardness: SH 45 Min. order: 250 m	34.035  Material: PVC, transparent Hardness: Hard	31.066  Material: Silicone, black Hardness: SH 70
30.6724  Material: EPDM, black Hardness: SH 65	30.14507-1 *  Material: EPDM, black Min. order: 3.000 m	30.14507-2 *  Material: EPDM, black Min. order: 3.000 m	31.068S  Material: EPDM, black Hardness: SH 65

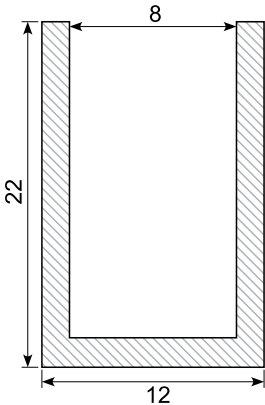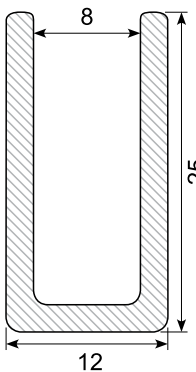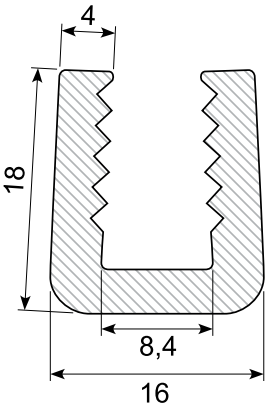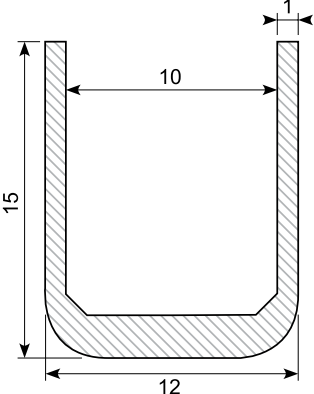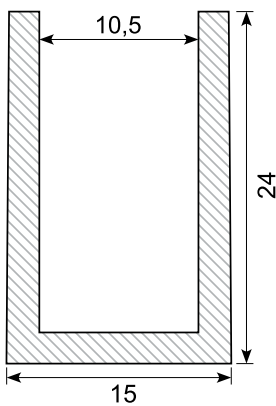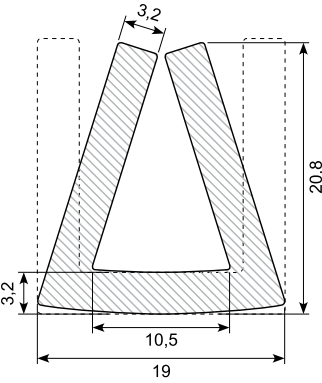
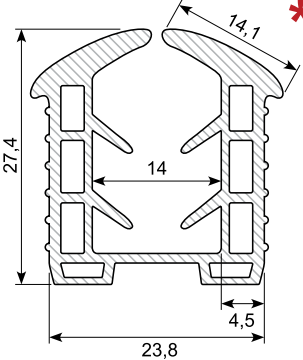


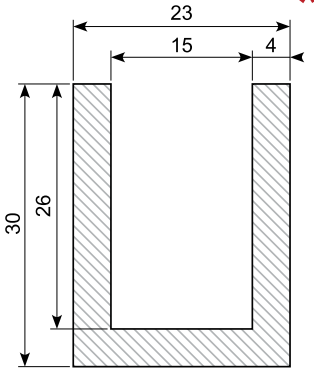

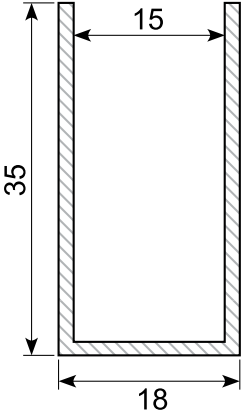
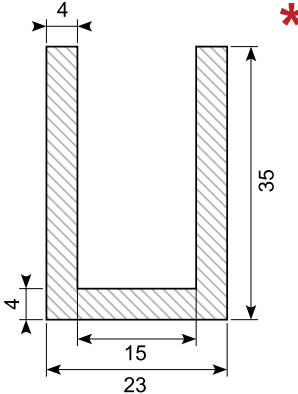
* Skafevare Special order item

30.1386  Material: EPDM, black Hardness: SH 65	30.OT3440 *  Material: Silicone, black Hardness: SH 60 Min. order: 100 m	30.12896  Material: EPDM, black Hardness: SH 65	31.074S *  Material: EPDM, black Min. order: 1.000 m
30.7987  Material: EPDM, black Hardness: SH 65	30.OT0136 *  Material: Silicone, white Min. order: 100 m	31.070S  Material: EPDM, black Hardness: SH 50	31.071S  Material: EPDM, black Hardness: SH 65
30.2455  Material: PVC, black Length: 3.111 mm	30.11774 *  Material: EPDM Hardness: SH 65 10-13 mm glass Min. order: 1.000 m	30.7508 *  Material: EPDM, black Hardness: SH 65 Min. order: 400 m	30.9519 *  Material: PVC soft, black Min. order: 7.000 m
30.12932-1 *  Material: EPDM, black Hardness: SH 60 Min. order: 500 m	30.13535 *  Material: EPDM, black Hardness: SH 60 Min. order: 420 m	30.7509  Material: EPDM, black Hardness: SH 65	30.10777-1 *  Material: TPE, black Hardness: SH 60 Min. order: 100 m

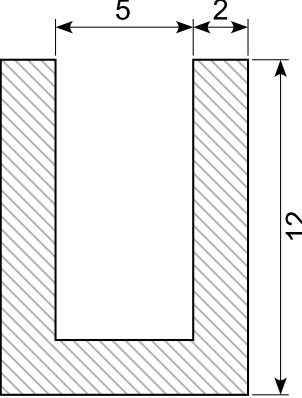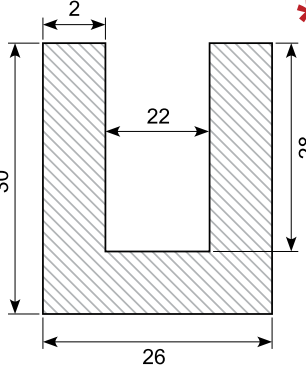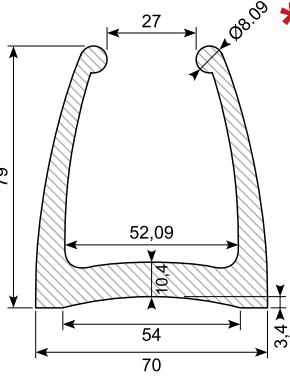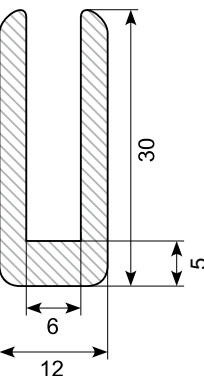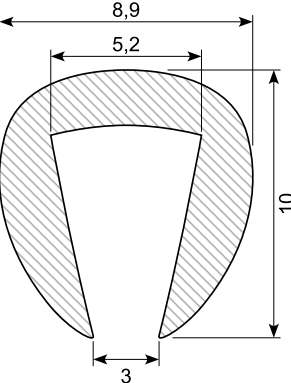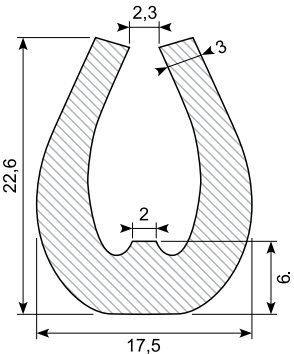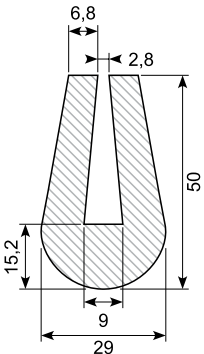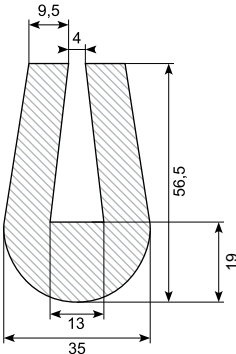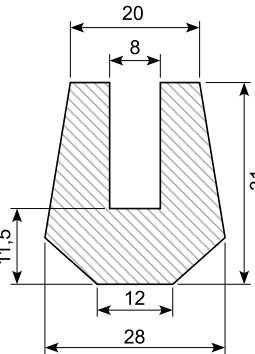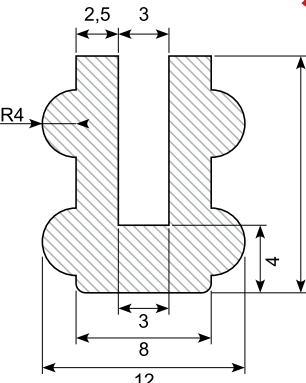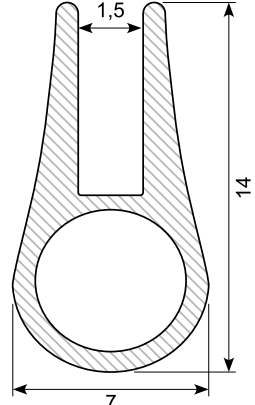* Skaffevare Special order item

30.21101205  Material: EPDM Hardness: SH 70	30.14507-3 *  Material: EPDM Min. order: 2.000 m	31.050 *  Material: EPDM, black Hardness: SH 65 Min. order: 500 m	30.14356 *  Material: TPE, black Hardness: SH 60 Min. order: 50 - 100 m
31.048 *  Material: EPDM, black Hardness: SH 65 Min. order: 250 m	30.11911 *  Material: EPDM Hardness: SH 65 Min. order: 300 m	30.2984-5  U-profile Material: EPDM Hardness: SH 70	34.117/6  Material: Plastic, metal grey
30.2984-6  U-profile Material: EPDM Hardness: SH 80 Rulle med Roll of 50 m	30.2984-1  U-profile Material: EPDM Hardness: SH 70 Rulle med Roll of 25 m	30.2984-2  U-profile Material: EPDM Hardness: SH 65 Rulle med Roll of 25 m	30.2984-3  U-profile Material: EPDM Hardness: SH 70 Rulle med Roll of 25 m
30.7519NBR *  Material: NBR, grey Hardness: SH 65 Length: 3 m Oliebestandig Oil resistant Min. order: 500 m	30.7519 *  Material: EPDM, black Hardness: SH 65 Length: 50 m coils Min. order: 50 - 250 m	30.14227 *  Material: Silicone, transparent Min. order: 100 m	31.037SI  Material: Silicone, black

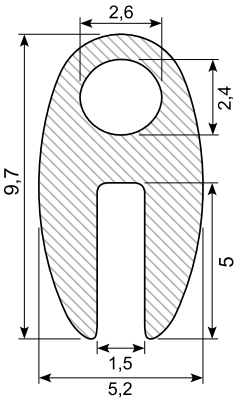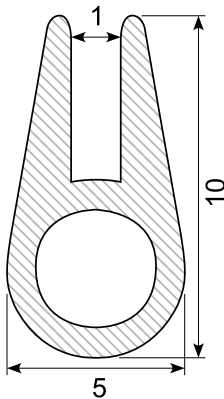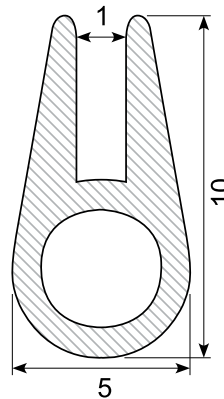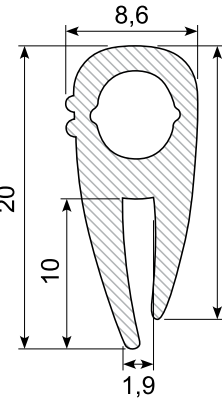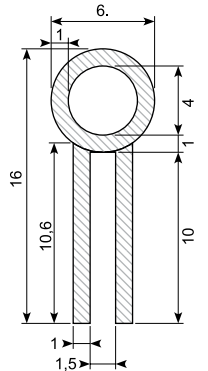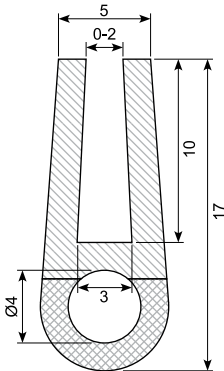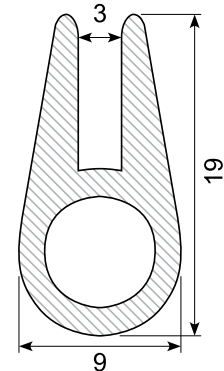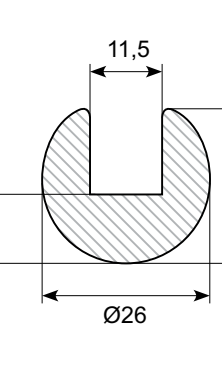
* Skaffevare Special order item















31.035S  Material: EPDM, black Hardness: SH 65	31.036SI *  Material: Silicone, black Min. order: 200 m	31.036SI-LTC  Material: Silicone, black UL94 godkendt approved	30.9884X *  Material: EPDM Min. order: 3.000 m
31.037 *  Material: EPDM Hardness: SH 56 - 60 Min. order: 2.000 m	30.9885  Material: EPDM Hardness: SH 60	31.038SI  Material: Silicone, black Hardness: SH 60	30.211.04.385 *  Material: EPDM Hardness: SH 70 Min. order: 50 m

P-profiles













P-profiles are generally used for sealing cracks on e.g. doors, windows or machines.

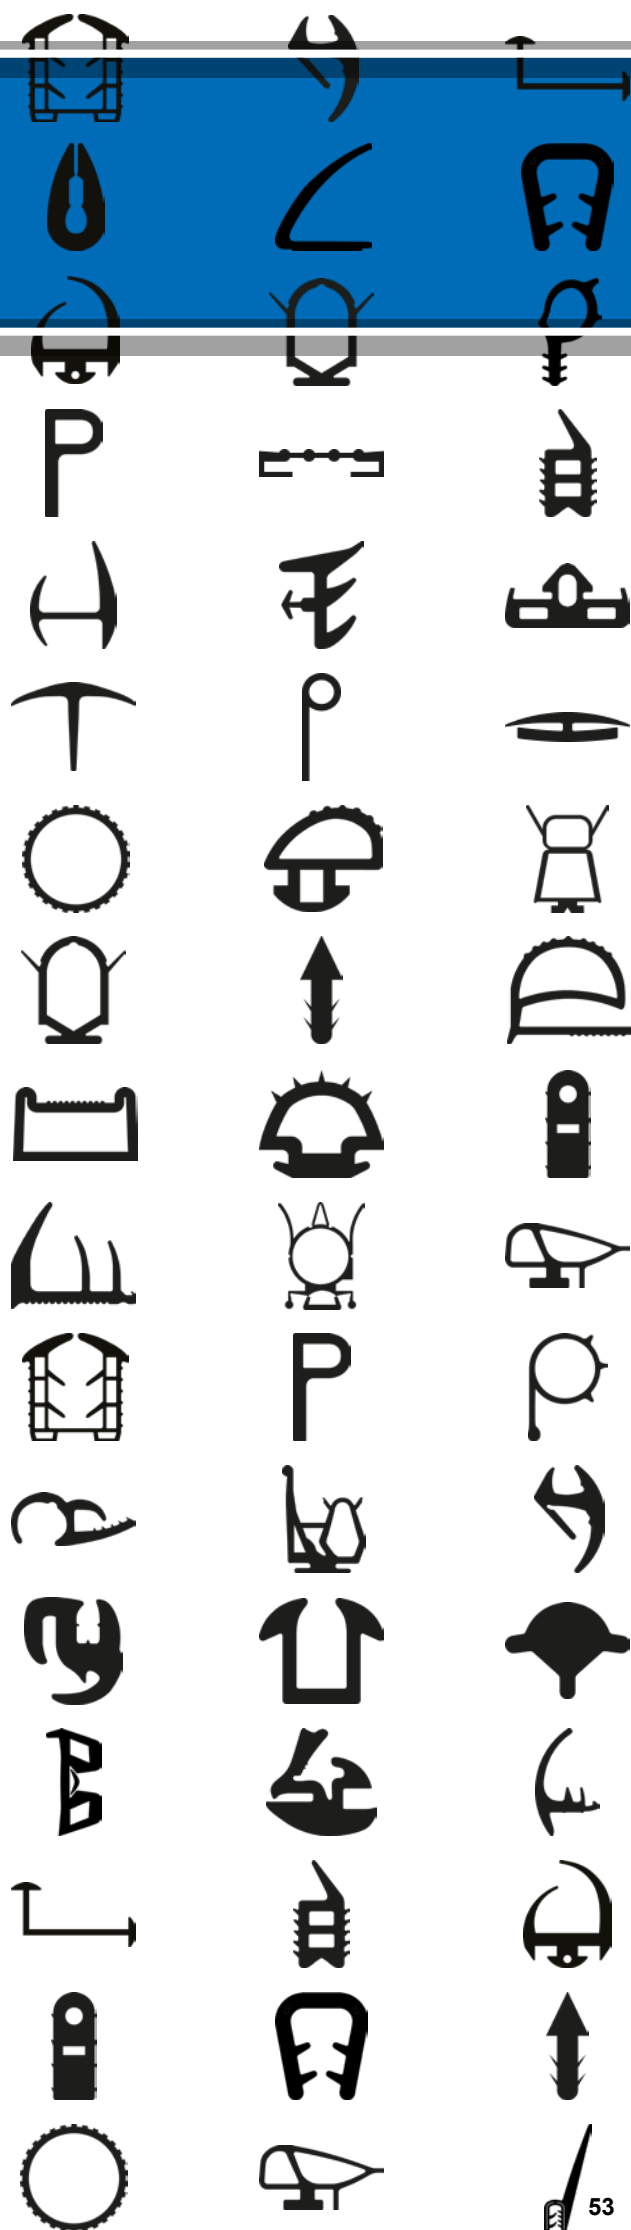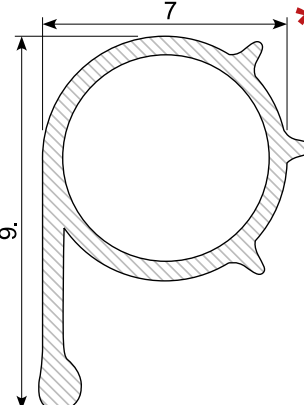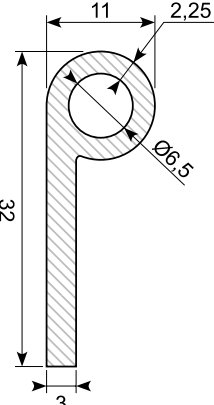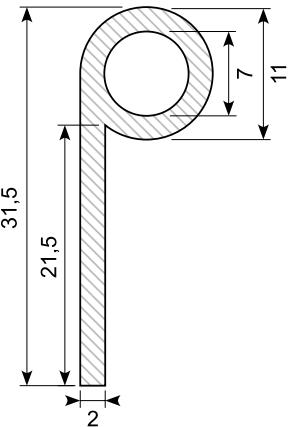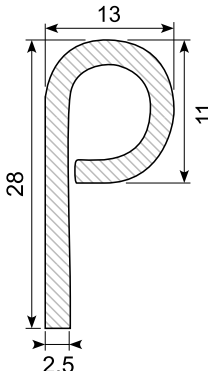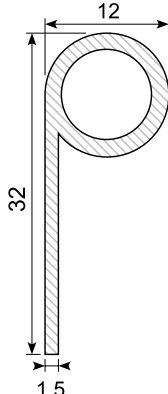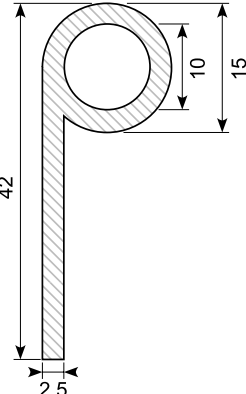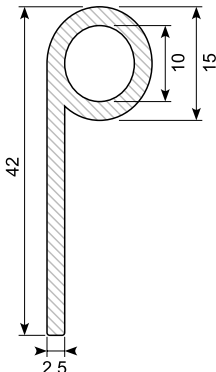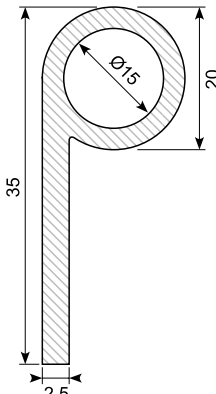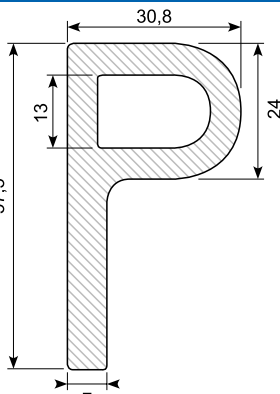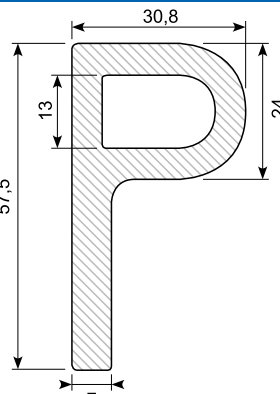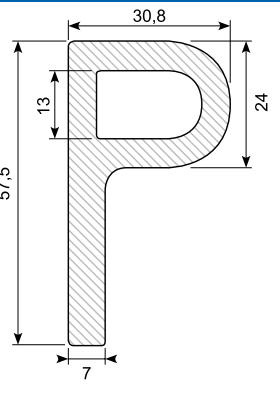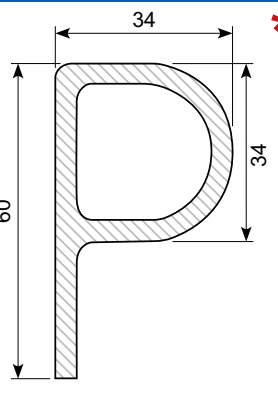Depending on the selected hardness you can attach the profile in different ways. The choice of material depends on the environment.



30.22381  Material: CR, black Hardness: SH 70 Betinget oliebestandig <i>Conditional oil resistant</i>	30.OT101  Material: Silicone, brown Min. order: 100 m	30.182  Material: Silicone, FDA conform, grey RAL 7040 Hardness: SH 60 Max. 180 °C	30.13708  Material: Silicone, white Hardness: SH 45
30.7408X  Material: EPDM, black	30.148S  Material: EPDM, black Hardness: SH 65 Min. order: 450 m	30.OT2036  Material: Silicone, black Max. 270 °C	30.138S  Material: EPDM, black Hardness: SH 65
30.138NBR  Material: NBR Oliebestandig Oil resistant Min. order: 100 m	30.140  Material: SEBS, black Hardness: SH 60		
30.136  Material: EPDM, black Hardness: SH 65	30.136/45  Material: EPDM, black Hardness: SH 45, soft	30.136NBR  Material: NBR, black Hardness: SH 65 Oliebestandig Oil resistant	30.OT1057  Material: Silicone, white Max. 270 °C Min. order: 50 m

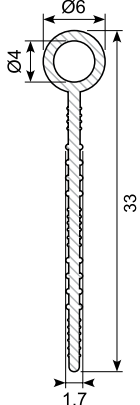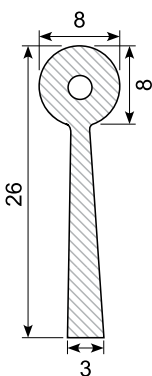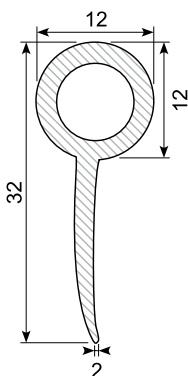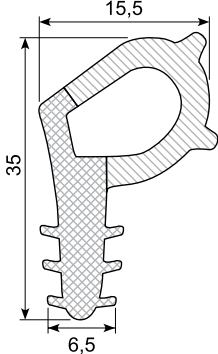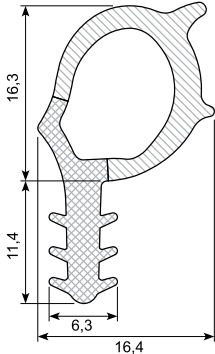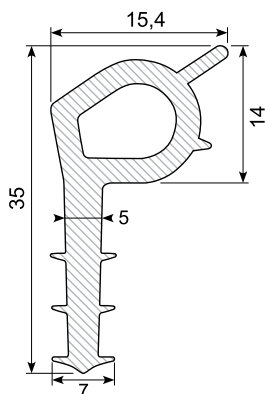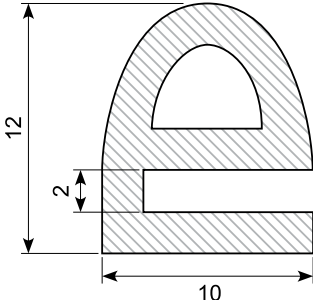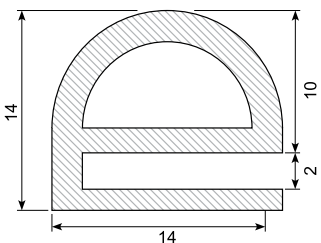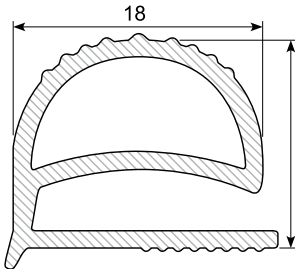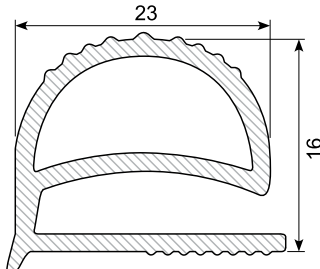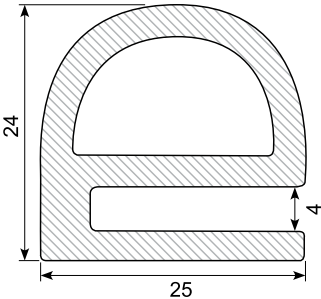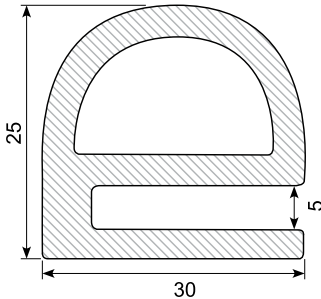* Skaffevare Special order item

52.269X  Material: PVC, black Hardness: Medium	30.176 *  Material: EPDM, black Hardness: SH 65 Min. order: 1.000 m	30.180  Material: EPDM, black Hardness: SH 65	
30.8538 *  Material: EPDM co-ex Hardness: SH 70 Density: 0,65 Min. order: 2.000 m	30.8538B *  Material: EPDM co-ex Hardness: SH 65 Density: 0,5 Min. order: 2.000 m	30.OT3271 *  Material: Silicone, light grey Min. order: 1.000 m	
30.OT1080  Material: Silicone, white Hardness: SH 60	30.OT1081  Material: Silicone, white	30.6487 *  Material: PVC, grey Length: 3 m Min. order: 1.000 m	30.SM251 *  Material: TPE / EPDM, grey Hardness: SH 65 Length: 25 m Min. order: 200 m
30.OT3334  Material: Silicone, white	31.OT2179 *  Material: Silicone, white Min. order: 100 m		

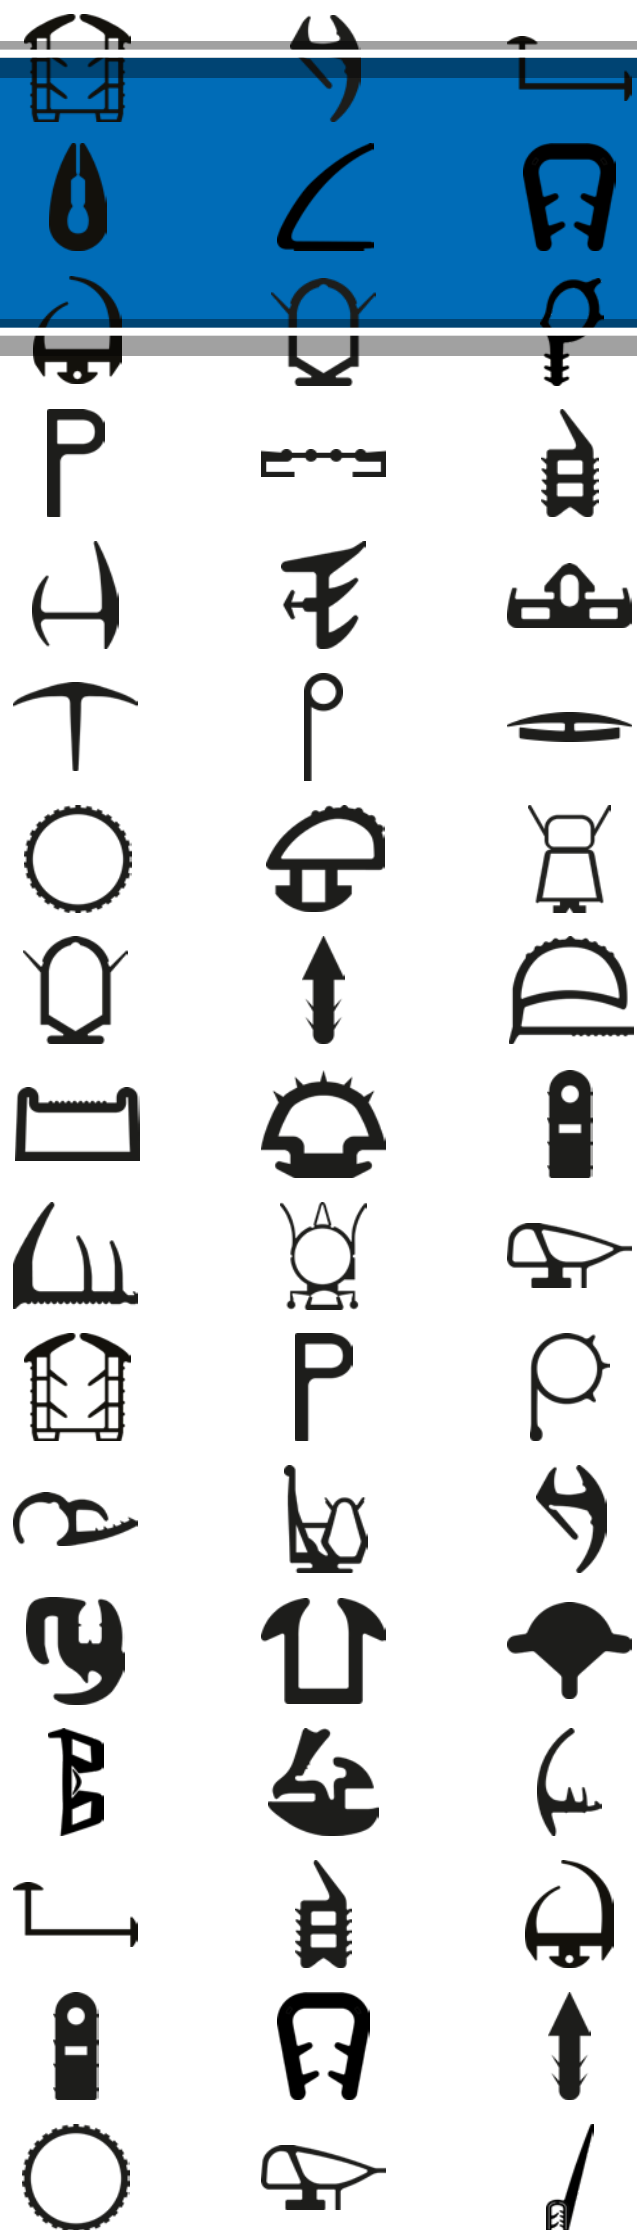
Glazing sections

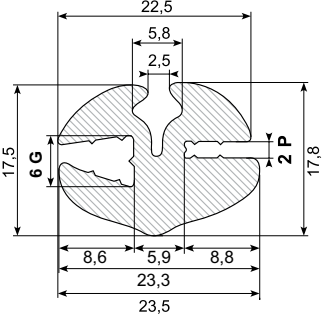
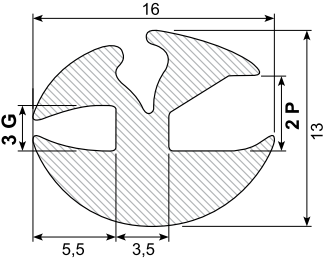
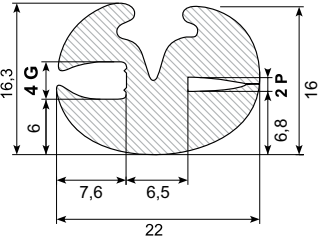
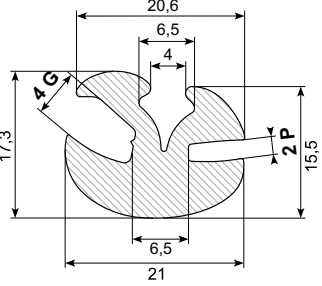
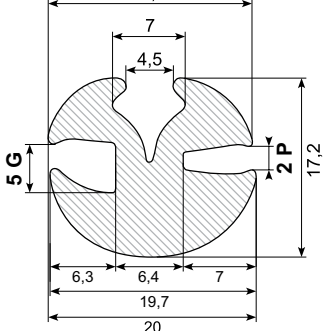
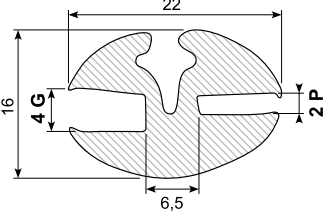
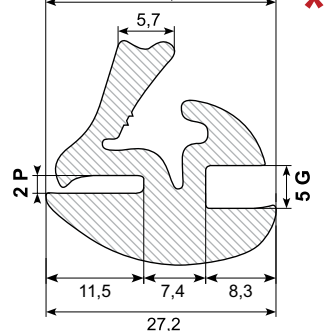
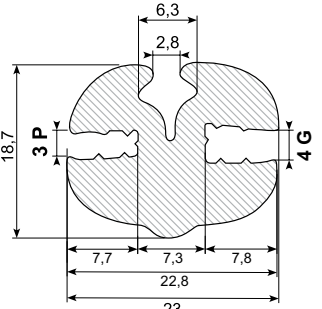
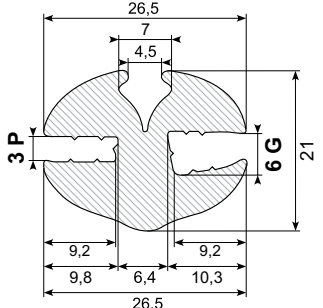
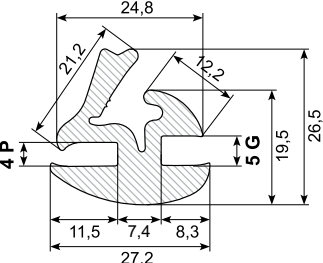
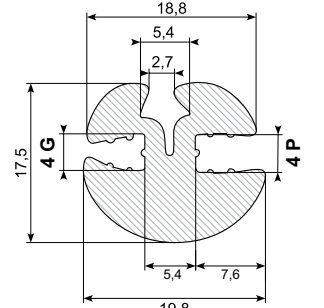
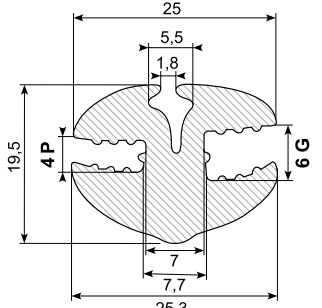
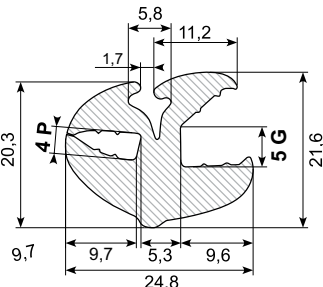
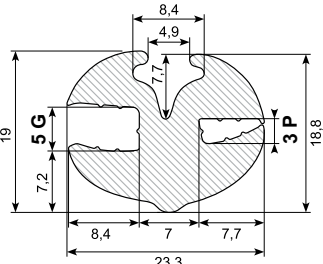
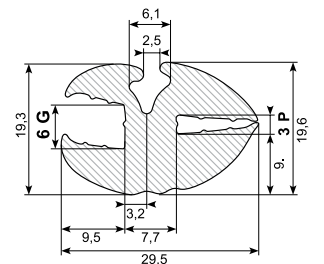
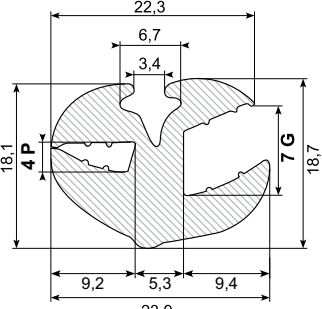
Glazing sections ensure that the glass is fixed in the frame and protect it from shocks and movement.

Glazing sections are used for windows in cars, boats, buses, machinery, caravans and buildings.

















Remember that for several glazing sections you need to use a filler strip, which you can find in the next chapter "Filler strips".

If you need a glazing section with a slightly different size, we will be happy to assist you to find a solution.



32.016S  Material: EPDM, black Hardness: SH 65 Min. radius: 90 mm	32.924  Material: EPDM, black Hardness: SH 60 Min. radius: 30 mm Husk special låsekile <i>Remember special filler strip:</i> 32.924K	32.2024CR *  Material: CR, black Hardness: SH 65 Min. radius: 80 mm Oliebestandig Oil resistant Min. order: 200 m	32.1024S  Material: EPDM, black Hardness: SH 65 Min. radius: 80 mm
32.1025S  Material: EPDM, black Hardness: SH 65 Min. radius: 80 mm	32.2024M  Material: EPDM, black Hardness: SH 65 Min. radius: 80 mm	32.1025SK *  Material: EPDM, black Hardness: SH 65 Min. radius: 80 mm Inkl. kile Incl. wedge	32.034S  Material: EPDM, black Hardness: SH 65 Min. radius: 90 mm
32.036S  Material: EPDM, black Hardness: SH 65 Min. radius: 75 mm	32.1045SK *  Material: EPDM, black Hardness: SH 65 Min. radius: 80 mm Inkl. kile Incl. wedge Min. order: 100 m	32.044S  Material: EPDM, black Hardness: SH 65 Min. radius: 75 mm	32.046S  Material: EPDM, black Hardness: SH 65 Min. radius: 90 mm
32.2045M  Material: EPDM, black Hardness: SH 65 Min. radius: 90 mm	30.8439  Material: EPDM Hardness: SH 65	32.036X  Material: EPDM Hardness: SH 65	32.047  Material: EPDM, black Hardness: SH 65 Min. radius: 90 mm

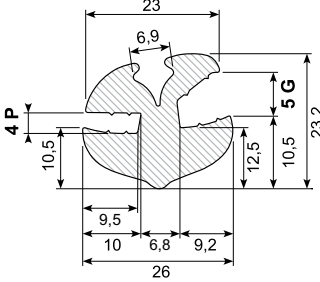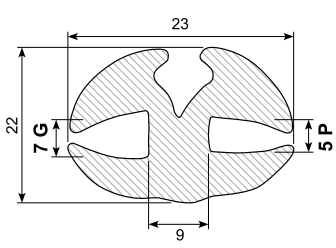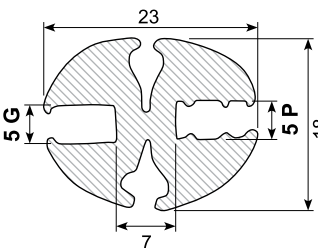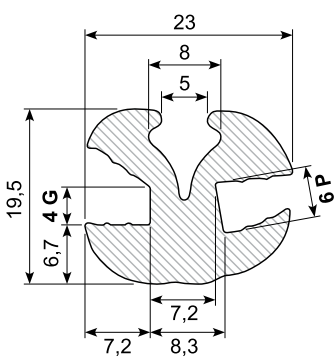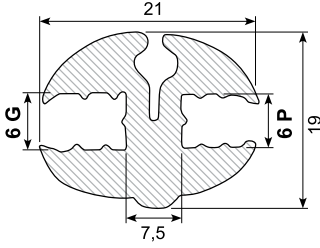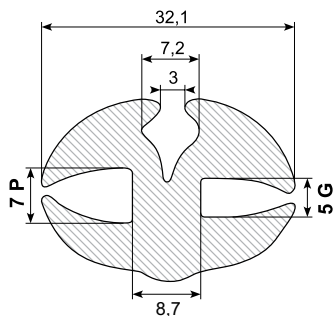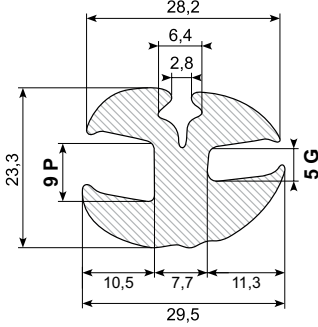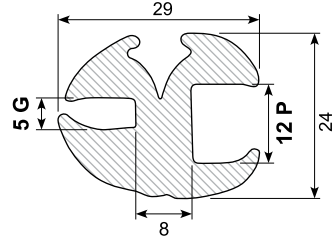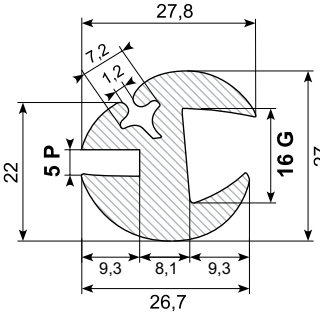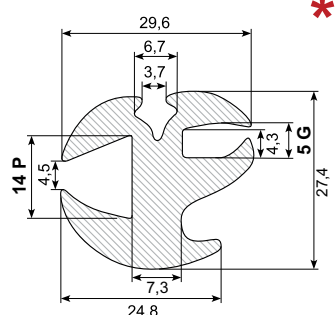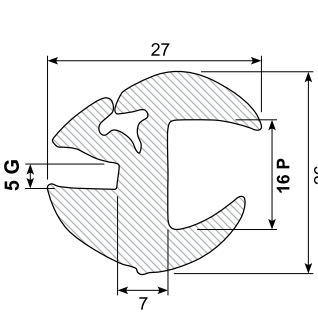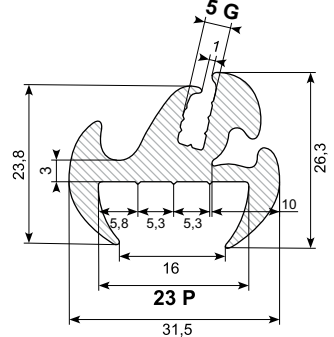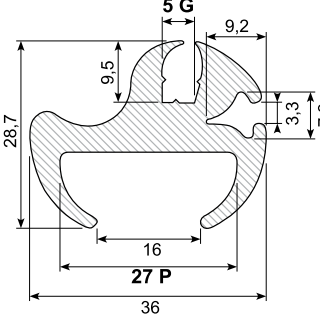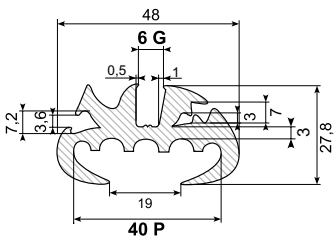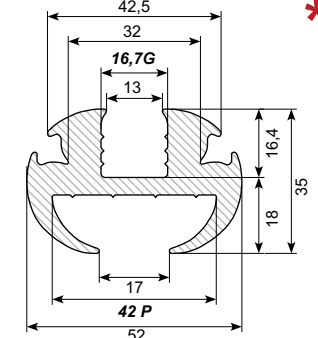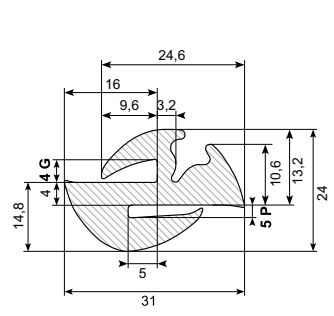* Skaffevare Special order item

32.1045S  Material: EPDM, black Hardness: SH 65 Min. radius: 90 mm	32.057 *  Material: EPDM, black Hardness: SH 65 Min. radius: 100 mm Min. order: 300 m	32.255S  Material: EPDM, black Hardness: SH 65 Min. radius: 100 mm	32.064S  Material: EPDM, black Hardness: SH 70
32.066  Material: EPDM, black Hardness: SH 65 Min. radius: 80 mm	32.075  Material: EPDM, black Hardness: SH 65 Min. radius: 100 mm	32.095S  Material: EPDM, black Hardness: SH 65 Min. radius: 115 mm	32.512  Material: EPDM, black Hardness: SH 65 Min. radius: 115 mm
32.165  Material: EPDM, black Hardness: SH 65 Min. radius: 120 mm	32.514S *  Material: EPDM, black Hardness: SH 65 Min. radius: 110 mm Min. order: 300 m	32.516S  Material: EPDM, black Hardness: SH 65 Min. radius: 120 mm	32.523S  Material: EPDM, black Hardness: SH 65 Min. radius: 110 mm
32.527  Material: EPDM, black Hardness: SH 65 Min. radius: 120 mm	32.1037S  Husk låsekiler Remember filler strips  32.1307S  32.309X Material: EPDM, black Hardness: SH 65 Min. radius: 120 mm	32.1640 *  Material: EPDM, black Hardness: SH 65 Min. radius: 120 mm Min. order: 50 m	32.754S  Material: EPDM, black Hardness: SH 65 Min. radius: 100 mm Sikkerhedsgummi Safety rubber


32.866 * Material: EPDM, black Hardness: SH 65 Min. radius: 120 mm Sikkerhedsgummi <i>Safety rubber</i> Min. order: 250 m	32.795S * Material: EPDM, black Hardness: SH 65 Min. radius: 100 mm Sikkerhedsgummi <i>Safety rubber</i> Min. order: 50 m	32.7125 * Material: EPDM, black Hardness: SH 65 Min. radius: 120 mm Sikkerhedsgummi <i>Safety rubber</i> Min. order: 250 m	32.7195S Material: EPDM, black Hardness: SH 65 Min. radius: 120 mm Sikkerhedsgummi <i>Safety rubber</i>
31.365 * Material: EPDM, black Hardness: SH 65 Min. order: 1.000 m	31.116S Material: EPDM, black Hardness: SH 65	31.112S Material: EPDM, black Hardness: SH 65	31.145S Material: EPDM, black Hardness: SH 65
31.148 Material: EPDM, black Hardness: SH 65	31.155 Material: EPDM, black Hardness: SH 65	31.6701 * Material: EPDM, black Hardness: SH 65	31.6703 * Material: EPDM, black Hardness: SH 65
31.6702 * Material: EPDM, black Hardness: SH 65 Min. order: 500 m	32.1307S Material: EPDM, black Hardness: SH 65		








* Skaffevare Special order item

Filler strips

Filler strips are used as a fastening together with glazing sections. Once a glazing section is in place, it is fastened in place with a filler strip to ensure a tight fit around the window.

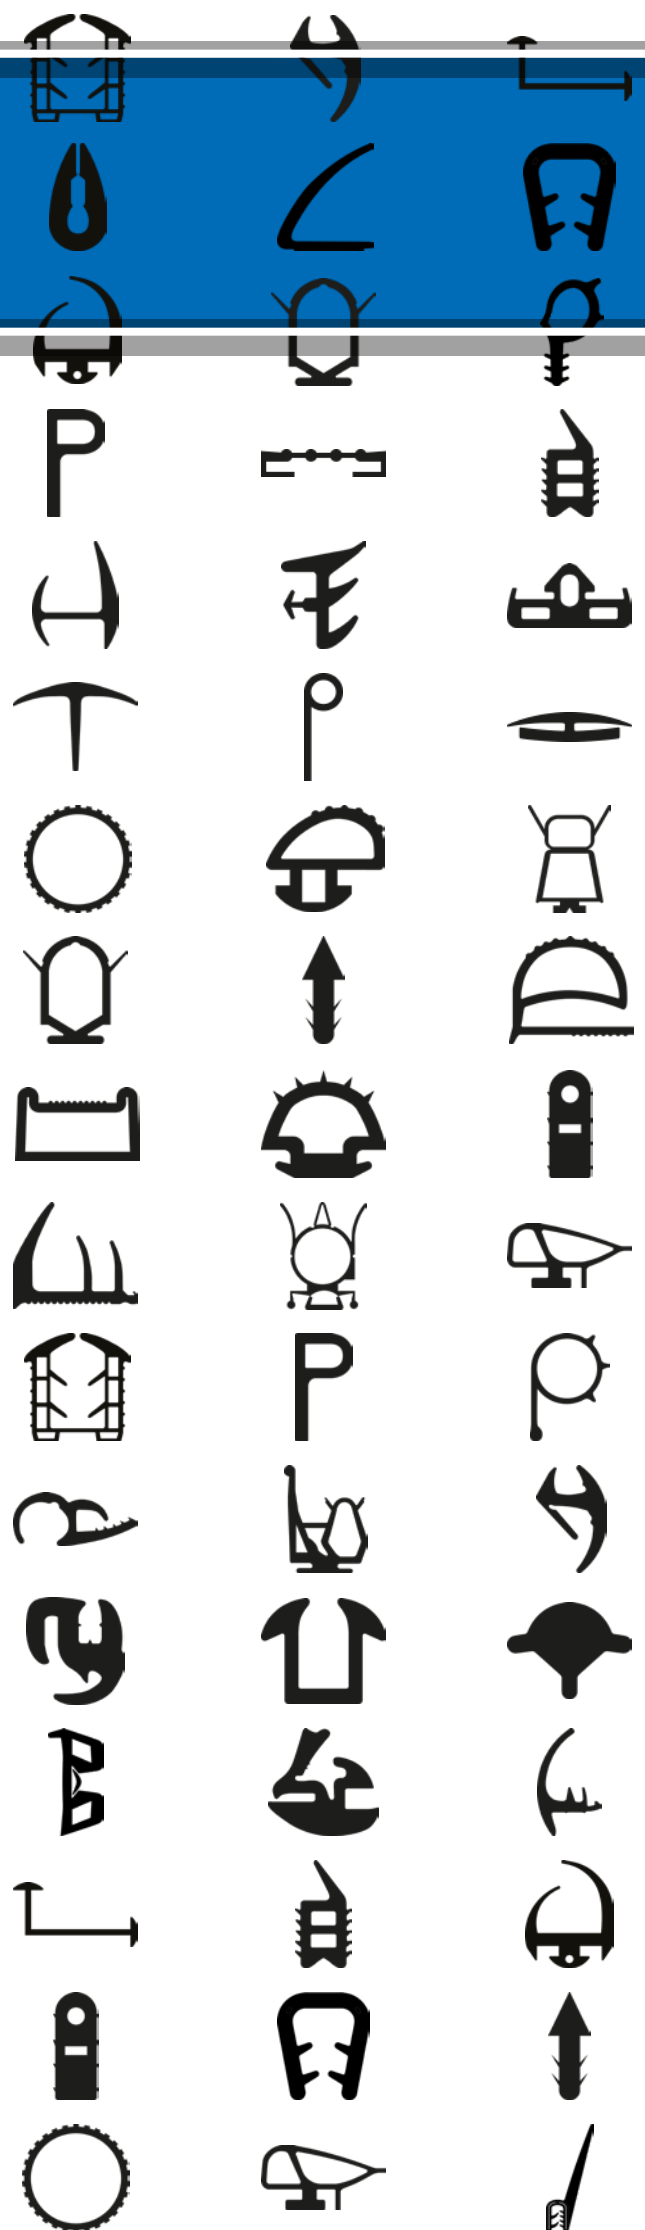The filler strips are available in countless colors and can give a whole new look to a machine or car. The filler strip does not have just a functional significance, but also an aesthetic.




32.309X  Material: PVC, black	32.301X  Material: PVC, dark grey	32.300X  Material: PVC, white	32.1301  Material: PVC, chrome
32.409X  Material: PVC, black	32.009S  Material: EPDM, black Hardness: SH 65	32.924K  Material: EPDM, black For 32.924	

Sponge rubber


Sponge rubber is a foamed and soft type of rubber with a open structure and great elasticity, making the material optimal for sealing or caulking.

Do you need a sealer with high UV- or temperature resistance? Or perhaps for sealing and caulking applications in industry? The sealing properties of sponge rubber are useful in a variety of industries.

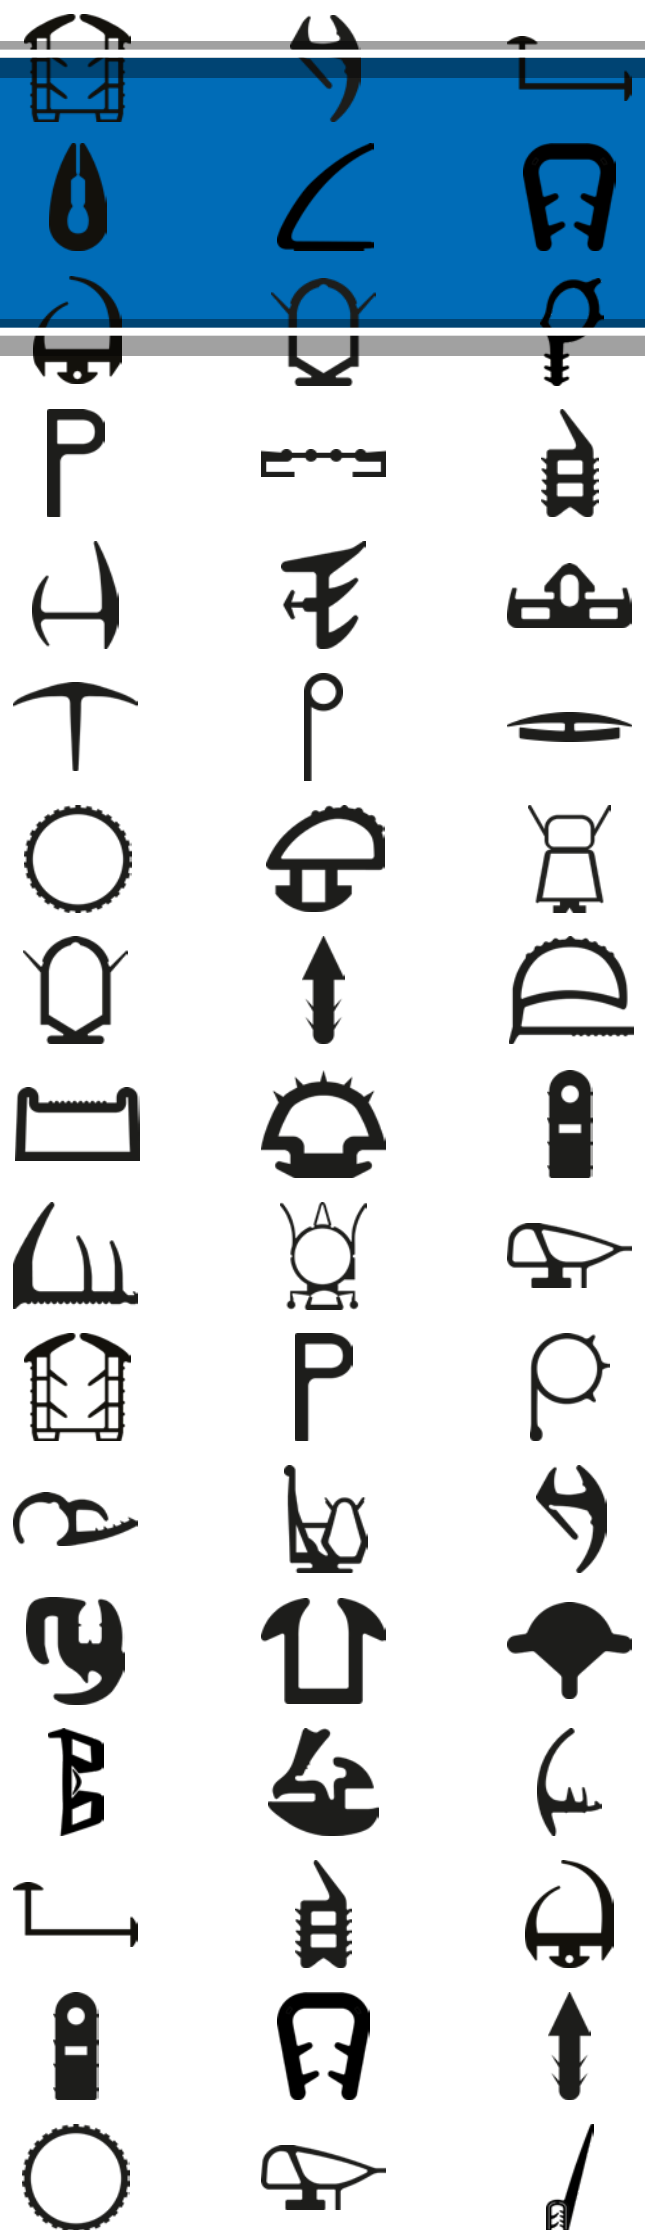For example, the sealing properties of this type of rubber can be used around ventilation and air conditioning systems, as well as for cutting dies, lamps, body panels, steel cabinets and steel doors. Sponge rubber is available with different types of adhesive and rubber.



Svampegummisnor *Sponge rubber cord*

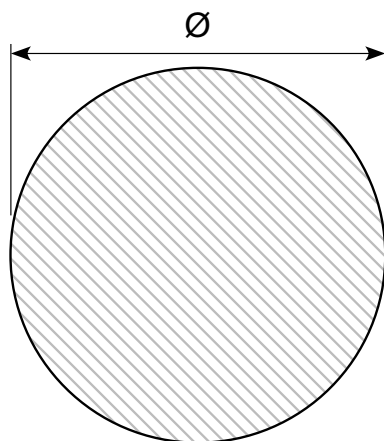

Material: EPDM, mørkegrå *dark grey*

Hardness: SH 16 - 20

Density: 0,4 - 0,5

Varenr. <i>Item no.</i>	Ø
36.102E	2 mm
36.1025E *	2,5 mm
36.103E	3 mm
36.1035E *	3,5 mm
36.1045E *	4,5 mm
36.105E *	5 mm
36.106E	6 mm
36.106EG * lysegrå <i>light grey</i>	6 mm
36.106ESP *	6 mm
36.107E	7 mm
36.108E *	8 mm
36.108EG * lysegrå <i>light grey</i>	8 mm
36.109E *	9 mm
36.110E *	10 mm
36.111E *	
36.112E *	12 mm
36.112EG lysegrå <i>light grey</i>	12 mm
36.117E	17 mm
36.118E *	18 mm
36.120E	20 mm
36.122E *	22 mm
36.125E	25 mm
36.130EX *	30 mm
36.135E *	35 mm

Material: CR, mørkegrå *dark grey*

Hardness: SH 16 - 22

Density: 0,4 - 0,6

Varenr. <i>Item no.</i>	Ø
36.103CR	3 mm
36.104CR	4 mm
36.105CR	5 mm
36.106CR	6 mm
36.107CR *	7 mm
36.108CR	8 mm
36.110CR	10 mm
36.112CR	12 mm
36.115CR sort <i>black</i>	15 mm
36.118CR * sort <i>black</i>	18 mm
36.119CR *	19 mm
36.120CR *	20 mm
36.122CR	22 mm

Material: EPDM, sort *black*

Hardness: SH 16 - 20

Density: 0,45 - 0,6

Varenr. <i>Item no.</i>	Ø	Min. order
36.7004.5X *	4,5 mm	3.000 m
36.7005X *	5 mm	3.000 m
36.7006X *	6 mm	3.000 m
36.7007X *	7 mm	3.000 m
36.7008X *	8 mm	3.000 m
36.7008.5X *	8,5 mm	3.000 m
36.7009X *	9 mm	3.000 m
36.7010X *	10 mm	3.000 m
36.7010.5X *	10,5 mm	3.000 m
36.7011X *	11 mm	3.000 m
36.7011.5X *	11,5 mm	3.000 m
36.7012X *	12 mm	3.000 m
36.7014X *	14 mm	3.000 m
36.7018X *	18 mm	
36.7028X *	28 mm	
36.7064X *	64 mm	

Material: EPDM, sort *black*


Hardness: SH 16 - 20

Density: 0,45 - 0,6

Varenr. <i>Item no.</i>	Ø
36.7003 *	3 mm
36.7004	4 mm
36.7005	5 mm
36.7006 *	6 mm
36.7008	8 mm
36.7009	9 mm
36.7010	10 mm
36.7012	12 mm
36.7015	15 mm
36.7050 *	50 mm


Svampegummislange *Sponge rubber hose*

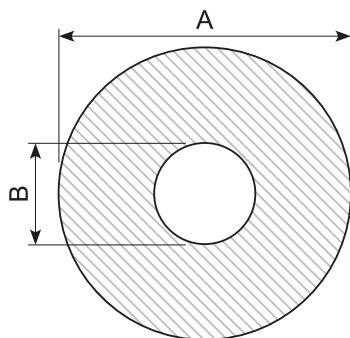Material: EPDM, sort *black*



Varenr. <i>Item no.</i>	A x B	Min. order
36.34155105 *	15,5 x 10,5 mm	
36.3416068 *	16 x 6,8 mm	
36.342026 *	26 x 20 mm	1.000 m
36.342226 *	26 x 22 mm	1.000 m
36.342529 *	29 x 25 mm	1.000 m
36.342030 *	30 x 20 mm	550 m
36.342232 *	32 x 22 mm	500 m
36.342433 *	33 x 24 mm	500 m
36.341840 *	40 x 18 mm	200 m
36.342840 *	40 x 28 mm	250 m
36.344511 *	45 x 11 mm	

Svampegummi, halvrund *Sponge rubber, half round*



Material: EPDM

Varenr. <i>Item no.</i>	A x B	Farve <i>Color</i>
36.198	6 x 8 mm	Grå <i>Grey</i>
36.198S	6 x 8 mm	Sort <i>Black</i>
36.199	6 x 10 mm	Lysegrå <i>Light grey</i>
36.208	10 x 20 mm	Lysegrå <i>Light grey</i>
36.3314	12 x 17 mm	Mørkegrå <i>Dark grey</i>


Material: CR, mørkegrå *dark grey*
Hardness: SH 16 - 20
Density: 0,4

Material: NR, blågrå *blue grey*
Hardness: SH 16 - 20
Density: 0,45 - 0,6

Varenr. <i>Item no.</i>	A x B
36.198CR *	6 x 8 mm
36.200	8 x 8 mm

Varenr. <i>Item no.</i>	A x B
36.197	4 x 6 mm
36.198A *	6 x 8 mm

Svampegummi *Sponge rubber*



















Material: EPDM, mørkegrå *dark grey*
Hardness: SH 14 - 16
Density: 0,38 - 0,42

Flere størrelser kan skaffes. Find den komplette liste på [hjemmesiden](#) ved at scanne QR-koden.
Other sizes can be ordered. Scan the QR-code to see the complete list on our homepage.



Varenr. <i>Item no.</i>	A x B	Varenr. <i>Item no.</i>	A x B	Varenr. <i>Item no.</i>	A x B	Varenr. <i>Item no.</i>	A x B
35.0806 *	8 x 6 mm	35.1515	15 x 15 mm	35.2510	25 x 10 mm	35.3535 *	35 x 35 mm
35.1003 *	10 x 3 mm	35.1605 *	16 x 5 mm	35.2515	25 x 15 mm	35.4005 *	40 x 5 mm
35.1004 *	10 x 4 mm	35.1608 *	16 x 8 mm	35.2520	25 x 20 mm	35.4010	40 x 10 mm
35.1005	10 x 5 mm	35.2003 *	20 x 3 mm	35.2525	25 x 25 mm	35.4020	40 x 20 mm
35.1007 *	10 x 7 mm	35.2005	20 x 5 mm	35.3005 *	30 x 5 mm	35.4030 *	40 x 30 mm
35.1008	10 x 8 mm	35.20055 *	20 x 5,5 mm	35.3007	30 x 7 mm	35.4035 *	40 x 35 mm
35.1010	10 x 10 mm	35.2010	20 x 10 mm	35.3010	30 x 10 mm	35.4040	40 x 40 mm
35.1203 *	12 x 3 mm	35.2012	20 x 12 mm	35.3012 *	30 x 12 mm	35.4505 *	45 x 5 mm
35.1209 *	12 x 9 mm	35.2015	20 x 15 mm	35.3015	30 x 15 mm	35.5005 *	50 x 5 mm
35.1212	12 x 12 mm	35.2018 *	20 x 18 mm	35.3020	30 x 20 mm	35.5006 *	50 x 6 mm
35.1503 *	15 x 3 mm	35.2020	20 x 20 mm	35.3025	30 x 25 mm	35.5010 *	50 x 10 mm
35.1507 *	15 x 7 mm	35.2502	25 x 2 mm	35.3030	30 x 30 mm	35.6010 *	60 x 10 mm
35.1510	15 x 10 mm	35.2505	25 x 5 mm	35.3505 *	35 x 5 mm	35.6040 *	60 x 40 mm
35.1512 *	15 x 12 mm	35.2506 *	25 x 6 mm	35.3510 *	35 x 10 mm		

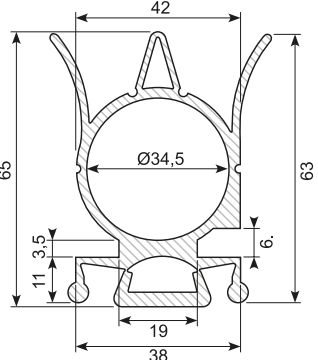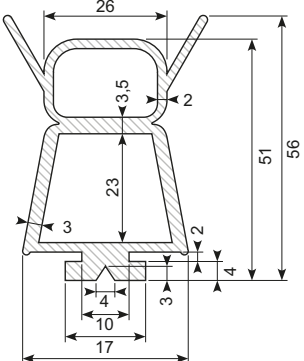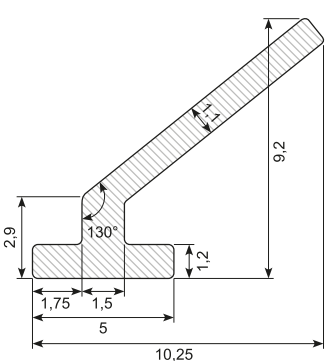* Skaffevare *Special order item*


30.10461-2 *  Profil med fod og indvendig snor. Profile with foot and internal cord. Material: EPDM, with cord Min. order: 3.000 m	52.PP106 *  Kabel overkørsel Cable transmission Material: NR / SBR Rulle med Roll of 9 m	30.13503  Material: EPDM, black Hardness: SH 60 For skinne For rail: 41.13459	41.13459 *  Aluprofil for port, eloxeret overflade. Aluprofile for gate, anodized surface. Length: 6 m Calculated weight: 479 g/m For profile: 30.13503
41.13459X *  Aluprofil for port, eloxeret overflade. Aluprofile for gate, anodized surface. Length: 6 m Calculated weight: 239 g/m For profile: 30.13503 Min. order: 50 pcs. + add on costs	30.9215  Material: EPDM Hardness: SH 65 - 70	30.9826-1  Material: EPDM Hardness: SH 70	30.9826-2  Material: EPDM Hardness: SH 70
30.10036  Material: EPDM Hardness: SH 70	30.13242 *  Material: EPDM co-ex Hardness: SH 85 / 62 Length: 3.000 mm For skinne For rail: 41.670 Min. order: 3.000 m	41.670  Eloxeret aluminium 3 m med montagehuller. Ø4 hver 200 mm. For profile 30.13242	30.16239  Material: EPDM Hardness: SH 70
30.9996-5  Material: EPDM Hardness: SH 70	30.9387-1  Material: EPDM Hardness: SH 70 Med indvendig snor With internal cord	30.9996-4  Material: EPDM Hardness: SH 70	30.9437-125  Ventilation ring Material: EPDM, black Hardness: SH 60 - 65

Svampegummi *Sponge rubber*

Material: NR, mørkegrå *dark grey*

Hardness: SH 16 - 20

Density: 0,4 - 0,5



Varenr. <i>Item no.</i>	A x B
36.0505 *	5 x 5 mm
36.0806 *	8 x 6 mm
36.1005	10 x 5 mm
36.1005G * lysegrå <i>light grey</i>	10 x 5 mm
36.1007 *	10 x 7 mm
36.1008 *	10 x 8 mm
36.1010 * sort <i>black</i>	10 x 10 mm
36.1205 *	12 x 5 mm
36.1206 *	12 x 6 mm
36.1210 *	12 x 10 mm
36.1503 *	15 x 3 mm
36.1510 *	15 x 10 mm
36.1512 *	15 x 12 mm
36.1515 *	15 x 15 mm
36.1604 *	16 x 4 mm


Varenr. <i>Item no.</i>	A x B
36.1605 *	16 x 5 mm
36.1808G *	18 x 8 mm
36.1816 *	18 x 16 mm
36.2002 *	20 x 2 mm
36.2003 *	20 x 3 mm
36.2005 *	20 x 5 mm
36.2010	20 x 10 mm
36.2020	20 x 20 mm
36.2503 *	25 x 3 mm
36.2505 *	25 x 5 mm
36.2510 *	25 x 10 mm
36.2515 *	25 x 15 mm
36.2520 *	25 x 20 mm
36.2525 *	25 x 25 mm
36.3003 *	30 x 3 mm

Varenr. <i>Item no.</i>	A x B
36.3005 *	30 x 5 mm
36.3010	30 x 10 mm
36.3015	30 x 15 mm
36.3020 *	30 x 20 mm
36.3030 *	30 x 30 mm
36.3516 *	35 x 16 mm
36.4010 *	40 x 10 mm
36.4012 *	40 x 12 mm
36.4015 *	40 x 15 mm
36.4025 *	40 x 25 mm
36.5010 *	50 x 10 mm
36.5020 *	50 x 20 mm
36.5025 *	50 x 25 mm
36.5030 *	50 x 30 mm

Svampegummi *Sponge rubber*

Material: Economy EPDM, sort *black*

Density: 0,45




Varenr. <i>Item no.</i>	A x B	Min. order
36.1005X *	10 x 5 mm	3.000 m
36.1007X *	10 x 7 mm	3.000 m
36.1406X *	14 x 6 mm	3.000 m
36.1505X *	15 x 5 mm	3.000 m
36.1507X *	15 x 7 mm	3.000 m
36.2005X *	20 x 5 mm	3.000 m
36.2008X	20 x 8 mm	
36.2505X *	25 x 5 mm	3.000 m
36.2507X *	25 x 7 mm	3.000 m
36.2508X *	25 x 8 mm	3.000 m
36.3003X *	30 x 3 mm	
36.3005X *	30 x 5 mm	
36.3006X *	30 x 6 mm	3.000 m
36.3305X *	33 x 5 mm	3.000 m
36.5005X *	50 x 5 mm	2.000 m

Varenr. <i>Item no.</i>	A x B	Bløde hjørner <i>Soft corners</i>	Min. order
36.1010X *	10 x 10 mm		3.000 m
36.1210X *	12 x 10 mm		3.000 m
36.1212X *	12 x 12 mm		3.000 m
36.12511X *	12,5 x 11 mm		3.000 m
36.1612X *	16 x 12 mm		3.000 m
36.2010X *	20 x 10 mm		3.000 m
36.2318X *	23 x 18 mm		2.000 m
36.2512X *	25 x 12 mm	Ja <i>Yes</i>	2.000 m
36.3015X *	30 x 15 mm		1.500 m
36.3020X *	30 x 20 mm	Ja <i>Yes</i>	1.500 m
36.3515X *	35 x 15 mm	Ja <i>Yes</i>	1.500 m
36.3520X *	35 x 20 mm	Ja <i>Yes</i>	1.000 m
36.4010X *	40 x 10 mm		2.000 m
36.4020X	40 x 20 mm	Ja <i>Yes</i>	3.000 m
36.5010X *	50 x 10 mm		1.000 m

Material: CR, sort *black*

Hardness: SH 18 - 25


Density: 0,5 - 0,75



Varenr. <i>Item no.</i>	A x B
36.1010CR *	10 x 10 mm
36.2010CR *	20 x 10 mm
36.2020CR *	20 x 20 mm
36.3015CR *	30 x 15 mm
36.64004CR *	40 x 4 mm
36.4020CR *	40 x 20 mm
36.60503CR *	50 x 3 mm
36.5005CR *	50 x 5 mm

* Skaffevare *Special order item*

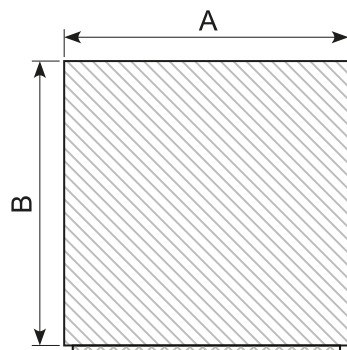Silikonesvampegummi *Silicone sponge rubber*



Industry quality: -60°C / +220°C

Med klæb *With tape*: -60°C / +180°C

Material: Silicone, råhvid *off white*

Hardness: SH 16 - 20

Density: 0,4 - 0,5

F: FDA

K: Med klæb *With adhesive*

Varenr. <i>Item no.</i>	A x B
36.1010SIH *	10 x 10 mm
36.1512SIH *	15 x 12 mm
36.1515SIH	15 x 15 mm
36.1610SIH	16 x 10 mm
36.2003SIH *	20 x 3 mm
36.2005SIH *	20 x 5 mm
36.2005SIHK *	20 x 5 mm
36.2010SIH *	20 x 10 mm
36.2010SIHK *	20 x 10 mm
36.2015SIH *	20 x 15 mm
36.2020SIH *	20 x 20 mm
36.2020SIHF *	20 x 20 mm
36.2505SIH	25 x 5 mm
36.2505SIHF *	25 x 5 mm
36.2510SIH	25 x 10 mm
36.2515SIH *	25 x 15 mm
36.2520SIH	25 x 20 mm
36.3005SIHK *	30 x 5 mm
36.3020SIH *	30 x 20 mm
36.4005SIHK *	40 x 5 mm
36.4012SIH *	40 x 12 mm

Industry quality: -60 °C / +200 °C

Material: Silicone, hvid *white*

Hardness: SH 16 - 20

Density: 0,55 - 0,65

I overensstemmelse med (E6) 1935/2004 og EU 10/2011 i kontakt med fødevarer *Compliant to (E6) 1935/2004 and EU 10/2011 in contact with food*

F: FDA

K: Med klæb. Disse kan ikke anvendes i kontakt med fødevarer *With adhesive. These can not be used in contact with food*

Varenr. <i>Item no.</i>	A x B
36.1204SIHKF *	12 x 4 mm
36.1505SIHF *	15 x 5 mm
36.1616SIHF *	16 x 16 mm
36.2005SIHF *	20 x 5 mm
36.3005SIHKF *	30 x 5 mm

Industry quality: -60°C / +200°C

Material: Silicone, hvid *white*

Hardness: SH 16 - 20

Density: 0,55 - 0,65


Varenr. <i>Item no.</i>	A x B
36.1006SIH *	10 x 6 mm
36.1212SIH	12 x 12 mm
36.1505SIH *	15 x 5 mm
36.2525SIH *	25 x 25 mm
36.3010SIH *	30 x 10 mm
36.5005SIH *	50 x 5 mm

Svampegummiplader *Sponge rubber plates*

Density: 0,6

Color: Mørkegrå *Dark grey*

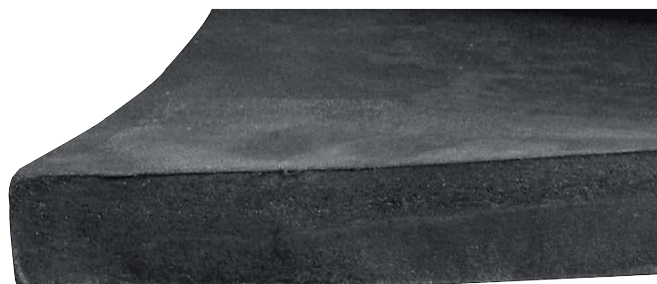Size: 1 x 1 m



Varenr. <i>Item no.</i>	Tykkelse <i>Thickness</i>	Materiale <i>Material</i>
38.152EPDM	2 mm	EPDM
38.153EPDM	3 mm	EPDM
38.154EPDM *	4 mm	EPDM
38.155EPDM *	5 mm	EPDM
38.156EPDM *	6 mm	EPDM
38.158EPDM *	8 mm	EPDM
38.160EPDM *	10 mm	EPDM
38.162EPDM *	12 mm	EPDM
38.165EPDM *	15 mm	EPDM
38.170EPDM	20 mm	EPDM
38.175EPDM	25 mm	EPDM
38.180NR *	30 mm	NR

















Mange svampegummiplader vil udgå pga. min. ordre 50 stk. Se evt. cellegummiplader om alternativ

Many sponge rubber sheets will be discontinued due to min. order 50 pcs. See cellular rubber sheets for alternative

















Svampegummi med svøb *Sponge rubber with shell*

36.K608	36.K613	36.K616	36.K671
Color: Black	Color: Black	Color: Black	Color: Black
36.K675	36.K676	36.K677	36.K678
Color: Black	Color: Black	Color: Black	Color: Black









* Skaffevare *Special order item*

36.K679 *  Color: Black	36.K680 *  Color: Black	36.K681 *  Color: Black	36.K683 *  Color: Black
36.K695 *  Color: Black	36.K697 *  Color: Black	36.K698 *  Color: Black	36.K852 *  Color: Black
36.K853 *  Color: Black	36.3351 *  Material: EPDM, black Hardness: SH 14 - 16 Density: 0,38 - 0,4 Min. order: 100 m	36.3354 *  Material: NR, dark grey Hardness: SH 16-20 Density: 0,4 Min. order: 2.400 m	36.3813  Material: EPDM, dark grey Hardness: SH 16-20 Density: 0,4 - 0,45
36.B380  Material: EPDM Length: 3 m	36.3315  Material: EPDM, black Hardness: SH 18 - 20 Density: 0,45 - 0,55	36.3504  Material: EPDM, dark grey Hardness: SH 14 - 16 Density: 0,38 - 0,42	36.3881 / 36.3881S *  Material: EPDM, grey/black Hardness: SH 16 - 20 Density: 0,4 - 0,5 36.3881S *: Black

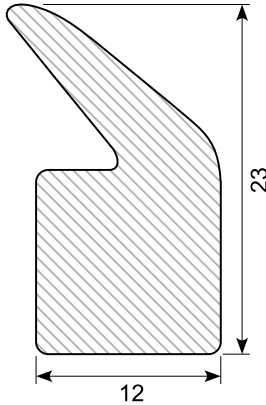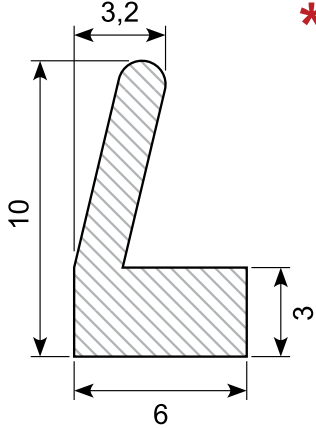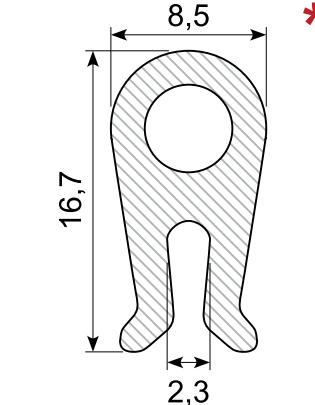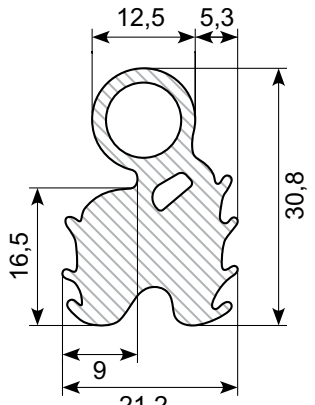* Skaffevare Special order item

36.14044 *  Material: EPDM Min. order: 500 m	36.3704  Material: NR, dark grey Hardness: SH 20 - 25 Density: 0,55 - 0,65	30.13144XX  Material: Sponge EPDM Med klæb With adhesive	36.3882  Material: CR, black
36.3897 *  Material: EPDM, light grey	30.13315 *  Material: EPDM Density: 0,7 Med klæb With adhesive Min. order: 1.000 m	30.9884S *  Material: EPDM Min. order: 3.000 m	30.E368  Material: EPDM, black
36.730805H *  Material: EPDM, white Density: 0,25 - 0,40 Med klæb With adhesive Min. order: 21.600 m	36.9086S  Material: EPDM, black Density: 0,35 Med klæb With adhesive	36.730808 *  Material: EPDM, black Density: 0,25 - 0,35 Med klæb With adhesive Min. order: 21.600 m	36.9088S  Material: EPDM, black Density: 0,35 Med klæb With adhesive
36.730810  Material: EPDM, black Density: 0,35 - 0,45 Med klæb With adhesive	36.90810  Material: EPDM, black Density: 0,35 - 0,45 Med klæb With adhesive	36.730906 / 36.730906H *  Material: EPDM, black / white Density: 0,25 - 0,35 Med klæb With adhesive 36.730906H: Min. order: 4.800 m	36.730907 / 36.730907G / 36.730907H  Material: EPDM, black / light grey / white Density: 0,25 - 0,35 Med klæb With adhesive

* Skaffevare Special order item

36.730955	36.730955G/36.730955H/36.730955B	36.80955S	36.740907H *
 Material: EPDM, black Density: 0,25 - 0,35 Med klæb <i>With adhesive</i>	 Material: EPDM, 36.730955G: Grey 36.730955H: White 36.730955B *: Brown Density: 0,25 - 0,35	 Material: EPDM, black Density: 0,35 Med klæb <i>With adhesive</i>	 Material: EPDM, white Density: 0,35 - 0,45 Med klæb <i>With adhesive</i> Min. order: 21.600 m
36.731210 / 36.731210H	36.731412D	36.732115	36.92117
 Material: EPDM, black / white Density: 0,25 - 0,35 Med klæb <i>With adhesive</i>	 Material: EPDM, black Density: 0,25 - 0,35 Med klæb <i>With adhesive</i>	 Material: EPDM, black Density: 0,45 - 0,55 Med klæb <i>With adhesive</i>	 Material: EPDM, black Density: 0,35 Med klæb <i>With adhesive</i>

Special order - Sponge rubber profiles

We can supply many sponge rubber profiles in different shapes. Below you can see a small selection.
Price and item number on request.

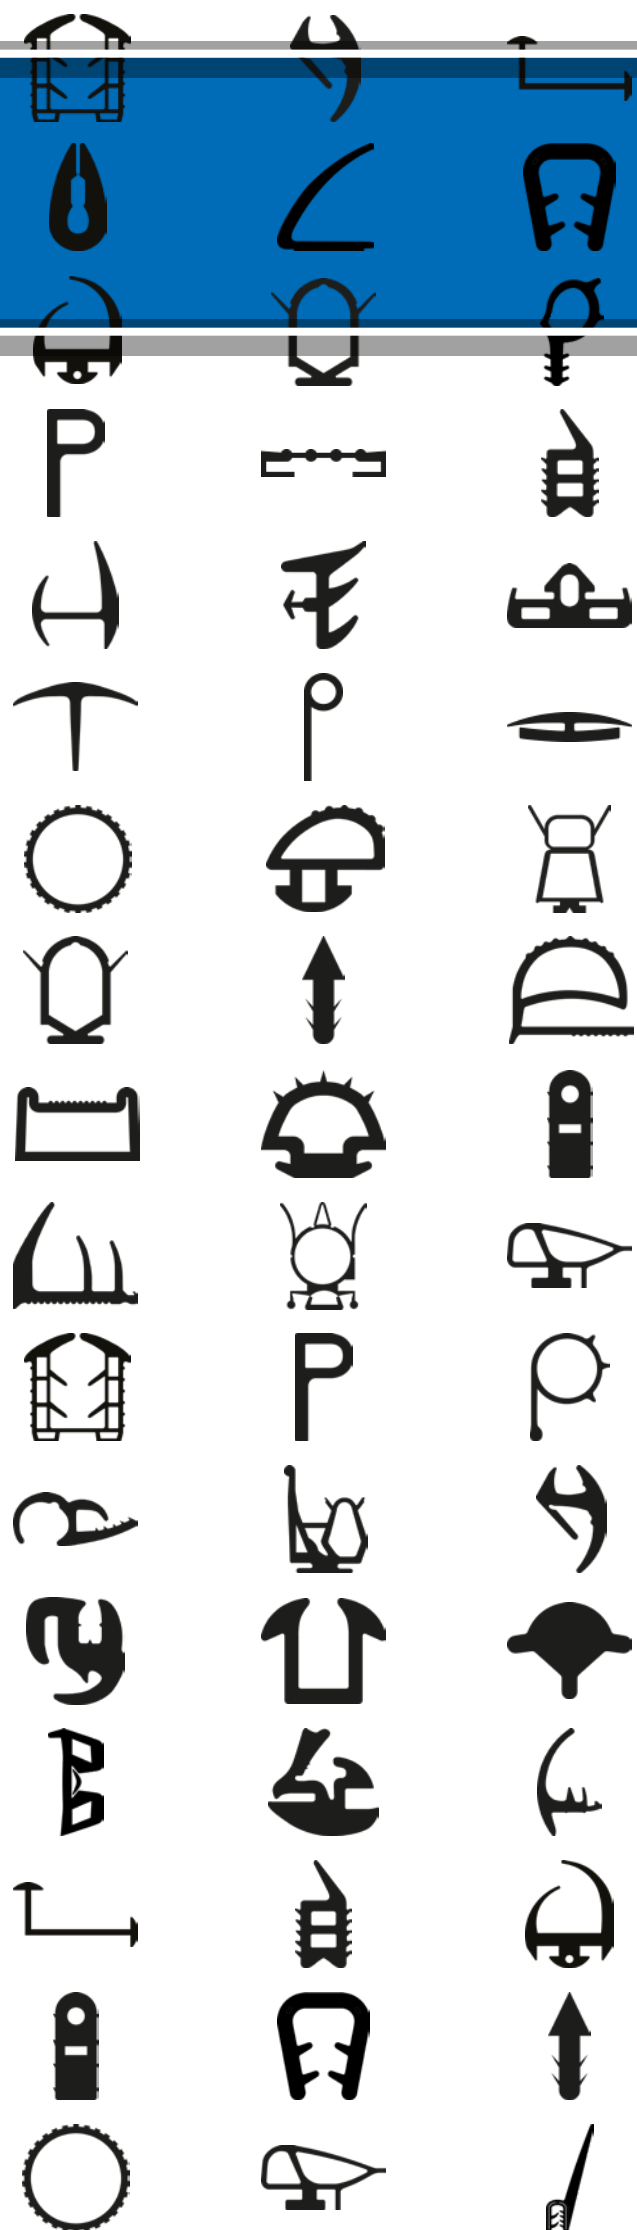


















* Skaffevare Special order item

Window seals

Window seals with adhesive is versatile for windows, greenhouses and thermal glass, a leaking garden door or as a spacer. Like sponge rubber, this kind of rubber easily molds to all structures and counteracts leaks.

There are many materials and colors, so you can always get a product that suits your requirements.




36.720802  Material: EPDM, black Density: 0,35 - 0,45 Med klæb <i>With adhesive</i>	36.720803  Material: EPDM, black Density: 0,35 - 0,45 Med klæb <i>With adhesive</i>	36.720904  Material: EPDM, black Density: 0,35 - 0,45 Med klæb <i>With adhesive</i>	36.720903  Material: EPDM, black Density: 0,35 - 0,45 Med klæb <i>With adhesive</i>
36.721004  Material: EPDM, black Density: 0,35 - 0,45 Med klæb <i>With adhesive</i>	36.721004-6  Material: EPDM, black Density: 0,35 - 0,45 Med smal 6 mm klæb <i>With narrow 6 mm adhesive</i>	36.721006  Material: EPDM, black Density: 0,35 - 0,45 Med klæb <i>With adhesive</i>	36.721005  Material: EPDM, black Density: 0,35 - 0,45 Med klæb <i>With adhesive</i>
36.721202  Material: EPDM, black Density: 0,35 - 0,45 Med klæb <i>With adhesive</i>	36.721203  Material: EPDM, black Density: 0,35 - 0,45 Med klæb <i>With adhesive</i>	36.7213564  Material: EPDM, black Density: 0,35 - 0,45 Med klæb <i>With adhesive</i>	36.721503  Material: EPDM, black Density: 0,35 - 0,45 Med klæb <i>With adhesive</i>
36.721504  Material: EPDM, black Density: 0,35 - 0,45 Med klæb <i>With adhesive</i>	36.721508  Material: EPDM, black Density: 0,35 - 0,45 Med klæb <i>With adhesive</i>	36.721508B  Material: EPDM, black Density: 0,25 - 0,35 Med klæb <i>With adhesive</i>	36.722004  Material: EPDM, black Density: 0,35 - 0,45 Med klæb <i>With adhesive</i>

Cellular rubber

Cellular rubber is extruded. During production, the addition of gas results in a completely uniform cell structure - also on the surface.

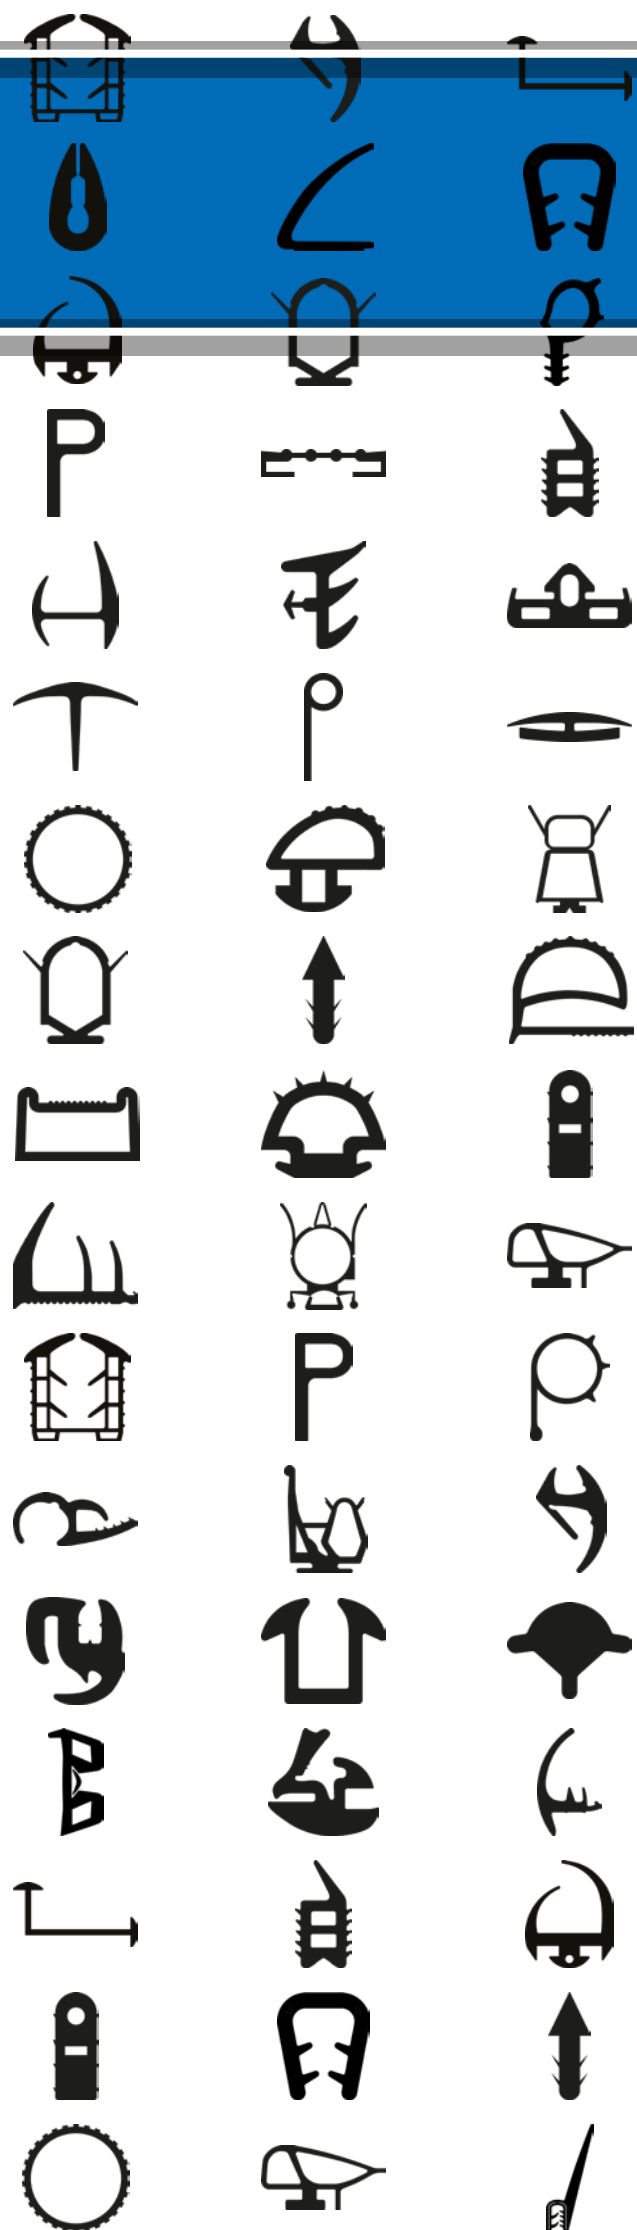Our cellular rubber has very low tolerances. Therefore it is often used in industry with special glue. Available in EPDM and CR.




Sicocell

Material: EPDM, sort *black*

Hardness: SH 25

Density: 0,14

Med klæb *With adhesive*



Varenr. <i>Item no.</i>	A x B	Varenr. <i>Item no.</i>	A x B	Varenr. <i>Item no.</i>	A x B	Varenr. <i>Item no.</i>	A x B
36.60403	4 x 3 mm	36.61008	10 x 8 mm	36.61603	16 x 3 mm	36.63005	30 x 5 mm
36.60404	4 x 4 mm	36.61010	10 x 10 mm	36.61710	17 x 10 mm	36.63010	30 x 10 mm
36.60503	5 x 3 mm	36.61203	12 x 3 mm	36.61808 *	18 x 8 mm	36.63012	30 x 12 mm
36.60505	5 x 5 mm	36.61204 *	12 x 4 mm	36.62002	20 x 2 mm	36.64003	40 x 3 mm
36.60605 *	6 x 5 mm	36.61205 *	12 x 5 mm	36.62003	20 x 3 mm	36.64005	40 x 5 mm
36.60802	8 x 2 mm	36.61310	13 x 10 mm	36.62004	20 x 4 mm	36.64010	40 x 10 mm
36.60803	8 x 3 mm	36.61502 *	15 x 2 mm	36.62005	20 x 5 mm	36.64015	40 x 15 mm
36.60804	8 x 4 mm	36.61503	15 x 3 mm	36.62008	20 x 8 mm	36.64020	40 x 20 mm
36.60805 *	8 x 5 mm	36.61505	15 x 5 mm	36.62010	20 x 10 mm	36.65003	50 x 3 mm
36.60808	8 x 8 mm	36.61506	15 x 6 mm	36.62020	20 x 20 mm	36.65010	50 x 10 mm
36.61001	10 x 1 mm	36.61508	15 x 8 mm	36.62305 *	23 x 5 mm	36.66002	60 x 2 mm
36.61002	10 x 2 mm	36.61510	15 x 10 mm	36.62502	25 x 2 mm	36.66004 *	60 x 4 mm
36.61003	10 x 3 mm	36.61512	15 x 12 mm	36.62506	25 x 6 mm	36.66004X *	60 x 4 mm
36.61004	10 x 4 mm	36.61518	15 x 18 mm	36.62510	25 x 10 mm	36.67502 *	75 x 2 mm
36.61005	10 x 5 mm	36.61530 *	15 x 30 mm	36.62525 *	25 x 25 mm		


Sicocell

Material:

- **CR:** med standard klæb *with standard adhesive*
- **CR-5952:** tape uden glasfiber *tape without glassfiber*

Hardness: SH 25

Density: 0,14



Varenr. <i>Item no.</i>	A x B
36.60802CR	8 x 2 mm
36.60804CR	8 x 4 mm
36.60808CR *	8 x 8 mm
36.61003CR	10 x 3 mm
36.61010CR *	10 x 10 mm
36.61609CR *	16 x 9 mm

Varenr. <i>Item no.</i>	A x B
36.62002CR *	20 x 2 mm
36.62004CR *	20 x 4 mm
36.2005CR *	20 x 5 mm
36.2502CR *	25 x 2 mm
36.62505CR *	25 x 5 mm
36.63005CR-5952 *	30 x 5 mm
36.63030CR *	30 x 30 mm

Varenr. <i>Item no.</i>	A x B
36.63204CR *	32 x 4 mm
36.64004CR *	40 x 4 mm
36.64005CR *	40 x 5 mm
36.65005CR *	50 x 5 mm
36.65005CR-5952 *	50 x 5 mm
36.65007CR *	50 x 7 mm
36.68005CR *	80 x 5 mm
36.68005CR-5952 *	80 x 5 mm

Cellegummiplade *Cellular rubber plates*

Uden klæb *No adhesive*

Material: EPDM, sort *black*

Density: 0,12

Varenr. <i>Item no.</i>	Tykkelse <i>Thickness</i>	Vidde <i>Width</i>	Længde <i>Length</i>
38.27700002	2 mm	20.000 mm	1.000 mm
38.27700003	3 mm	20.000 mm	1.000 mm
38.27700004	4 mm	20.000 mm	1.000 mm
38.27700005	5 mm	20.000 mm	1.000 mm
38.27700006	6 mm	20.000 mm	1.000 mm
38.27700008	8 mm	20.000 mm	1.000 mm
38.27700010	10 mm	20.000 mm	1.000 mm
38.27700015	15 mm	10.000 mm	1.000 mm
38.27700020	20 mm	10.000 mm	1.000 mm
38.27700025	25 mm	2.000 mm	1.000 mm
38.188 *	40 mm	2.000 mm	1.000 mm
38.189 *	50 mm	2.000 mm	1.000 mm

Cellegummiplade *Cellular rubber plates*

Med klæb *With adhesive*

Material: EPDM, sort *black*

Varenr. <i>Item no.</i>	Tykkelse <i>Thickness</i>	Vidde <i>Width</i>	Længde <i>Length</i>
38.160E/K *	1.000 mm	10 mm	2.000 mm
38.170E/K *	1.000 mm	20 mm	2.000 mm
38.175E/K *	1.000 mm	25 mm	2.000 mm

Cellegummiplade *Cellular rubber plates*

Material: CR, sort *black*

Varenr. <i>Item no.</i>	Tykkelse <i>Thickness</i>	Vidde <i>Width</i>	Længde <i>Length</i>
38.190 *	1.000 mm	10 mm	1.400 mm
38.191 *	1.000 mm	15 mm	1.400 mm

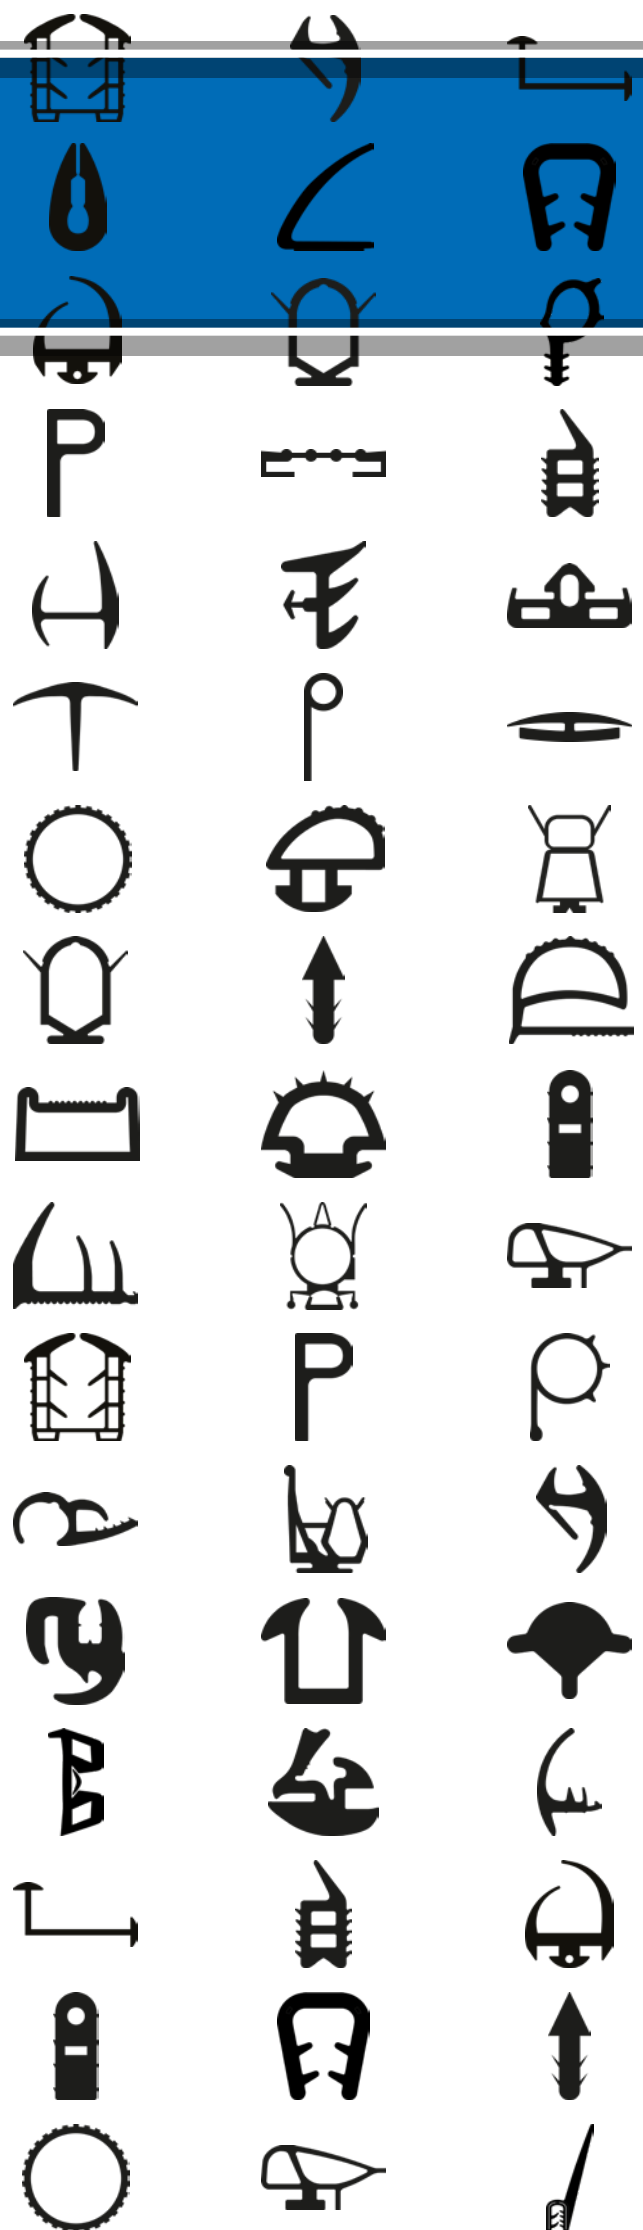
* Skaffevare *Special order item*

















Fenderlister

















Fender lists

Fenders are shock absorbing rubber items commonly used for boats, in harbors, forklifts and trucks.










We have fender lists in black, grey and white PVC. They are available in different sizes and constructions, but they are all UV resistant and durable.



34.601* / 34.601G*  Material: PVC, black Min. order: 5 m 34.601G: Grey Min. order: 50-500 m	34.602 / 34.602G*  Material: PVC, black Min. order: 5 m 34.602G*: Grey Min. order: 50 m	34.603 / 34.603G  Material: PVC, black 34.603G: Grey	34.604*  Material: PVC, black Min. order: 5 m
34.7102-50*  Material: PVC, black Min. order: 5 m	34.614*  Material: PVC, black Min. order: 50 m	34.3032*  Material: PVC, black Min. order: 51 m	34.641*  Material: PVC, black Min. order: 50 m
34.643  Material: PVC, black	34.644*  Material: PVC, black Min. order: 50 m	34.620010  Material: PVC, black	34.620040  Material: PVC, black
34.620210  Material: PVC, black	34.613  Material: PVC, black	34.7196  Material: PVC, black	34.7199*  Material: PVC, black Min. order: 25 m

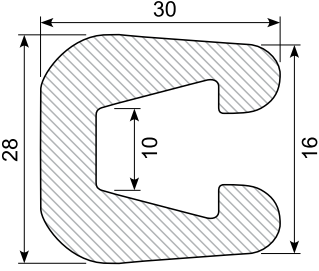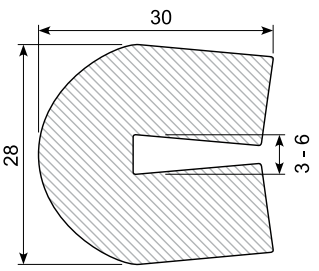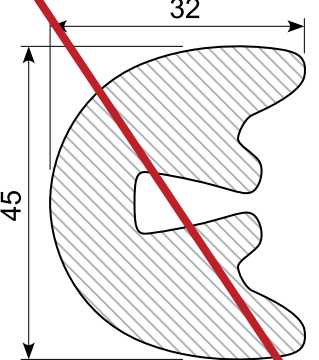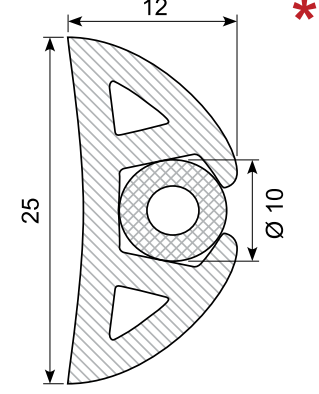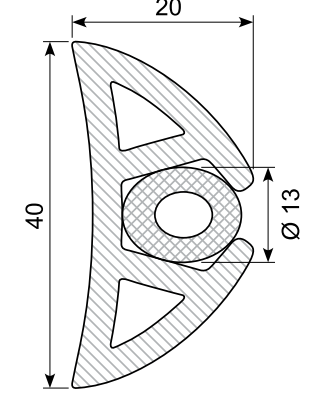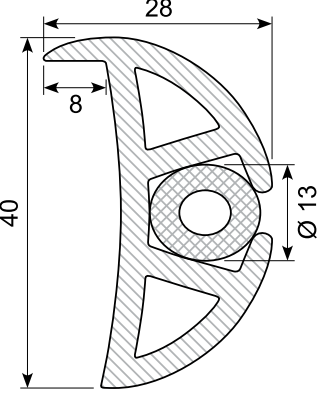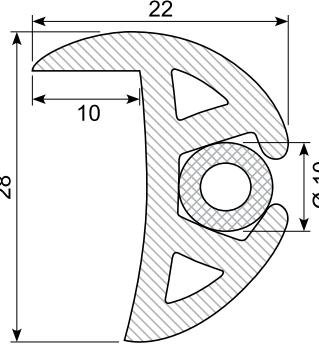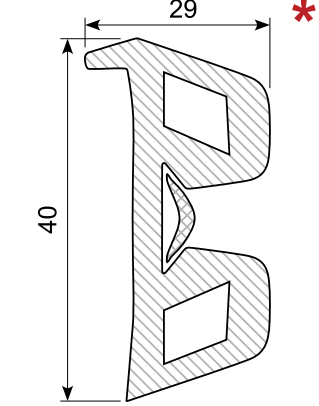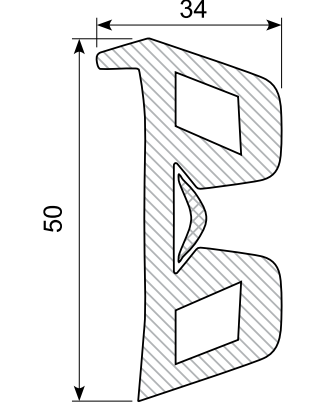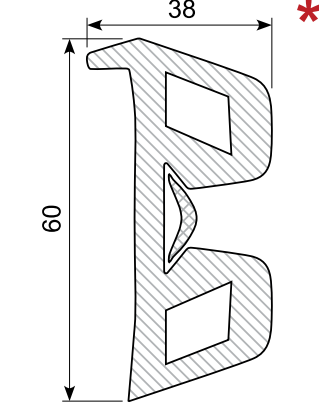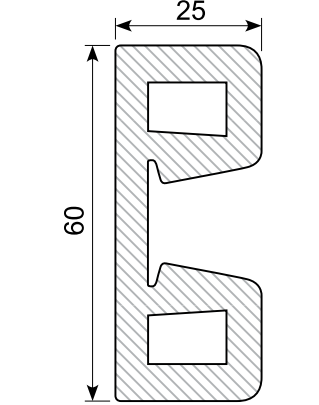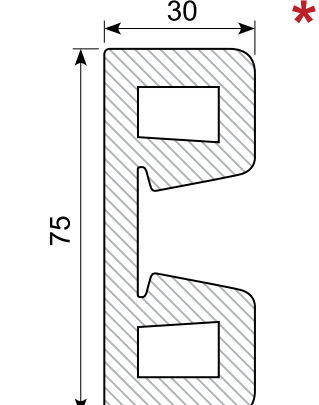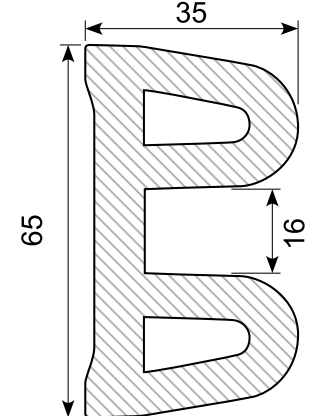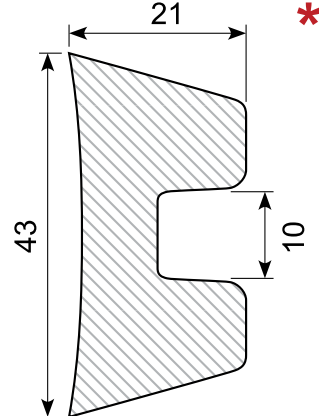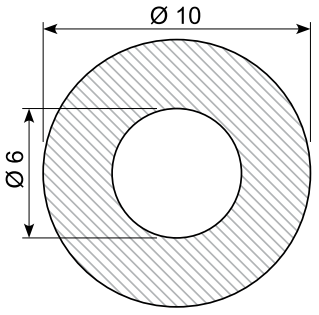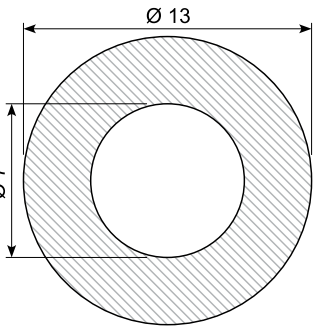34.620140 *  Material: PVC, black Min. order: 5 m	34.3011 *  Material: PVC, black	34.62110 *  Material: PVC, black Min. order: 5 m	34.62039 *  Material: PVC, black Min. order: 5 m
34.62040  Material: PVC, black	34.620420  Material: PVC, black	34.62041  Material: PVC, black	34.624 *  Material: PVC, black Min. order: 50 m
34.625  Material: PVC, black	34.626 *  Material: PVC, black Min. order: 5 m	34.636  Material: PVC, black	34.637 *  Material: PVC, black Min. order: 20 m
34.3020  Material: PVC, black	34.7514 *  Material: PVC, black Min. order: 5 m	34.62610S  Material: PVC, black	34.62713H  Material: PVC, white

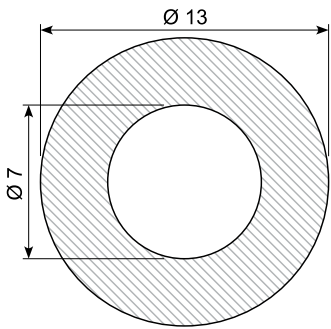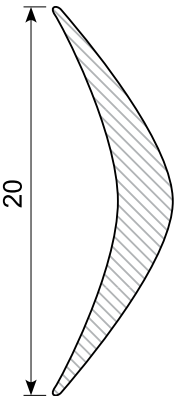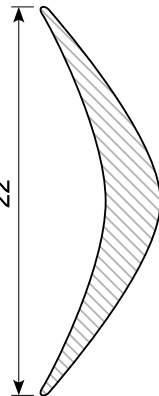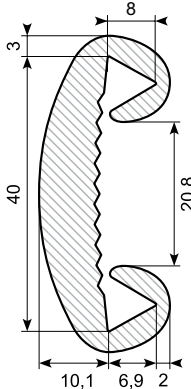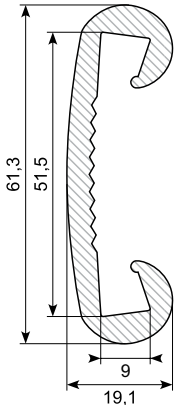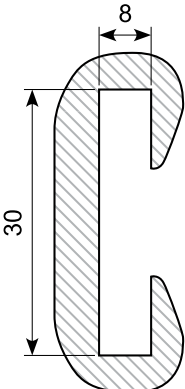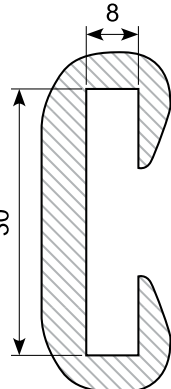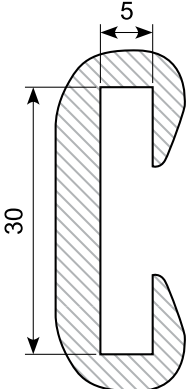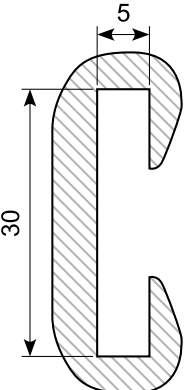
* Skaffevare Special order item

















34.62713S  Material: PVC, black	34.677 *  Material: PVC, white Min. order: 50 m	34.678 *  Material: PVC, white Min. order: 50 m	34.608X  Material: PVC, black
34.609X  Material: PVC, black	34.606 *  Material: PVC, black Min. order: 100 m	34.606X *  Material: PVC, black Min. order: 500 m	34.607  Material: PVC, black
34.607X *  Material: PVC, black Min. order: 500 m			

Sico trim

















We know trims from car doors and hatches. But they are also widely used in the service industry, such as hotels and the healthcare sector, where it's used to protect doors and walls from damage.

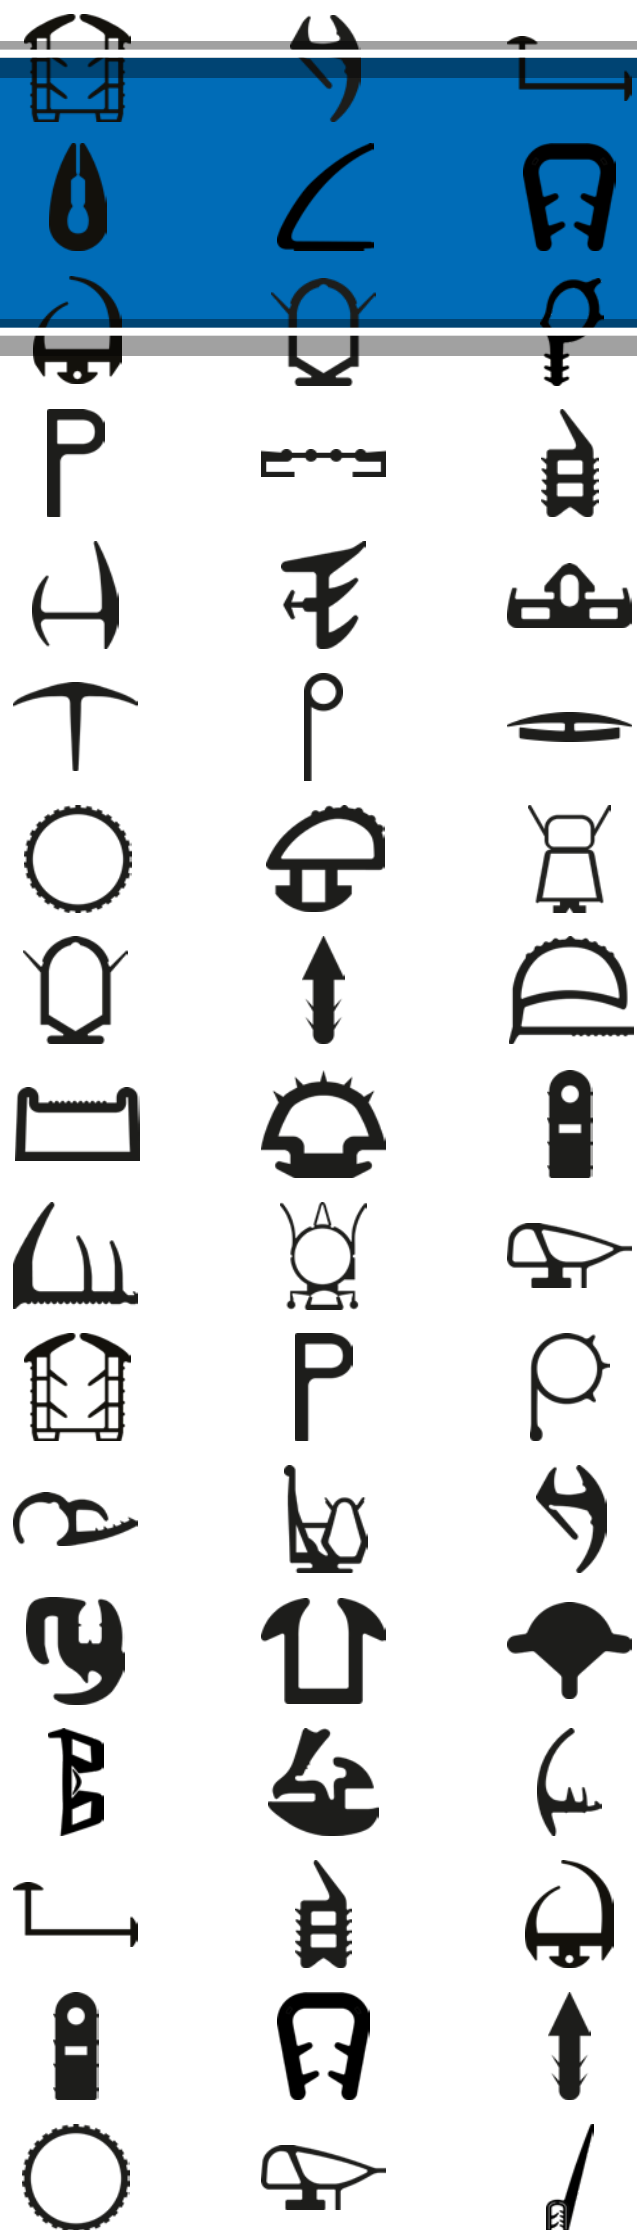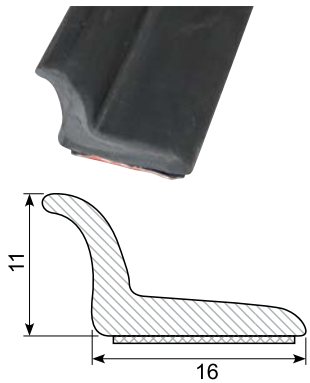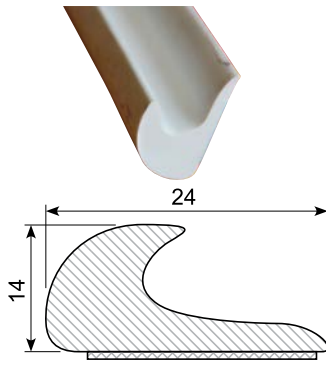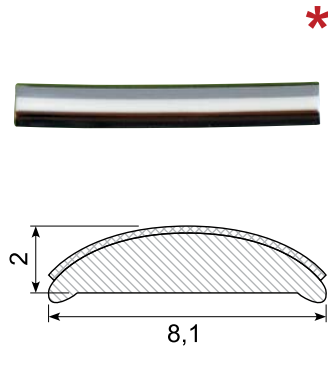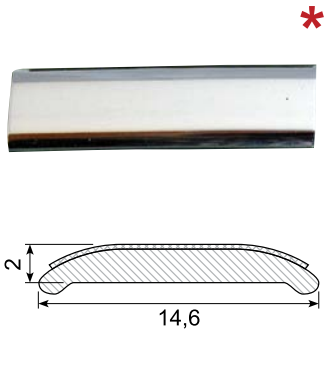They can also be used as exclusive end trims which is decorative, but also protective against dents. We have a wide range and have many more products than shown in this catalog.









45.206AL  Material: PVC Length: 2 m Med klæb <i>With adhesive</i>	45.224  Material: PVC, white Length: 25 m Med klæb <i>With adhesive</i>	45.217C *  Material: PVC, chrome Length: 5 m Med klæb <i>With adhesive</i>	45.221C *  Material: PVC, chrome Length: 5 m Med klæb <i>With adhesive</i>
45.347C *  Material: PVC, chrome Length: 5 m Med klæb <i>With adhesive</i>	45.884C *  Material: PVC, chrome Length: 5 m Med klæb <i>With adhesive</i>	45.383C *  Material: PVC, chrome Length: 5 m Med klæb <i>With adhesive</i>	45.388C *  Material: PVC, chrome Length: 5 m Med klæb <i>With adhesive</i>
45.705C *  Material: PVC, chrome Length: 5 m Med klæb <i>With adhesive</i>	45.832  Material: PVC Length: 25 m Med klæb <i>With adhesive</i>	45.836  Material: PVC Length: 25 m Med klæb <i>With adhesive</i>	45.837  Material: PVC Length: 25 m Hardness: SH 74 - 76 Density: 1,32 Med klæb <i>With adhesive</i>
45.839 *  Material: PVC Length: 25 m Med klæb <i>With adhesive</i> Min. order: 300 m	45.872  Material: PVC Length: 25 m Med klæb <i>With adhesive</i>	45.874  Material: PVC Length: 25 m Med klæb <i>With adhesive</i>	45.882  Material: PVC Length: 50 m Med klæb <i>With adhesive</i>

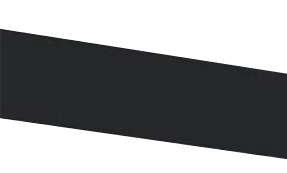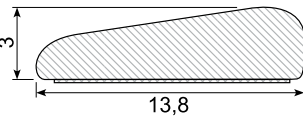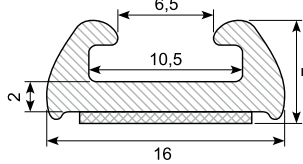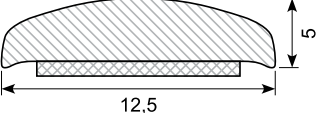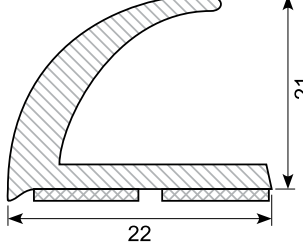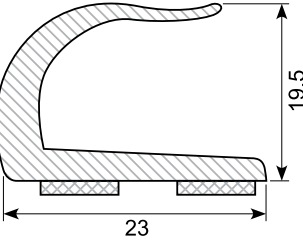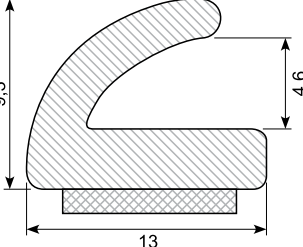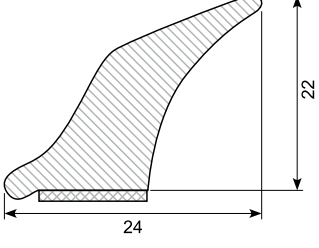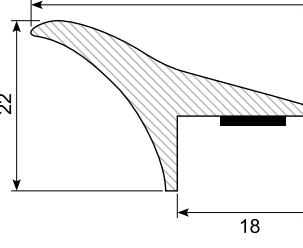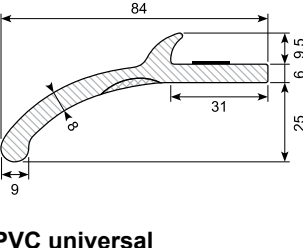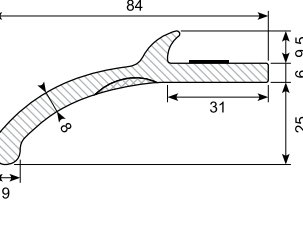* Skaffevare Special order item

45.886 / 45.886G   Material: PVC, black Length: 25 m Med klæb <i>With adhesive</i> 45.886G: Grey	45.894 *   Material: PVC Length: 25 m Med klæb <i>With adhesive</i> Min. order: 300 m	45.980A *   Material: PVC, chrome Length: 25 m Med klæb <i>With adhesive</i> Min. order: 500 m	45.980K *   Material: PVC Length: 340 mm Med klæb <i>With adhesive</i> Example fix lengths Min. order: 1.400 pcs.
45.980S *   Length: 25 m Min. order: 500 m	45.102G   Length: 25 m For LED lysstrips <i>For LED light strips</i>	45.308C / 45.308C-50 *  Material: PVC, chrome Length: 5 m 45.308C-50: 50 m Min. order: 300 m	45.309C / 45.309C-50 *  Material: PVC, chrome Length: 5 m 45.309C-50: 50 m Min. order: 300 m
45.216C-50 *  Material: PVC, chrome Length: 50 m Min. order: 300 m	45.123 *  Material: PVC Length: 25 m Med klæb <i>With adhesive</i> Min. order: 300 m	45.393 *  Material: PVC Length: 25 m Med klæb <i>With adhesive</i> Min. order: 300 m	45.394 *  Material: PVC Length: 25 m Med klæb <i>With adhesive</i> Min. order: 300 m
45.901 *  Rende Gutter Material: PVC Length: 25 m Med klæb <i>With adhesive</i> Min. order: 300 m	45.2031024 *  PVC universal hjulkassepanel <i>PVC universal wheel arch panel</i> Length: 1,5 m Sæt á 4 stk. Set of 4 pcs. Med klæb <i>With adhesive</i>	45.20511046 *  PVC universal hjulkassepanel <i>PVC universal wheel arch panel</i> Color: Black Length: 6 m Rulle Coil Med klæb <i>With adhesive</i>	45.20511091 *  PVC universal hjulkassepanel <i>PVC universal wheel arch panel</i> Length: 1,5 m Sæt á 4 stk. Set of 4 pcs. Med klæb <i>With adhesive</i>

* Skaffevare Special order item


45.2051445	45.235N1057	45.235N429	45.235NG1057
 PVC universal hjulkassepanel <i>PVC universal wheel arch panel</i> Length: 12,5 m Rulle <i>Coil</i> Med klæb <i>With adhesive</i>	 PVC universal hjulkassepanel <i>PVC universal wheel arch panel</i> Color: Black Length: 6 m Rulle <i>Coil</i> Med klæb <i>With adhesive</i>	 PVC universal hjulkassepanel <i>PVC universal wheel arch panel</i> Color: Black Length: 12,5 m Rulle <i>Coil</i> Med klæb <i>With adhesive</i>	 PVC universal hjulkassepanel <i>PVC universal wheel arch panel</i> Color: Grey/black Length: 6 m Rulle <i>Coil</i> Med klæb <i>With adhesive</i>
45.235NG429	31.4281		
 PVC universal hjulkassepanel <i>PVC universal wheel arch panel</i> Color: Grey/black Length: 12,5 m Rulle <i>Coil</i> Med klæb <i>With adhesive</i>	 Material: EPDM, black Hardness: SH 85 Length: 2,6 m		















Rubber buffer

A rubber buffer ensures a good distance between two elements, and also protects them from destroying each other.

















At home they are used as doorstops. In industry they are used on loading ramps and machine trolleys. In maritime they are used by trailers and racks for storage.

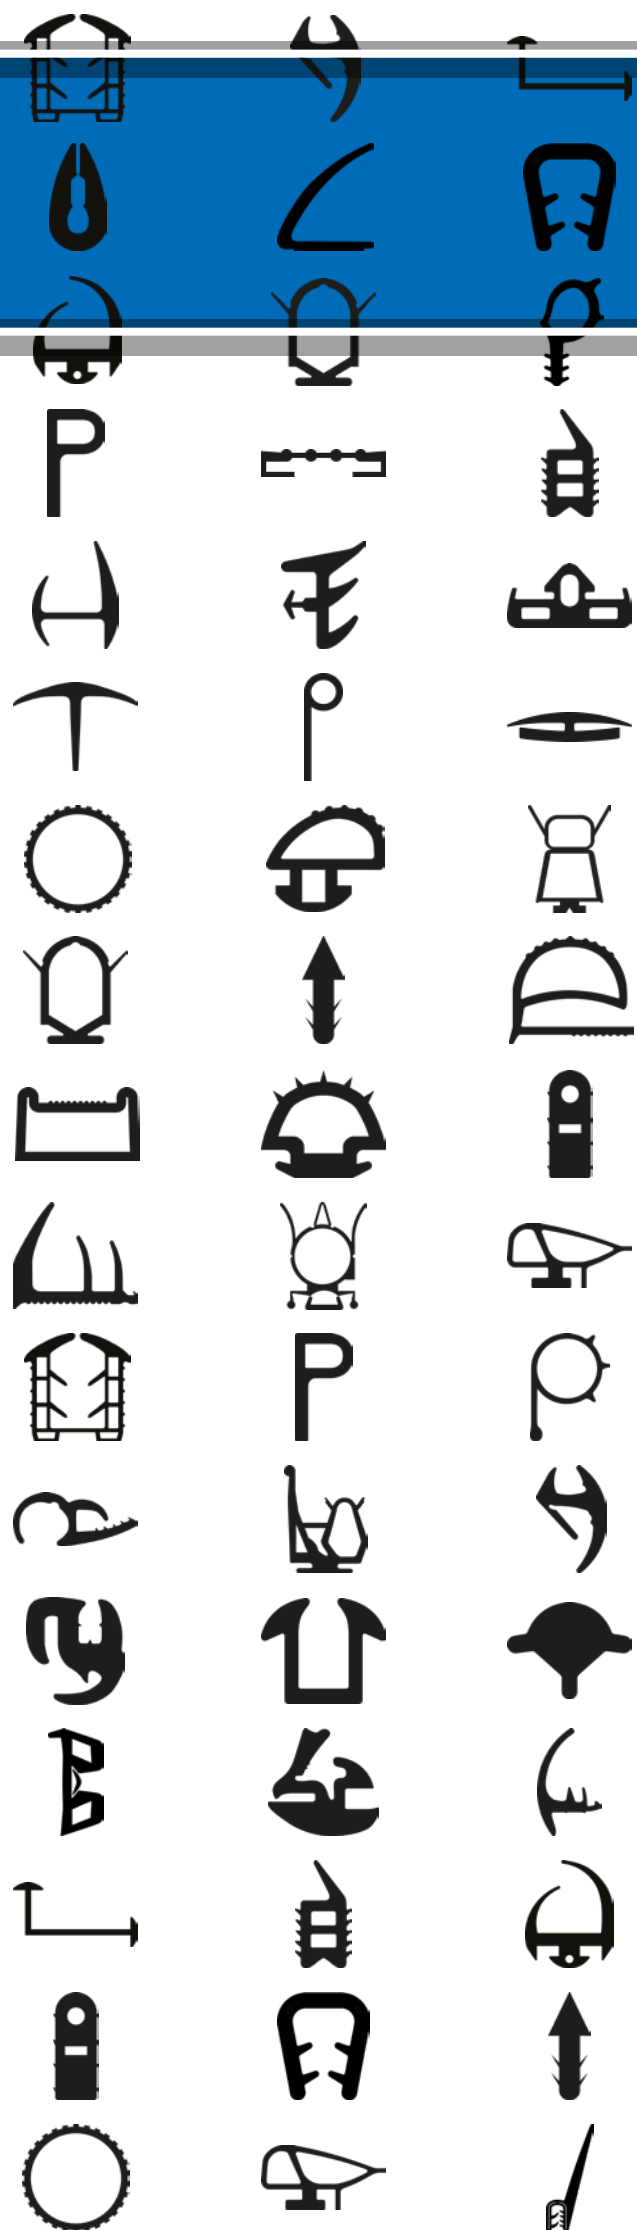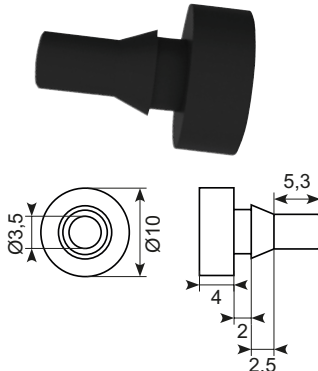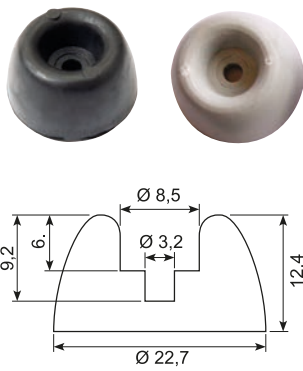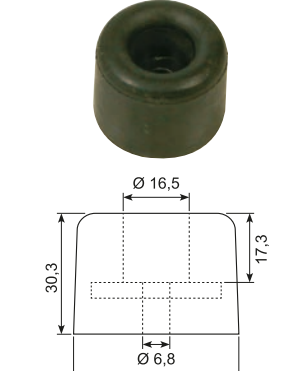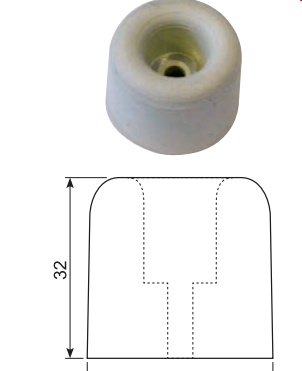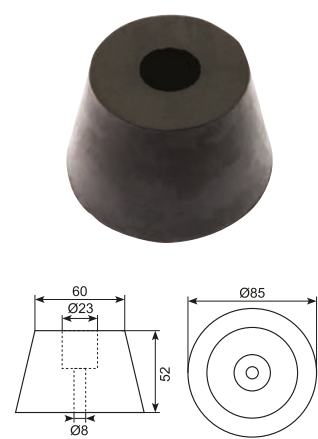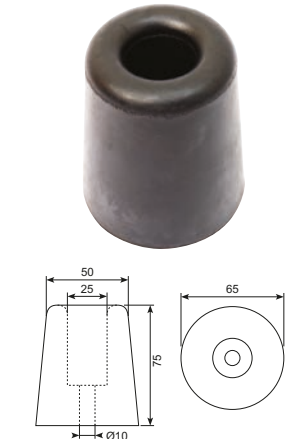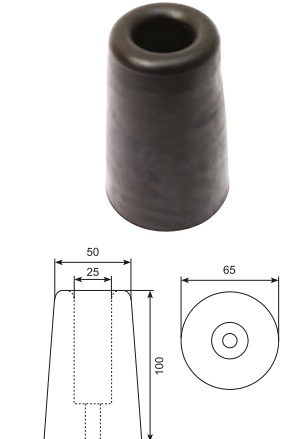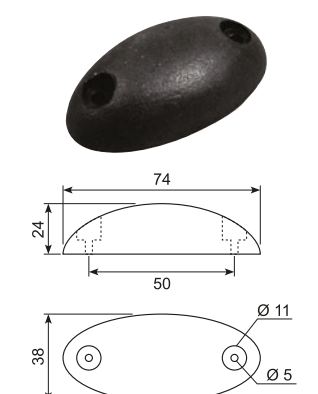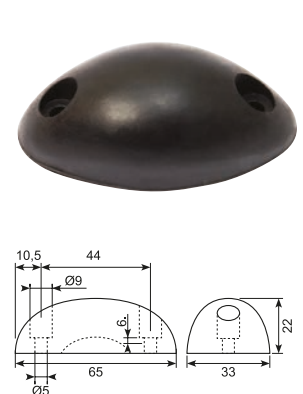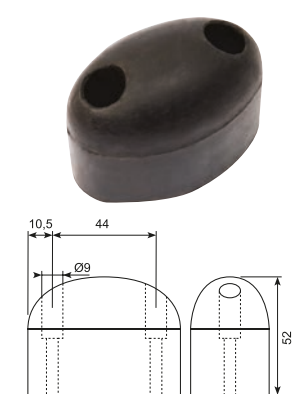We also have rubber blocks for car lifts in stock.







56.7001-007  Rubber stopper Grey - Ral 7035	39.171J / 39.171G  Color: Black 39.171G: Light grey	39.175J  Material: NR, black Hardness: SH 78	39.175H  Material: NR, white Min. order: 2.000 pcs.
39.167G  Grå gummibuffer Grey rubber buffer Material: NR / SBR	39.168G  Grå gummibuffer Grey rubber buffer Material: NR / SBR	39.169G  Grå gummibuffer Grey rubber buffer Material: NR / SBR	39.170G  Grå gummibuffer Grey rubber buffer Material: NR / SBR
39.174 	39.177 	39.178 	39.179 
39.632J  Oval gummibuffer, sort Oval rubber buffer, black	39.632A  Material: NR / SBR, black	39.632B  Material: NR / SBR, black	39.632C  Material: NR / SBR, black

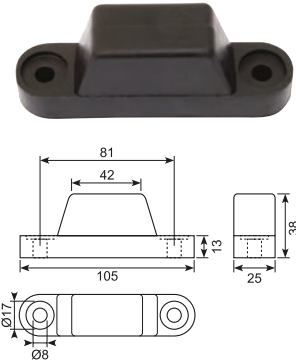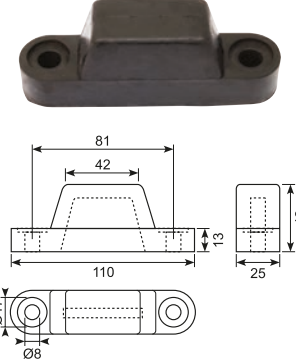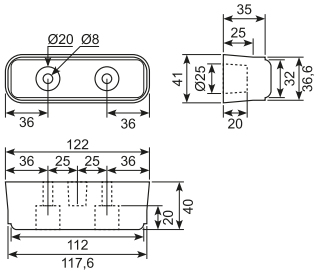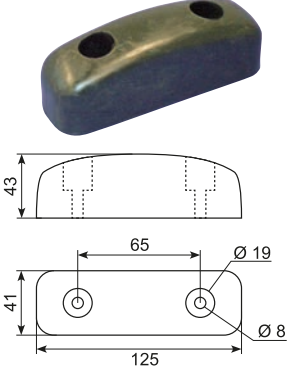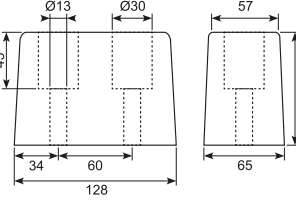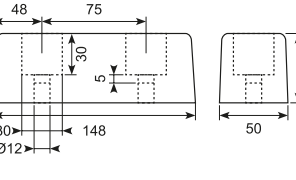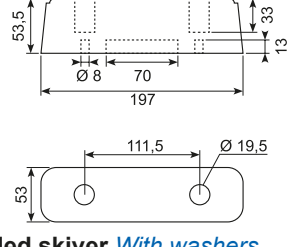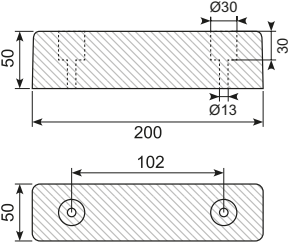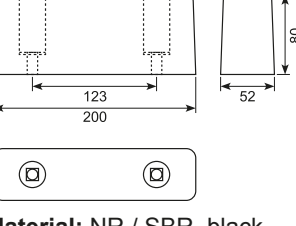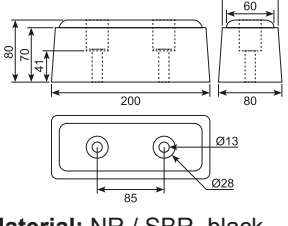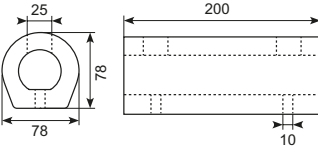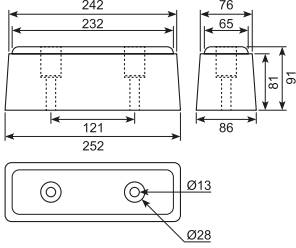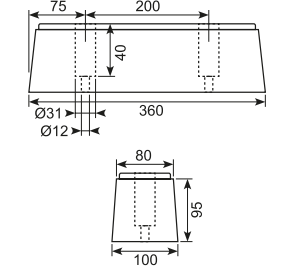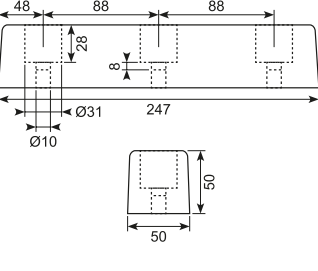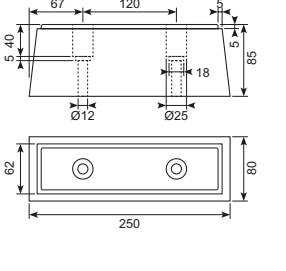✱ Skaffevare Special order item

39.172  Material: NR / SBR, black	39.173  Material: NR / SBR, black	39.626J  Material: NR, black Hardness: SH 85	39.637  Material: NR / SBR, black
39.625  Material: NR / SBR, black	39.624  Material: NR / SBR, black	39.623J  Let konisk <i>Slightly conical</i> Material: NR, black	39.620J  Med skiver <i>With washers</i> Material: NR, black Hardness: SH 85
39.638  Material: NR / SBR, black	39.181061  Material: NR / SBR, black Weight: 1.050 g	39.181052  Material: NR / SBR, black Weight: 1.370 g	39.627  Material: SBR, black
39.181060  Material: NR / SBR, black Weight: 1.370 g	39.360  Material: NR / SBR, black	39.628  Material: NR / SBR, black	39.646  Material: NR / SBR, black Weight: 1.800 g

39.629 Material: NR/SBR, black	39.634 Med stålskiver og stålhus <i>With steel washers and steel casing. 3 holes for 16 mm bolt</i> Material: EPDM, black	39.630 Material: NR/SBR, black	39.634P Material: NR/SBR, black
39.647 Material: NR/SBR, black	39.650 Material: NR/SBR, black	39.631X Material: SBR, black Hardness: SH 66	39.651A / 39.651 Material: NR/SBR 39.651: SBR & rayon
39.652 Material: NR/SBR, black	39.653 Material: NR/SBR, black	39.644 / 39.644A * Material: SBR & rayon 39.644A*: NR/SBR	39.631A Material: NR/SBR
39.648 Material: NR/SBR, black	39.649 Material: NR/SBR, black	39.642X / 39.642 Material: NR/SBR (Economy) 39.642: SBR & rayon	39.643X Material: NR/SBR (Economy)

* Skaffevare Special order item

39.635X	39.635	39.636X	39.636
			
			
Vulkaniseret nyt gummi <i>Vulcanized new rubber</i>	Vulkaniseret nyt gummi <i>Vulcanized new rubber</i>	Vulkaniseret nyt gummi <i>Vulcanized new rubber</i>	Vulkaniseret nyt gummi <i>Vulcanized new rubber</i>

Anslagsbuffere *Tipper pads*

Material: Stål / gummi *Steel / rubber*



Varenr. <i>Item no.</i>	Størrelse stålelement <i>Size steel element</i>	Størrelse gummielement <i>Size rubber element</i>	Vægt <i>Weight</i>
39.658	150 x 40 x 5 mm	100 x 40 x 25 mm	0,34 kg
39.656	152 x 88 x 6 mm	100 x 86 x 22 mm	0,75 kg
39.657	355 x 75 x 3 mm	290 x 74 x 27 mm	1,35 kg












Anslagsbuffere *Tipper pads*

Material: Stål / gummi *Steel / rubber*



Varenr. <i>Item no.</i>	Størrelse stålelement <i>Size steel element</i>	Størrelse gummielement <i>Size rubber element</i>	Vægt <i>Weight</i>
39.659 *	152 x 88 x 5 mm	100 x 86 x 23 mm	0,41 kg
39.660 *	152 x 88 x 5 mm	100 x 88 x 38 mm	0,6 kg
39.661 *	180 x 75 x 5 mm	115 x 75 x 29 mm	0,41 kg
39.662 *	180 x 75 x 5 mm	150 x 75 x 40 mm	0,6 kg
39.663 *	180 x 75 x 4 mm	115 x 75 x 46 mm	0,6 kg
39.664 *	190 x 115 x 6 mm	120 x 112 x 14 - 20 mm	0,6 kg
39.665 *	355 x 75 x 5 mm	290 x 75 x 39 mm	1,4 kg

39.180	39.181	39.182	39.183
			
Gummipude til liftstabilisatorer <i>Rubber pad for lift stabilizers</i> Size: Ø120 x H 26 mm Internal: Ø108 mm Material: SBR, black Hardness: SH 80	Gummipude til liftstabilisatorer <i>Rubber pad for lift stabilizers</i> Size: Ø120 x H 26 mm Internal: Ø108 mm Material: SBR, black Hardness: SH 75	Gummipude til liftstabilisatorer <i>Rubber pad for lift stabilizers</i> Size: Ø145 x H 24 mm Internal: Ø120 mm Material: SBR, black Hardness: SH 75	Gummipude til liftstabilisatorer <i>Rubber pad for lift stabilizers</i> Size: Ø145 x H 26 mm Internal: Ø135 mm Material: TPE, black Hardness: SH 80
39.183A	39.183B	39.183C	39.188
			
Gummipude til liftstabilisatorer <i>Rubber pad for lift stabilizers</i> Material: SBR, black Size: Ø100 x H 21 mm Internal: Ø80 mm Hardness: SH 80	Gummipude til liftstabilisatorer <i>Rubber pad for lift stabilizers</i> Material: SBR, black Size: Ø140 x H 25 mm Internal: Ø103 mm Hardness: SH 80	Gummipude til liftstabilisatorer <i>Rubber pad for lift stabilizers</i> Material: Black Size: Ø140 x H 25 mm Internal: Ø74 / 60 mm Hardness: SH 80	Gummipude til liftstabilisatorer <i>Rubber pad for lift stabilizers</i> Material: SBR, black Size: Ø160 x H 28 mm Internal: Ø135 mm Hardness: SH 75
39.184	39.185	39.186	39.187
			
Gummipude til liftstabilisatorer <i>Rubber pad for lift stabilizers</i> Material: SBR, black Hardness: SH 75 Size: 160 x 120 x 20 mm	Gummipude til liftstabilisatorer <i>Rubber pad for lift stabilizers</i> Material: SBR, black Hardness: SH 75 Size: 160 x 120 x 35 mm	Gummipude til liftstabilisatorer <i>Rubber pad for lift stabilizers</i> Material: SBR, black Hardness: SH 75 Size: 160 x 120 x 120 mm	Gummipude til liftstabilisatorer <i>Rubber pad for lift stabilizers</i> Material: SBR, black Hardness: SH 75 Size: 180 x 60 x 100 mm

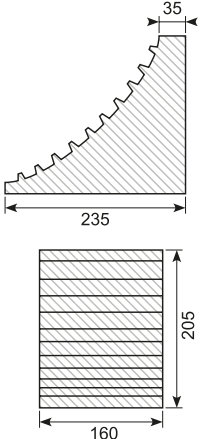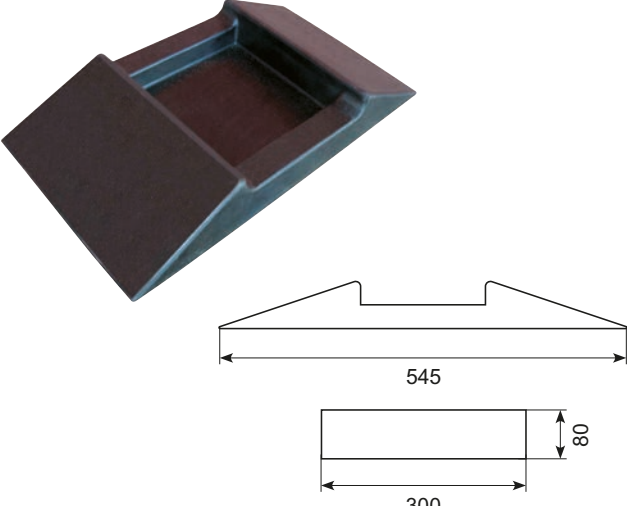39.M24  M24-skive til gummibuffer <i>M24 washer for rubber buffer</i>	52.CWC8  Stopklods <i>Stop block</i>	30.13186-1  PVC profil for dørkarm <i>PVC profile for door sill</i>	30.13186-2  PVC profil for dørkarm <i>PVC profile for door sill</i>
30.13186-3  PVC profil for dørkarm <i>PVC profile for door sill</i>	30.13186-4  PVC profil for dørkarm <i>PVC profile for door sill</i>	30.13186-5  PVC profil for dørkarm <i>PVC profile for door sill</i>	30.13186-6  PVC profil for dørkarm <i>PVC profile for door sill</i>
30.13186-7  PVC profil for dørkarm <i>PVC profile for door sill</i>	30.13186-8  PVC profil for dørkarm <i>PVC profile for door sill</i>	39.645 Stopper for palleløfter <i>Stopper for pallet jack</i> Material: NBR / SBR Weight: 5,8 kg 	

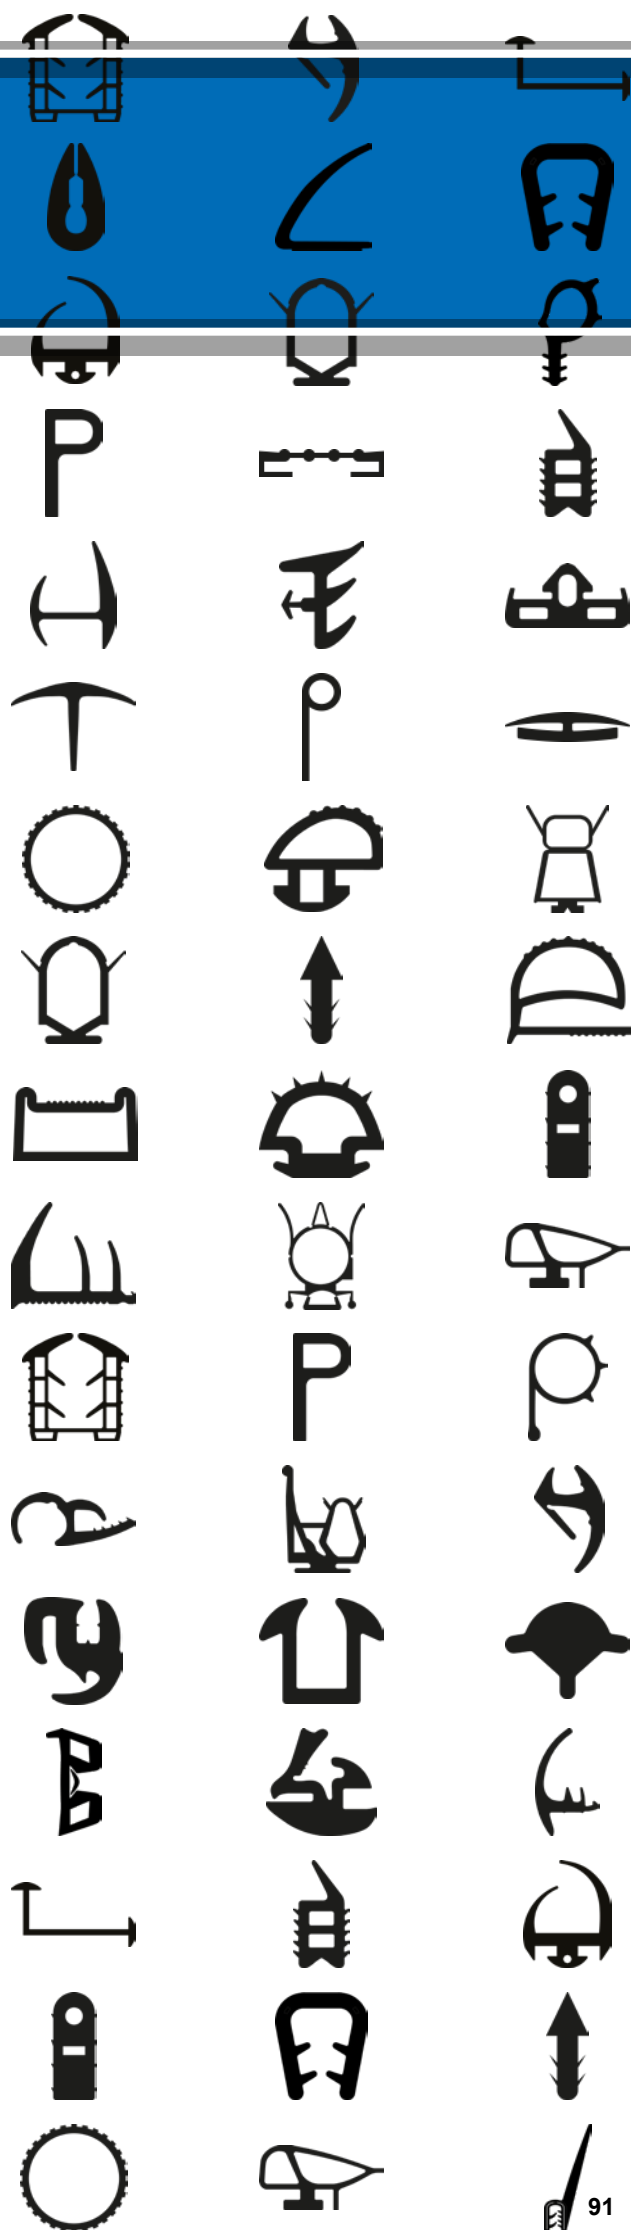
* Skaffevare Special order item

Vibration muffler

In order not to spread the vibrations of a machine to the floor and other environments, it is beneficial to mount the machine on vibration mufflers.

If you want to protect and shield a building, a machine or people from injuries, shocks, noises and loads, you will certainly find the right vibration muffler in our selection.


In addition to the vibration mufflers shown in this catalog, we have a wide selection of rubber feet and vibration dampers with many different sizes and threads.



TYPE M

Flere størrelser kan skaffes på bestilling

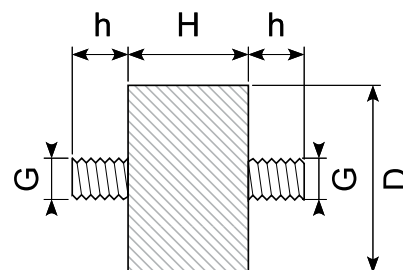More sizes available on request




Varenr. <i>Item no.</i>	Hårdhed <i>Hardness</i>	D	H	h	G	Bemærk <i>Note</i>
39.M9/12-43	SH 43	9	12	8	M4	
39.M10/10	SH 57	10	10	10	M4	
39.M15/15	SH 57	15	15	10	M4	
39.M1810	SH 55	18	10	12	M6	
39.M20/8-M6	SH 55	20	8	18	M6	
39.M20/10-M6	SH 55	20	10	18	M6	
39.M20/10	SH 55	20	10	18	M8	
39.M2015	SH 55	20	15	18	M6	
39.M20/15-A4	SH 55	20	15	18	M6	A4: Rustfri <i>Stainless</i>
39.M2020-M6-45	SH 43	20	20	15	M6	
39.M20/20-A2	SH 55	20	20	18	M6	A2: Rustfri <i>Stainless</i>
39.M2020	SH 55	20	20	18	M6	
39.M2020-M8	SH 55	20	20	18	M8	
39.M25/10-M6ESD	SH 55	25	10	18	M6	ESD
39.M25/10-M8	SH 55	25	10	10	M8	
39.M25/10-M8x10/20	SH 55	25	10	10 / 20	M8	
39.M2515	SH 55	25	15	18	M6	
39.M2515-55	SH 55	25	15	18	M8	
39.M2520-M6	SH 55	25	20	18	M6	
39.M2520	SH 55	25	20	18	M8	
39.M25/22	SH 55	25	22	10	M8	
39.M30/10	SH 55	30	10	23	M8	
39.M3015-M8x15	SH 55	30	15	15	M8	
39.M3015	SH 55	30	15	23	M8	
39.M30/20XX	SH 68	30	20	6 / 12	M8	
39.M3020-55	SH 55	30	20	23	M8	
39.M3020	SH 65	30	20	23	M8	
39.M3030-SS	SH 57	30	30	10	M8	A2: Rustfri <i>Stainless</i>
39.M3030	SH 55	30	30	23	M8	
39.M40/20	SH 55	40	20	23	M8	
39.M4025	SH 55	40	25	23	M8	
39.M4030	SH 55	40	30	23	M8	
39.M4038	SH 55	40	38	23	M8	
39.M40/38-M12	SH 55	40	38	23	M12	
39.M40/40	SH 55	40	40	28	M10	
39.M40/40-A2	SH 55	40	40	28	M10	A2: Rustfri <i>Stainless</i>
39.M40/50-A2	SH 43	40	50	33 / 23	M10	A2: Rustfri <i>Stainless</i>
39.M50/20-M10X	SH 55	50	20	12 / 20	M10	
39.M50/20NBR	SH 55	50	20	33	M10	
39.M5025	SH 55	50	25	28	M10	
39.M50/30-A2	SH 55	50	30	28	M10	
39.M5030	SH 55	50	30	33	M10	
39.M50/30NBR	SH 55	50	30	33	M10	
39.M5040	SH 55	50	40	25	M12	
39.M5045	SH 65	50	45	27	M10	
39.M5050	SH 55	50	50	28	M10	
39.M6035	SH 55	60	35	25	M12	
39.M6050	SH 55	60	50	28	M10	
39.M7540	SH 55	75	40	37	M12	
39.M7550	SH 55	75	50	37	M12	
39.M7560	SH 55	75	60	33	M12	
39.M8050	SH 55	80	50	37	M12	
39.M100/50NBR	SH 55	100	50	41	M16	
39.M100/55-40	SH 40	100	55	42	M14	

TYPE B

Flere størrelser kan
skaffes på bestilling

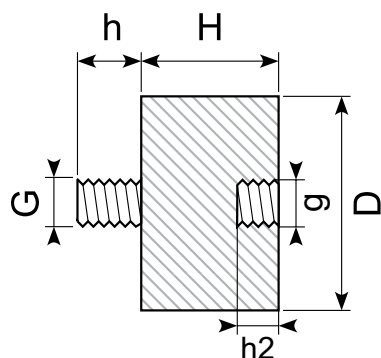*More sizes available on
request*




Varenr. <i>Item no.</i>	Hårdhed <i>Hardness</i>	D	H	h	h2	G	g	Bemærk <i>Note</i>
39.B08/08-43	SH 43	8	8	6	3	M3	M3	
39.B10/10	SH 57	10	10	10	4	M4	M4	
39.B15/10	SH 57	15	10	8	5	M5	M5	
39.B15/15-M4x8	SH 57	15	15	8	4	M4	M4	
39.B15/15-M5x10	SH 60	15	15	10	5	M5	M5	
39.B15/15-R11	SH 60	15	15	10	5	M5	M5	R11
39.B15/15	SH 55	15	15	10	6	M6	M6	
39.B16/18	SH 55	16	18	10	5	M5	M5	
39.B20/10-M6	SH 55	20	10	18	6	M6	M6	
39.B20/10	SH 55	20	10	18	8	M8	M8	
39.B20/15-M6-43	SH 43	20	15	10	6	M6	M6	
39.B20/15-M6	SH 57	20	15	10	6	M6	M6	
39.B20/15-A4	SH 55	20	15	18	6	M6	M6	
39.B20/15	SH 55	20	15	18	8	M8	M8	
39.B20/20-M6-43	SH 43	20	20	10	6	M6	M6	
39.B20/20-M6x15-43	SH 43	20	20	15	6	M6	M6	
39.B20/20-M6	SH 57	20	20	10	6	M6	M6	
39.B2020	SH 55	20	20	18	8	M8	M8	
39.B20/25-M6	SH 55	20	25	18	6	M6	M6	
39.B2513	SH 55	25	13	18	6	M6	M6	
39.B25/25-M6	SH 55	25	25	18	6	M6	M6	
39.B25/25	SH 55	25	25	18	8	M8	M8	
39.B25/30	SH 55	25	30	18	6	M6	M6	
39.B30/20-M6x10-43	SH 43	30	20	10	6	M6	M6	
39.B30/20-M6x10-57	SH 57	30	20	10	6	M6	M6	
39.B30/20XXX	SH 55	30	20	8	8	M8	M8	
39.B30/20XX	SH 68	30	20	12	8	M8	M8	
39.B30/20X	SH 55	30	20	20	8	M8	M8	
39.B30/20	SH 55	30	20	33	8	M8	M8	
39.B30/20NBR	SH 55	30	20	33	8	M8	M8	
39.B30/25-43	SH 43	30	25	15	8	M8	M8	
39.B30/30-M6	SH 55	30	30	20	6	M6	M6	
39.B30/30-M6-M8x23	SH 55	30	30	23	8	M8	M6	
39.B3030	SH 55	30	30	23	8	M8	M8	
39.B30/40	SH 55	30	40	20	8	M8	M8	
39.B40/20	SH 55	40	20	23	8	M8	M8	
39.B40/30-M8x10-43	SH 43	40	30	10	8	M8	M8	
39.B40/30	SH 55	40	30	23	8	M8	M8	
39.B40/35	SH 55	40	35	23	8	M8	M8	
39.B50/20-M8	SH 55	50	20	15	8	M8	M8	
39.B50/25	SH 55	50	25	28	10	M10	M10	
39.B50/30	SH 55	50	30	28	10	M10	M10	
39.B50/40-43	SH 43	50	40	10	10	M10	M10	
39.B50/40	SH 57	50	40	28	10	M10	M10	
39.B50/50-M10	SH 55	50	50	28	10	M10	M10	
39.B50/50	SH 55	50	50	28	12	M12	M12	
39.B60/30	SH 55	60	30	25	12	M12	M12	
39.B60/40	SH 68	60	40	25	12	M12	M12	
39.B60/45-A2	SH 55	60	45	23	12	M12	M12	A2: Rustfri Stainless
39.M60/50	SH 55	60	50	28	10	M10	M10	
39.B75/30	SH 55	75	30	25	12	M12	M12	
39.B75/40-M8x18X	SH 55	75	40	18	8	M8	M8	
39.B75/40-M10x18	SH 55	75	40	18	10	M10	M10	
39.B75/40	SH 55	75	40	25	12	M12	M12	
39.B75/40-M12x40	SH 55	75	40	40	12	M12	M12	
39.B75/50	SH 55	75	50	25	12	M12	M12	
39.B100/30	SH 55	100	30	46	16	M16	M16	
39.B100/40	SH 55	100	40	46	16	M16	M16	
39.B100/50	SH 55	100	50	46	16	M16	M16	
39.B100/75	SH 43	100	75	46	16	M16	M16	
39.B100/75-55	SH 55	100	75	45	16	M16	M16	

TYPE C

Flere størrelser kan
skaffes på bestilling

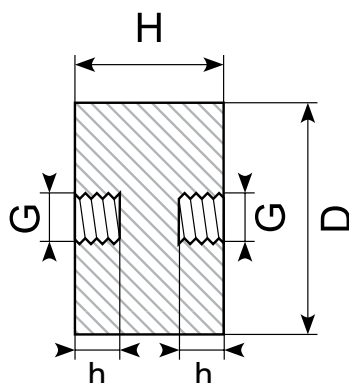*More sizes available on
request*




Varenr. <i>Item no.</i>	Hårdhed <i>Hardness</i>	D	H	h	G	Bemærk <i>Note</i>
39.C20/10	SH 55	20	10	4	M4	
39.C20/15	SH 57	20	15	6	M6	
39.C20/20	SH 55	20	20	6	M6	
39.C20/20-A4	SH 55	20	20	6	M6	A4: Syrefast <i>Acid proof</i>
39.C20/25-VMQ	SH 55	20	25	4	M4	Transparent silikone, A4: Syrefast <i>Acid proof</i>
39.C25/10	SH 55	25	10	4	M4	
39.C25/15	SH 55	25	15	6	M6	
39.C25/15-A2	SH 55	25	15	6	M6	A2: Rustfri <i>Stainless</i>
39.C25/25	SH 55	25	25	6	M6	
39.C25/25-M8	SH 55	25	25	8	M8	
39.C30/15	SH 55	30	15	8	M8	Åben indsats <i>Open insert</i>
39.C30/20	SH 55	30	20	8	M8	
39.C30/22	SH 55	30	22	8	M8	
39.C30/30-A4	SH 57	30	30	8	M8	A4: Syrefast <i>Acid proof</i>
39.C30/30	SH 65	30	30	8	M8	
39.C30/40	SH 55	30	40	8	M8	
39.C40/20	SH 55	40	20	8	M8	
39.C40/25	SH 55	40	25	8	M8	
39.C40/30	SH 55	40	30	8	M8	
39.C40/40	SH 55	40	40	8	M8	
39.C40/40-M10	SH 55	40	40	10	M10	
39.C40/50	SH 55	40	50	8	M8	
39.C40/50-68	SH 68	40	50	8	M8	
39.C50/20	SH 55	50	20	10	M10	
39.C50/25	SH 55	50	25	10	M10	
39.C50/30-M8	SH 55	50	30	8	M8	
39.C50/30	SH 55	50	30	10	M10	
39.C50/30-A2	SH 57	50	30	10	M10	A2: Rustfri <i>Stainless</i>
39.C50/30-68	SH 68	50	30	10	M10	
39.C50/35-43	SH 43	50	35	10	M10	
39.C50/35	SH 55	50	35	10	M10	
39.C50/40	SH 55	50	40	10	M10	
39.C50/40-M12	SH 55	50	40	12	M12	
39.C50/45	SH 55	50	45	10	M10	
39.C50/50	SH 57	50	50	10	M10	
39.C60/30-M8	SH 55	60	30	8	M8	
39.C60/30	SH 55	60	30	10	M10	
39.C60/40-M10	SH 43	60	40	10	M10	
39.C60/40-M12	SH 43	60	40	12	M12	
39.C60/40	SH 65	60	40	12	M12	
39.C60/45	SH 65	60	45	10	M10	
39.C65/35-M10	SH 55	65	35	10	M10	
39.C65/35	SH 55	65	35	12	M12	
39.C70/45-M10	SH 55	70	45	10	M10	
39.C70/50-A2	SH 55	70	50	12	M12	A2: Rustfri <i>Stainless</i>
39.C75/30-M10	SH 55	75	30	10	M10	
39.C75/30-M10-68	SH 68	75	30	10	M10	
39.C75/30	SH 55	75	30	12	M12	
39.C75/50	SH 57	75	50	12	M12	
39.C75/55-M10	SH 55	75	55	10	M10	
39.C75/55-43A	SH 43	75	55	12	M12	
39.C75/55	SH 55	75	55	12	M12	
39.C100/40	SH 65	100	40	16	M16	
39.C100/50	SH 55	100	50	16	M16	
39.C100/55NBR68	SH 68	100	55	16	M16	
39.C100/60-M12	SH 55	100	60	12	M12	
39.C100/75	SH 55	100	75	16	M16	
39.C150/40	SH 65	150	40	16	M16	
39.C150/75-M20	SH 55	150	75	20	M20	
39.C200/100	SH 55	200	100	20	M20	

TYPE D

Flere størrelser kan skaffes på bestilling

More sizes available on request




Varenr. <i>Item no.</i>	Hårdhed <i>Hardness</i>	D	H	h	G	Bemærk <i>Note</i>
39.D8/5	SH 55	8	5	6	M4	
39.D10/10	SH 55	10	10	10	M5	
39.D10/10-A2	SH 55	10	10	10	M5	A2: Rustfri <i>Stainless</i>
39.D13/13-M8x35	SH 68	13	13	38	M8	
39.D15/4G-M4x6	SH 68	15	4	6	M4	Grå <i>Grey</i> - RAL 7035
39.D15/10	SH 55	15	10	15	M5	
39.D15/10-M6	SH 55	15	10	18	M6	
39.D15/15	SH 55	15	15	15	M5	
39.D15/15-M6	SH 55	15	15	15	M6	
39.20/8-M8	SH 55	20	8	8	M8	
39.D20/10	SH 55	20	10	18	M6	
39.D20/10-A4	SH 55	20	10	18	M6	A4: Syrefast <i>Acid proof</i>
39.20/15-M5	SH 57	20	15	8	M5	
39.D20/15E	SH 55	20	15	15	M6	
39.D20/20	SH 55	20	20	15	M5	
39.D20/20-M6x43	SH 43	20	20	15	M6	
39.D20/20-M6	SH 55	20	20	18	M6	
39.D25/15	SH 55	25	15	18	M6	
39.D25/15-A2	SH 68	25	15	18	M6	A2: Rustfri <i>Stainless</i>
39.D25/18	SH 55	25	18	20	M8	
39.D30/8-M6GX	SH 55	30	8	15	M6	Grå <i>Grey</i> - RAL 7035
39.D30/8-M6x18	SH 55	30	8	18	M6	
39.D30/8-M6x23	SH 55	30	8	23	M6	
39.D30/8-M6G	SH 55	30	8	28	M6	Grå <i>Grey</i> - RAL 7035
39.D30/10-M6x15	SH 55	30	10	15	M6	
39.D30/10-M6	SH 55	30	10	18	M6	
39.D30/10-M6x28	SH 55	30	10	28	M6	
39.D30/10	SH 55	30	10	20	M8	
39.D30/10-A2	SH 55	30	10	20	M8	A2: Rustfri <i>Stainless</i>
39.D30/12-M6G	SH 55	30	12	23	M6	Grå <i>Grey</i> - RAL 7035
39.D30/15-M6	SH 55	30	15	18	M6	
39.D30/15-M6G	SH 55	30	15	23	M6	Grå <i>Grey</i> - RAL 7035
39.D30/15	SH 55	30	15	20	M8	
39.D30/15-M8x23	SH 55	30	15	23	M8	
39.D30/15-M10x25	SH 55	30	15	25	M10	
39.D30/15-M10x50	SH 55	30	15	50	M10	
39.D30/18-M10	SH 55	30	18	18	M10	
39.D30/20-M6-43	SH 43	30	20	18	M6	
39.D30/20-M6	SH 55	30	20	20	M6	
39.D30/20-M8x15	SH 55	30	20	15	M8	
39.D30/20	SH 55	30	20	20	M8	
39.D30/30-M6	SH 55	30	30	18	M6	
39.D30/30	SH 55	30	30	20	M8	
39.D40/15-M6	SH 55	40	15	18	M6	
39.D40/15	SH 55	40	15	20	M8	
39.D40/20-M6-43	SH 43	40	20	18	M6	
39.D40/20-M6	SH 55	40	20	18	M6	
39.D40/20	SH 55	40	20	18	M8	
39.D40/20-M10	SH 55	40	20	20	M10	
39.D40/20-A2	SH 55	40	20	20	M10	A2: Rustfri <i>Stainless</i>
39.D40/25-A2-S	SH 60	40	25	30	M8	A2: Rustfri <i>Stainless</i> Silikone, FDA conform Blå <i>Blue</i> - RAL 5002
39.D40/25-A2	SH 55	40	25	20	M10	A2: Rustfri <i>Stainless</i>

TYPE D

Flere størrelser kan skaffes på bestilling

More sizes available on request





Varenr. <i>Item no.</i>	Hårdhed <i>Hardness</i>	D	H	h	G	Bemærk <i>Note</i>
39.D40/30-M8	SH 55	40	30	18	M8	
39.D40/30-M8x23	SH 55	40	30	23	M8	
39.D40/30-A2	SH 55	40	30	20	M10	A2: Rustfri <i>Stainless</i>
39.D40/30	SH 55	40	30	23	M10	
39.D40/35-M8-A2	SH 55	40	35	20	M8	A2: Rustfri <i>Stainless</i>
39.D40/35	SH 55	40	35	20	M10	
39.D40/35-A2	SH 55	40	35	20	M10	A2: Rustfri <i>Stainless</i>
39.D40/38	SH 55	40	38	25	M8	
39.D40/40-M8x23-68	SH 68	40	40	23	M8	
39.D40/40	SH 55	40	40	20	M10	
39.D40/40-A2	SH 55	40	40	20	M10	A2: Rustfri <i>Stainless</i>
39.D40/45-A2	SH 55	40	45	20	M10	
39.D50/20-M10x15	SH 70	50	20	15	M10	
39.D50/20	SH 70	50	20	28	M10	
39.D50/20-M12	SH 55	50	20	23	M12	
39.D50/25	SH 55	50	25	20	M10	
39.D50/25-M12	SH 55	50	25	23	M12	
39.D50/30-M10	SH 55	50	30	20	M10	
39.D50/30-M10-A2	SH 55	50	30	28	M10	A2: Rustfri <i>Stainless</i>
39.D50/30-M10x38	SH 55	50	30	38	M10	
39.D50/30	SH 55	50	30	20	M12	
39.D50/40-43	SH 43	50	40	10	M10	
39.D50/40	SH 55	50	40	20	M10	
39.D50/40NBR	SH 55	50	40	20	M10	NBR
39.D50/50	SH 55	50	50	20	M10	
39.D50/60	SH 55	50	60	28	M10	
39.D50/80	SH 55	50	80	28	M10	
39.D60/30	SH 55	60	30	28	M10	
39.D60/30-M12	SH 55	60	30	23	M12	
39.D60/40	SH 55	60	40	28	M10	
39.D60/40M12	SH 55	60	40	23	M12	
39.D60/50	SH 55	60	50	28	M10	
39.D65/35	SH 55	65	35	20	M12	
39.D70/40	SH 55	70	40	28	M10	
39.D70/40-M12	SH 55	70	40	27	M12	
39.D70/45-M10x12	SH 55	70	45	12	M10	
39.D75/40-68	SH 68	75	40	30	M12	
39.D75/50-M10	SH 55	75	50	28	M10	
39.D75/50-M10/sh68	SH 68	75	50	28	M10	
39.D75/50-M12	SH 55	75	50	20	M12	
39.D100/30	SH 55	100	30	41	M16	
39.D100/50	SH 55	100	50	41	M16	
39.D100/75	SH 55	100	75	41	M16	
39.D150/50	SH 55	150	50	41	M16	

TYPE E


Flere størrelser kan
skaffes på bestilling

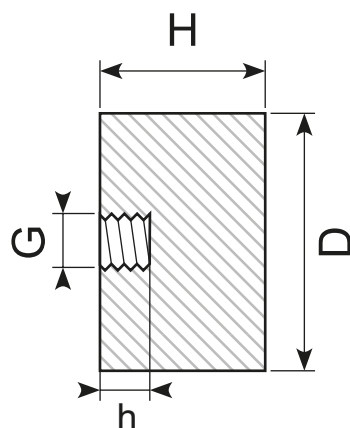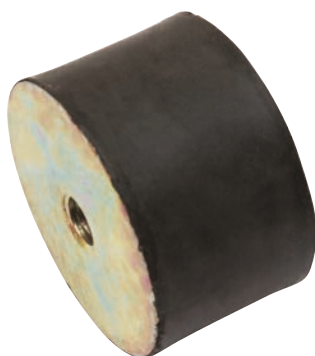More sizes available on
request




Varenr. <i>Item no.</i>	Hårdhed <i>Hardness</i>	D	H	h	G	Bemærk <i>Note</i>
39.E20/10-M6	SH 55	20	10	6	M6	
39.E20/10	SH 55	20	10	8	M8	
39.E20/25-68	SH 68	20	25	6	M6	
39.E25/10-M6	SH 55	25	10	6	M6	
39.E25/10	SH 55	25	10	8	M8	
39.E25/25	SH 57	25	25	6	M6	
39.E25/25-68	SH 68	25	25	6	M6	
39.E30/10-M6-43	SH 43	30	10	6	M6	
39.E30/10-M6G	SH 55	30	10	6	M6	Grå Grey - RAL 7035
39.E30/15-M6	SH 55	30	15	6	M6	
39.E30/15-M6G	SH 55	30	15	6	M6	Grå Grey - RAL 7035
39.E30/15	SH 55	30	15	8	M8	
39.30/17	SH 55	30	17	8	M8	
39.E30/20-M6	SH 55	30	20	6	M6	
39.E30/20	SH 55	30	20	8	M8	
39.E30/25	SH 55	30	25	8	M8	
39.E30/30-M6	SH 55	30	30	6	M6	
39.E30/30	SH 55	30	30	8	M8	
39.E30/35	SH 55	30	35	8	M8	
39.E40/15-SH.43	SH 43	40	15	8	M8	
39.E40/20-M6	SH 55	40	20	6	M6	
39.E40/20	SH 55	40	20	8	M8	
39.E40/20NBR	SH 57	40	20	8	M8	NBR
39.E40/30-M6	SH 55	40	30	6	M6	
39.E40/30	SH 55	40	30	8	M8	
39.E50/20	SH 55	50	20	8	M8	
39.E50/20-M10	SH 55	50	20	10	M10	
39.E50/20-M12	SH 55	50	20	12	M12	
39.E50/25	SH 55	50	25	10	M10	
39.E50/25-M12	SH 55	50	25	12	M12	
39.E50/40	SH 55	50	40	10	M10	
39.E50/40-M12	SH 55	50	40	12	M12	
39.E60/30	SH 55	60	30	10	M10	
39.E60/30-M12	SH 55	60	30	12	M12	
39.E60/40	SH 55	60	40	10	M10	
39.E60/40-M12	SH 55	60	40	12	M12	
39.E70/35	SH 55	70	35	12	M12	
39.E70/50	SH 55	70	50	12	M12	
39.E75/30	SH 55	75	30	10	M10	
39.E75/30-M12	SH 55	75	30	12	M12	
39.E75/45-M12	SH 55	75	45	12	M12	
39.E75/50	SH 55	75	50	10	M10	
39.E75/50-M12	SH 55	75	50	12	M12	
39.E80/50	SH 55	80	50	12	M12	
39.E80/50-M16	SH 55	80	50	16	M16	
39.E100/25	SH 55	100	25	16	M16	
39.E100/30	SH 55	100	30	16	M16	
39.E100/40NBR43	SH 43	100	40	16	M16	
39.E100/40	SH 55	100	40	16	M16	
39.E100/40NBR	SH 55	100	40	16	M16	NBR
39.E100/40NBR68	SH 68	100	40	16	M16	NBR
39.E100/50	SH 55	100	50	16	M16	
39.E100/55NBR68	SH 68	100	55	16	M16	
39.E100/75	SH 55	100	75	16	M16	
39.E150/50	SH 55	150	50	16	M16	
39.E150/50-M20	SH 55	150	50	20	M20	
39.E150/75-M20	SH 55	150	75	20	M20	

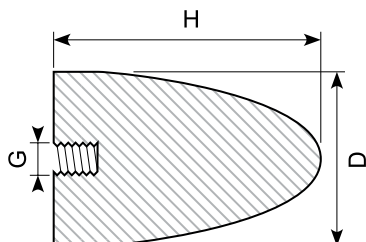Model KP-E




Model: KP-E Varenr. <i>Item no.</i>	D/H	D	H	G
39.KP-E10/10	10/10	10	10	M5
39.KP-E15/22 *	15/22	15	22	M6
39.KP-E20/15 *	20/15	20	15	M6
39.KP-E20/24	20/24	20	24	M6
39.KP-E25/16	25/16	25	16	M6
39.KP-E25/20 *	25/20	25	20	M6
39.KP-E30/30 *	30/30	30	30	M8
39.KP-E30/36	30/36	30	36	M8
39.KP-E35/40 *	35/40	35	40	M8
39.KP-E50/50 *	50/50	50	50	M10
39.KP-E50/61 *	50/61	50	61	M8
39.KP-E50/67 *	50/67	50	67	M8
39.KP-E50/68	50/68	50	68	M10
39.KP-E60/40	60/40	60	40	M10
39.KP-E70/58 *	70/58	70	58	M12
39.KP-E70/60 *	70/60	70	60	M12
39.KP-E75/89	75/89	75	89	M12
39.KP-E75/89-M10 *	75/89	75	89	M10
39.KP-E95/80 *	95/80	95	80	M16
39.KP-E115/136 *	115/136	115	136	M16
39.KP-E118/77 *	118/77	118	77	M16

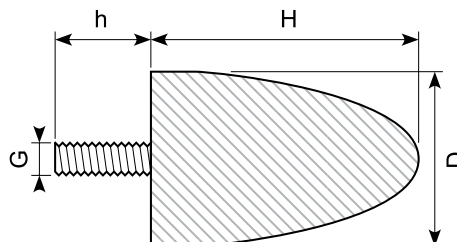
Model KP-D



Model: KP-D Varenr. <i>Item no.</i>	D/H	D	H	G	h
39.KP-D10/10	10/10	10	10	M5	12
39.KP-D15/22	15/22	15	22	M6	18
39.KP-D20/15	20/15	20	15	M6	10
39.AV2024	20/24	20	24	M6	18
39.KP-D25/16	25/16	25	16	M6	18
39.KD25/17 *	25/17	25	17	M6	8
39.KP-D25/20	25/20	25	20	M6	18
39.KP-D30/30	30/30	30	30	M8	20
39.KP-D30/36 *	30/36	30	36	M8	20
39.KP-D30/36-A2 *	30/36	30	36	M12	37
39.KP-D30/36-A4 *	30/36	30	36	M12	37
39.AV30	30/40	30	40	M8	23
39.KD50/18 *	50/18	50	18	M10	18
39.KP-D50/50 *	50/50	50	50	M10	28
39.KP-D50/58	50/58	50	58	M10	28
39.KP-D50/61	50/61	50	61	M8	28
39.KP-D50/67	50/67	50	67	M8	33
39.AV5068	50/68	50	68	M10	38
39.KP-D60/40	60/40	60	40	M10	28
39.KP-D70/58 *	70/58	70	58	M12	32
39.KP-D70/60 *	70/60	70	60	M12	37
39.KP-D75/89	75/89	75	89	M12	37
39.KP-D75/89-10 *	75/89	75	89	M10	37
39.AV9580	95/80	95	80	M16	41
39.KP-D115/136 *	115/136	115	136	M16	41
39.KP-D118/77 *	118/77	118	77	M16	41

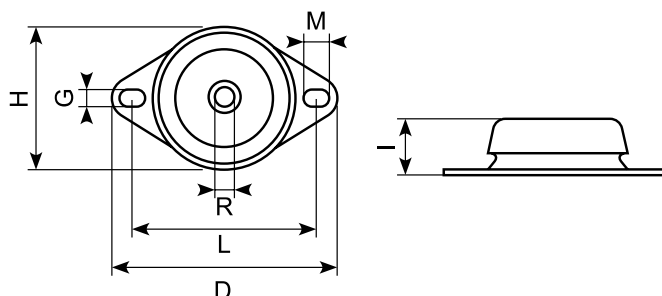


Varenr. <i>Item no.</i>	I	H	G	M	R	L	D	Belastning <i>Load</i>
39.GMF67/34-SH.40	34	67	11	12	M12	88	110	30-40 kg
39.GMF67/34	34	67	11	12	M12	88	110	60 kg
39.GMF75/34	34	75	12	16	M12	100	130	100 kg
39.GMF100/42	42	100	12	16	M12	120	153	200-300 kg
39.GMF108/46	46	108	14	18	M12	142	177	400-500 kg
39.GMF122/50	50	122	14	20	M16	158	192	600-800 kg
39.GMF150/54	54	150	14	18	M18	183	218	1000-1200 kg

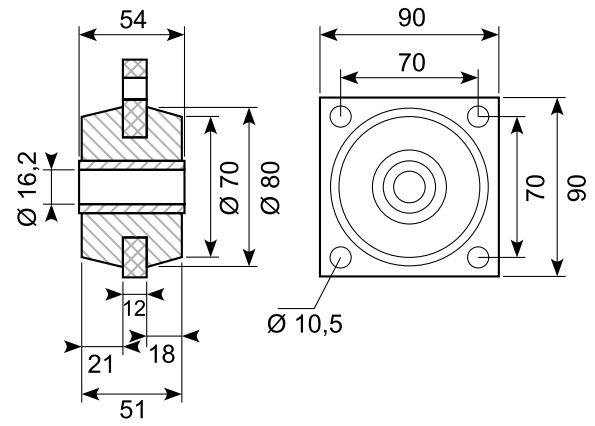Gummiophæng *Rubber suspension***Material:** NR/SBR**Hardness:** SH 55

Fenders

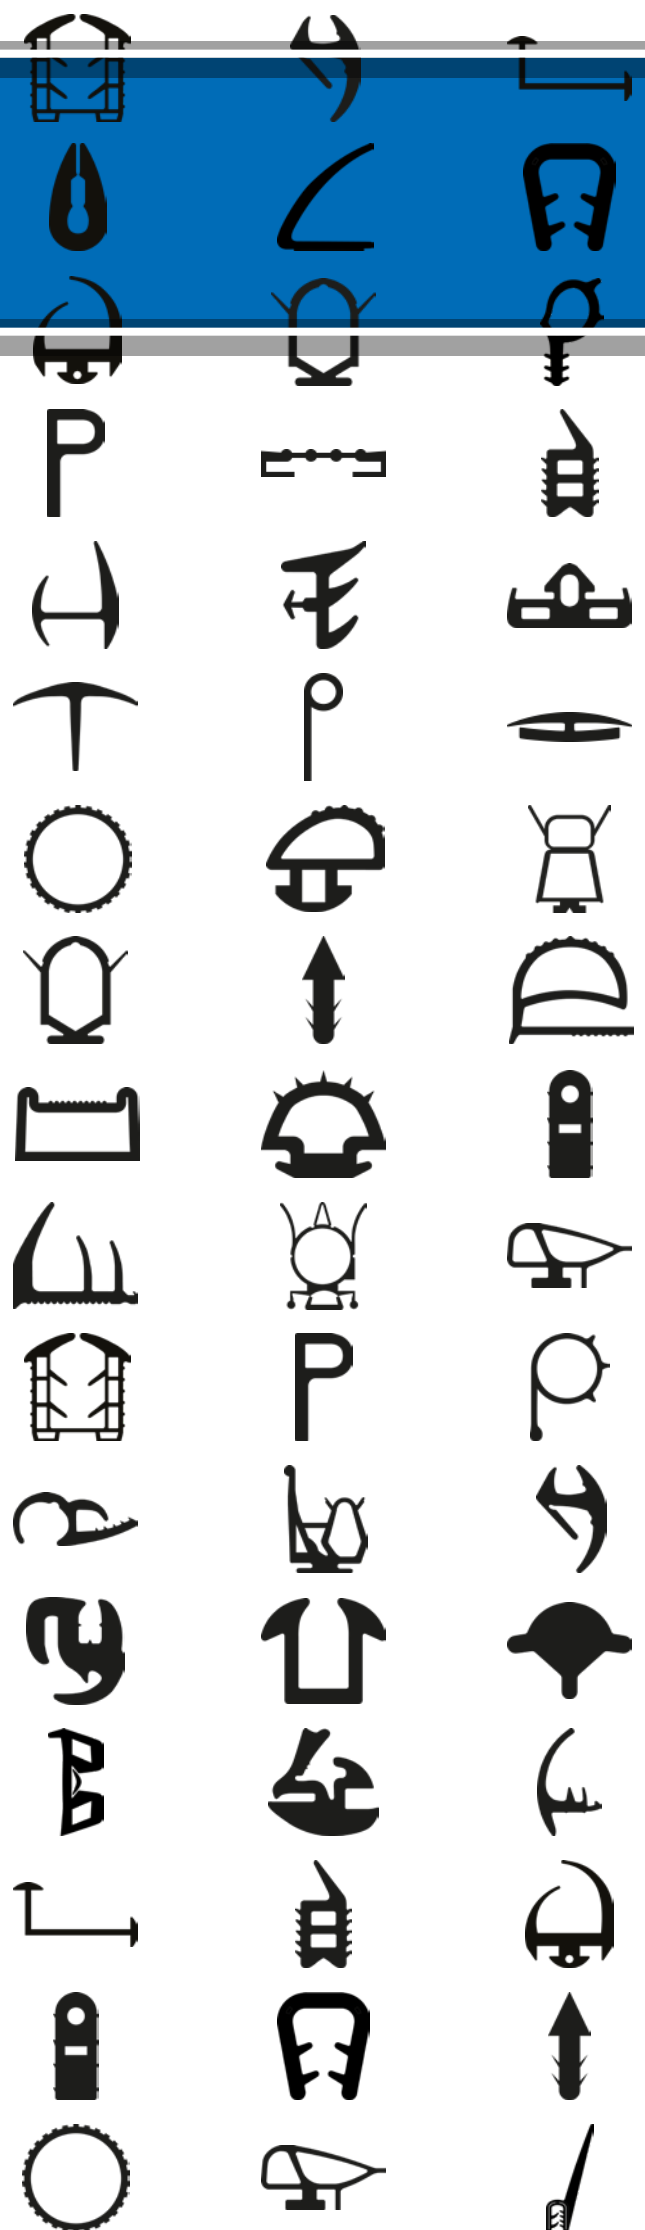Fenders are shock-absorbing rubber items commonly used for boats, in harbors, forklifts and trucks. Fenders can be found everywhere in the transport and logistics world. Available in EPDM and NR / SBR. However, we can also order them in other materials.




Fendere til f.eks. havne og læsseramper

Fenders for e.g. harbours and loading ramps

Material: EPDM, sort *black*

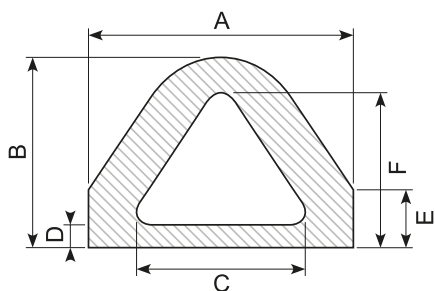Hardness: SH 70




Varenr. <i>Item no.</i>	A	B	C	D	E	F	Kg/m
39.3872	40 mm	25 mm	28 mm	5 mm	10 mm	20 mm	0,6
39.3873 *	55 mm	40 mm	38 mm	8 mm	15 mm	32 mm	1,4
39.3875 *	60 mm	50 mm	40 mm	10 mm	20 mm	42 mm	1,8
39.4087 *	60 mm	52 mm	30 mm	11 mm	11 mm	43 mm	2
39.3876	80 mm	65 mm	50 mm	12 mm	25 mm	39 mm	3,2
39.3887 *	80 mm	70 mm	40 mm	15 mm	0 mm	68 mm	3,5
39.4333 *	80 mm	70 mm	54 mm	15 mm	16 mm	59 mm	4
39.2486 *	82 mm	67 mm	42 mm	15 mm	15 mm	57 mm	3,5
39.4156 *	109 mm	117 mm	50 mm	42 mm	50 mm	95 mm	10,5
39.3846 *	110 mm	95 mm	50 mm	22 mm	18 mm	76 mm	6,1
39.3874 *	110 mm	95 mm	70 mm	15 mm	30 mm	80 mm	5,8
39.4399 *	110 mm	130 mm	70 mm	20 mm	45 mm	110 mm	7,8
39.3010 *	120 mm	110 mm	70 mm	14 mm	35 mm	95 mm	7,4
39.3868 *	150 mm	130 mm	100 mm	20 mm	40 mm	110 mm	10,8
39.4178 *	150 mm	160 mm	105 mm	50 mm	60 mm	130 mm	16,3
39.3722 *	160 mm	138 mm	92 mm	33 mm	0 mm	105 mm	15,8
39.3240 *	170 mm	130 mm	110 mm	15 mm	45 mm	110 mm	10,5

Fendere til f.eks. varevogne, havne og læsseramper

Fenders for e.g. vans, harbours and loading ramps

Material: EPDM

Hardness: SH 70




Varenr. <i>Item no.</i>	B	H	b	h	L	Kg/m	Farve <i>Colour</i>	Min. order
39.674	40 mm	22 mm			20 m	0,7	Sort <i>Black</i>	
39.678	60 mm	50 mm	27 mm	28 mm	10 m	2,1	Sort <i>Black</i>	
39.678X *	50 mm	60 mm			20 m	2,1	Sort <i>Black</i>	
39.680X	84 mm	70 mm	46 mm	41 mm	20 m	3,7	Sort <i>Black</i>	
39.684X	110 mm	95 mm			10 m	7	Sort <i>Black</i>	
39.684XS * Soft - SH 45							Sort <i>Black</i>	40 m
39.685 *	120 mm	120 mm			3 m	11,2	Sort <i>Black</i>	
39.680H *							Hvid <i>White</i>	100 m
39.680H-1180	84 mm	70 mm			1,18 m		Hvid <i>White</i>	

39.4380X	39.3803X	39.3904X
Material: NR / SBR Length: 2 m	Material: NR / SBR Length: 2 m	Material: NR / SBR Length: 2 m


* Skaffevare Special order item

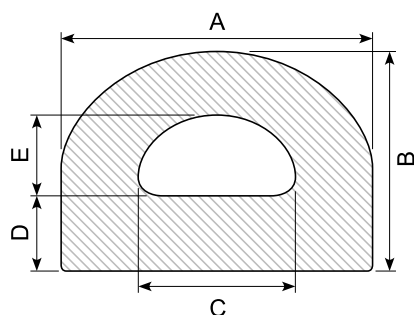Fendere til f.eks. havne og læsseramper
Fenders for e.g. harbours and loading ramps
Material: EPDM, sort *black*
Hardness: SH 70




Varenr. <i>Item no.</i>	A	B	C	D	E	Kg/m
39.3581	30 mm	25 mm	11 mm	7,5 mm	11 mm	0,67
39.36412 *	40 mm	75 mm	23 mm	32 mm	23 mm	3,76
39.2776 *	51 mm	45 mm	20 mm	10 mm	20 mm	2,08
39.3428 *	65 mm	70 mm	35 mm	18 mm	28 mm	2,99
39.4229 *	80 mm	70 mm	46 mm	25 mm	20 mm	4,57
39.3700 *	80 mm	78 mm	56 mm	12 mm	54 mm	3,55
39.3029 *	80 mm	80 mm	40 mm	25 mm	35 mm	5,54
39.3925 *	80 mm	80 mm	40 mm	23 mm	40 mm	5,59
39.4110 *	95 mm	100 mm	38 mm	30 mm	45 mm	5,4
39.4251 *	100 mm	60 mm	50 mm	20 mm	20 mm	5,81
39.3051 *	100 mm	80 mm	50 mm	25 mm	30 mm	7,05
39.3802	100 mm	80 mm	80 mm	12 mm	56 mm	3,68
39.3923 *	100 mm	95 mm	44 mm	29 mm	40 mm	8,1
39.3952 *	100 mm	95 mm	60 mm	20 mm	50 mm	6,99
39.4403 *	100 mm	95 mm	60 mm	28 mm	42 mm	6,27
39.4310 *	107 mm	67 mm	40 mm	22 mm	20 mm	6,4
39.3726 *	110 mm	110 mm	50 mm	30 mm	25 mm	12,14
39.3878 *	120 mm	70 mm	30 mm	20 mm	30 mm	6,41
39.93 *	120 mm	120 mm	70 mm	44 mm	51 mm	11,84
39.4381 *	125 mm	100 mm	65 mm	33 mm	37 mm	10,87
39.4257 *	130 mm	145 mm	40 mm	55 mm	40 mm	17,24
39.69 *	130 mm	150 mm	50 mm	50 mm	50 mm	21,05
39.3815 *	140 mm	80 mm	60 mm	20 mm	36 mm	10,27
39.3813 *	140 mm	125 mm	85 mm	35 mm	55 mm	14,75
39.4129 *	150 mm	130 mm	50 mm	55 mm	50 mm	20
39.4380 *	150 mm	150 mm	80 mm	40 mm	75 mm	18,22
39.3381 *	150 mm	150 mm	85 mm	30 mm	85 mm	18,81
39.4224 *	150 mm	150 mm	92 mm	29 mm	92 mm	14,7
39.4244 *	150 mm	180 mm	45 mm	87 mm	40 mm	27,8
39.3366 *	160 mm	125 mm	90 mm	25 mm	65 mm	15,82
39.4311 *	160 mm	175 mm	68 mm	79 mm	68 mm	17,1
39.3023 *	190 mm	195 mm	21 mm	89 mm	21 mm	40,57
39.4012 *	190 mm	195 mm	55 mm	89 mm	55 mm	37,7
39.3803 *	200 mm	150 mm	148 mm	14 mm	113 mm	11,81
39.57 *	200 mm	165 mm	40,5 mm	80 mm	40,5 mm	31,44
39.4269 *	200 mm	220 mm	75 mm	82 mm	75 mm	36,85
39.4249 *	200 mm	220 mm	75 mm	82 mm	75 mm	42,39
39.4250 *	200 mm	220 mm	100 mm	38 mm	80 mm	39,38
39.3849 *	240 mm	260 mm	110 mm	90 mm	110 mm	54,54
39.56 *	250 mm	200 mm	136 mm	50 mm	100 mm	39,84
39.3879 *	250 mm	290 mm	120 mm	60 mm	110 mm	48,96
39.4054 *	280 mm	190 mm	180 mm	50 mm	90 mm	38,5
39.79 *	300 mm	254 mm	150 mm	75 mm	104 mm	68,25
39.55 *	350 mm	350 mm	220 mm	80 mm	165 mm	97,68

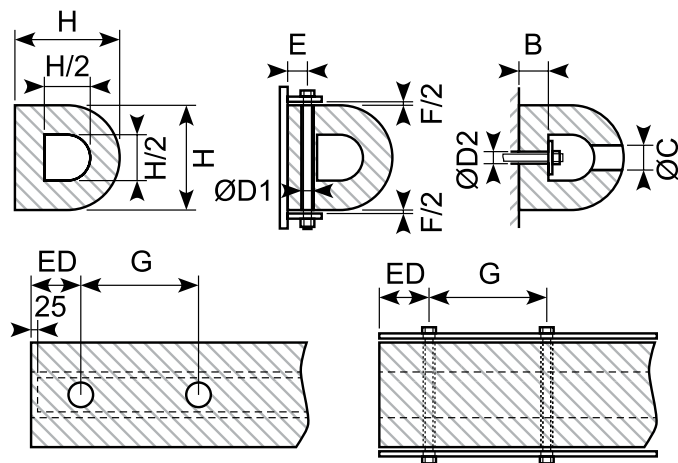DD-fender



Varenr. <i>Item no.</i>	H mm	B mm	C mm	D1 mm	D2 mm	E mm	F mm	G mm	ED mm	Flad bar <i>Flat bar</i> mm	Ankre <i>Anchors</i>	Vægt <i>Weight</i> kg/m
<i>*</i>	100 x 100	25	30	18	24	25	10	200-300	90-130	40 x 5	M12	8,3
39.DD150150 <i>*</i>	150 x 150	37,5	40	24	32	30	12	250-350	110-150	50 x 8	M16	18
<i>*</i>	200 x 200	50	50	30	40	45	15	300-400	130-180	70 x 8	M20	32
<i>*</i>	250 x 250	62,5	60	36	48	50	20	350-450	140-200	90 x 12	M24	50
39.DD300300 <i>*</i>	300 x 300	75	60	36	48	60	25	350-450	140-200	100 x 12	M24	72
39.DD350350 <i>*</i>	350 x 350	87,5	75	45	60	70	25	350-450	140-200	130 x 15	M30	103,6
<i>*</i>	380 x 380	95	75	45	60	80	30	350-450	140-200	140 x 15	M30	122,1
<i>*</i>	400 x 400	100	75	45	60	80	30	350-450	140-200	150 x 15	M30	128
<i>*</i>	500 x 500	125	90	54	72	90	40	400-500	160-230	180 x 20	M36	200

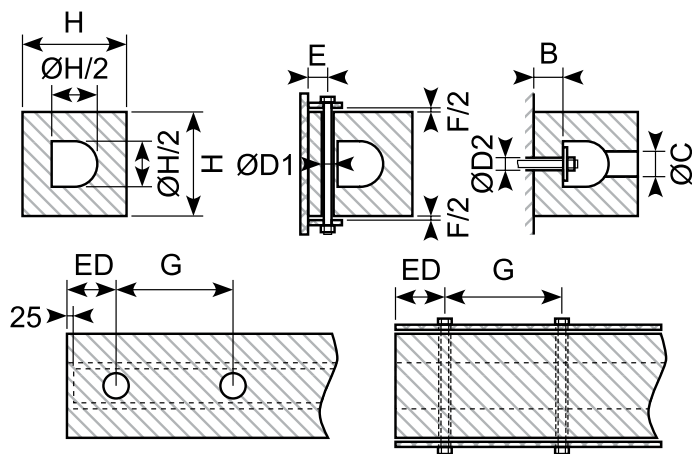
SD-fender



Varenr. <i>Item no.</i>	H mm	B mm	C mm	D1 mm	D2 mm	E mm	F mm	G mm	ED mm	Flad bar <i>Flat bar</i> mm	Ankre <i>Anchors</i>	Vægt <i>Weight</i> kg/m
*	100 x 100	25	30	18	24	25	10	200-300	90-130	40 x 5	M12	9,5
*	150 x 150	37,5	40	24	32	30	12	250-350	110-150	50 x 8	M16	22,1
*	200 x 200	50	50	30	40	45	15	300-400	130-180	70 x 10	M20	38,7
39.SD300250 *	300 x 250	62,5	60	36	48	50	20	350-450	140-200	90 x 12	M24	59,3
39.SD300300 *	300 x 300	75	60	36	48	60	25	350-450	140-200	100 x 12	M24	85
*	350 x 350	87,5	75	45	60	70	25	350-450	140-200	130 x 15	M30	116
*	400 x 400	100	75	45	60	80	30	350-450	140-200	150 x 15	M30	148,5
*	500 x 500	125	90	54	72	90	40	400-500	160-230	180 x 20	M36	232,1


* Skaffevare Special order item

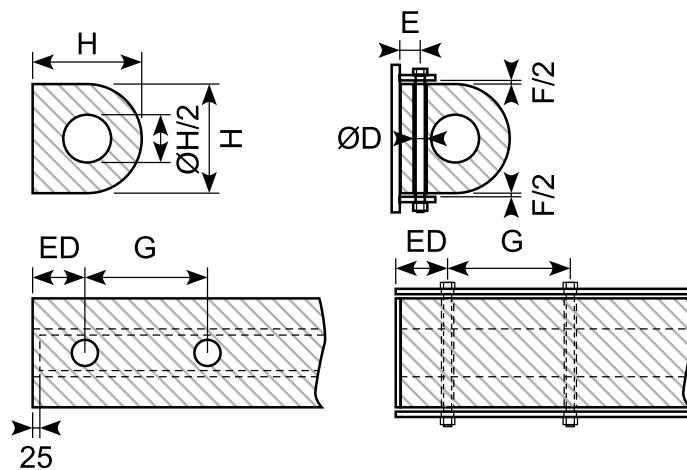DC-fender










Varenr. <i>Item no.</i>	H mm	D2 mm	E mm	F mm	G mm	ED mm	Ankre <i>Anchors</i>	Vægt <i>Weight</i> kg/m
* 100 x 100	100	18	25	10	200-300	90-130	M12	9,9
* 150 x 150	150	24	30	12	250-350	110-150	M16	20
* 200 x 200	200	30	45	15	300-400	130-180	M20	37,4
* 250 x 250	250	36	50	20	350-450	140-200	M24	57,2
39.DC300300 * 300 x 300	300	36	60	25	350-450	140-200	M24	81,3
* 350 x 350	350	45	70	25	350-450	140-200	M30	109,5
* 400 x 400	400	45	80	30	350-450	140-200	M30	142
* 500 x 500	500	54	90	40	400-500	150-230	M36	208

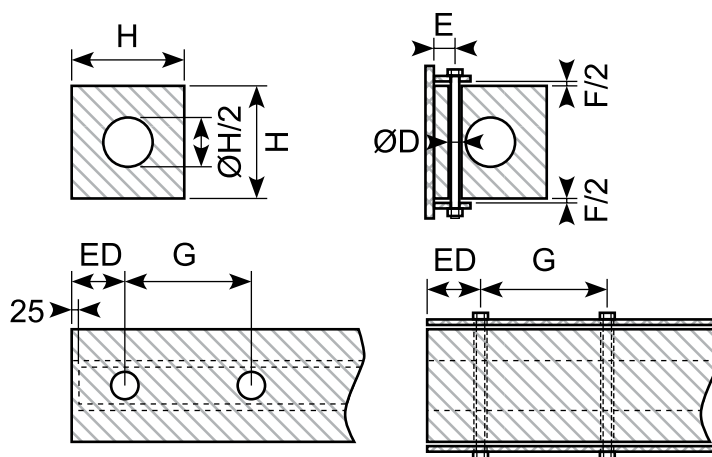SC-fender



Varenr. <i>Item no.</i>	H mm	D2 mm	E mm	F mm	G mm	ED mm	Ankre <i>Anchors</i>	Vægt <i>Weight</i> kg/m
* 100 x 100	100	18	25	10	200-300	90-130	M12	11,1
* 150 x 150	150	24	30	12	250-350	110-150	M16	22,9
* 200 x 200	200	30	45	15	300-400	130-180	M20	42,6
* 250 x 250	250	36	50	20	350-450	140-200	M24	65,3
39.SC300300 * 300 x 300	300	36	60	25	350-450	140-200	M24	92,9
* 350 x 350	350	45	70	25	350-450	140-200	M30	117,6
* 400 x 400	400	45	80	30	350-450	140-200	M30	153,6
* 500 x 500	500	54	90	40	400-500	150-230	M36	240,1

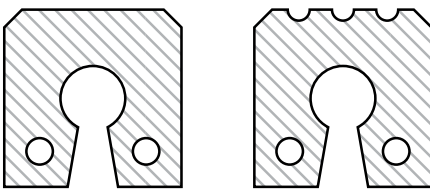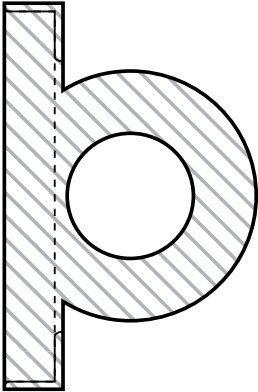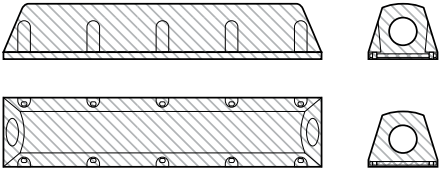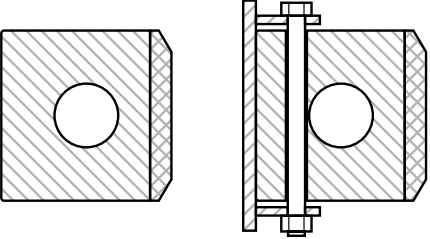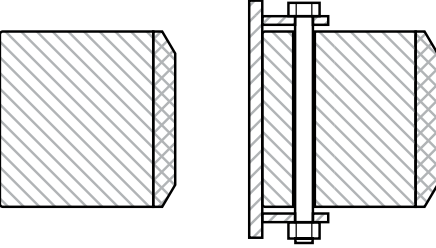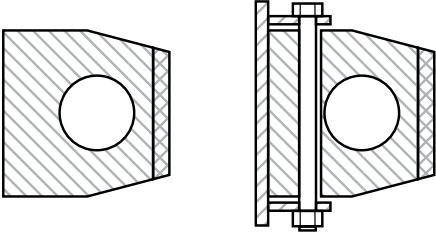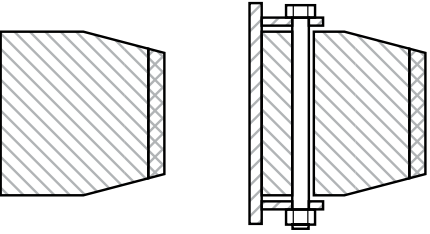
39.BUMPER-CAR	Keyhole fender	Wing-type-fender
 Hjulstop/fender uden huller og montageplade til personbiler eller varevogne. <i>Wheel stop / fender without holes and mounting plate for cars or vans.</i> 150 x 130 x 1.200 mm		
MC-fender	KF-A-fender	KF-B-fender
	 Composite front	 Composite front
KF-C-fender	KF-D-fender	
 Composite front	 Composite front	

Brush sections




Brush sections are found in connection with gates and doors in industry, where it is important to keep dirt and drafts in and/or out.

The brushes are usually made of nylon, but can be delivered with PP, horse hairs or stainless steel wire.



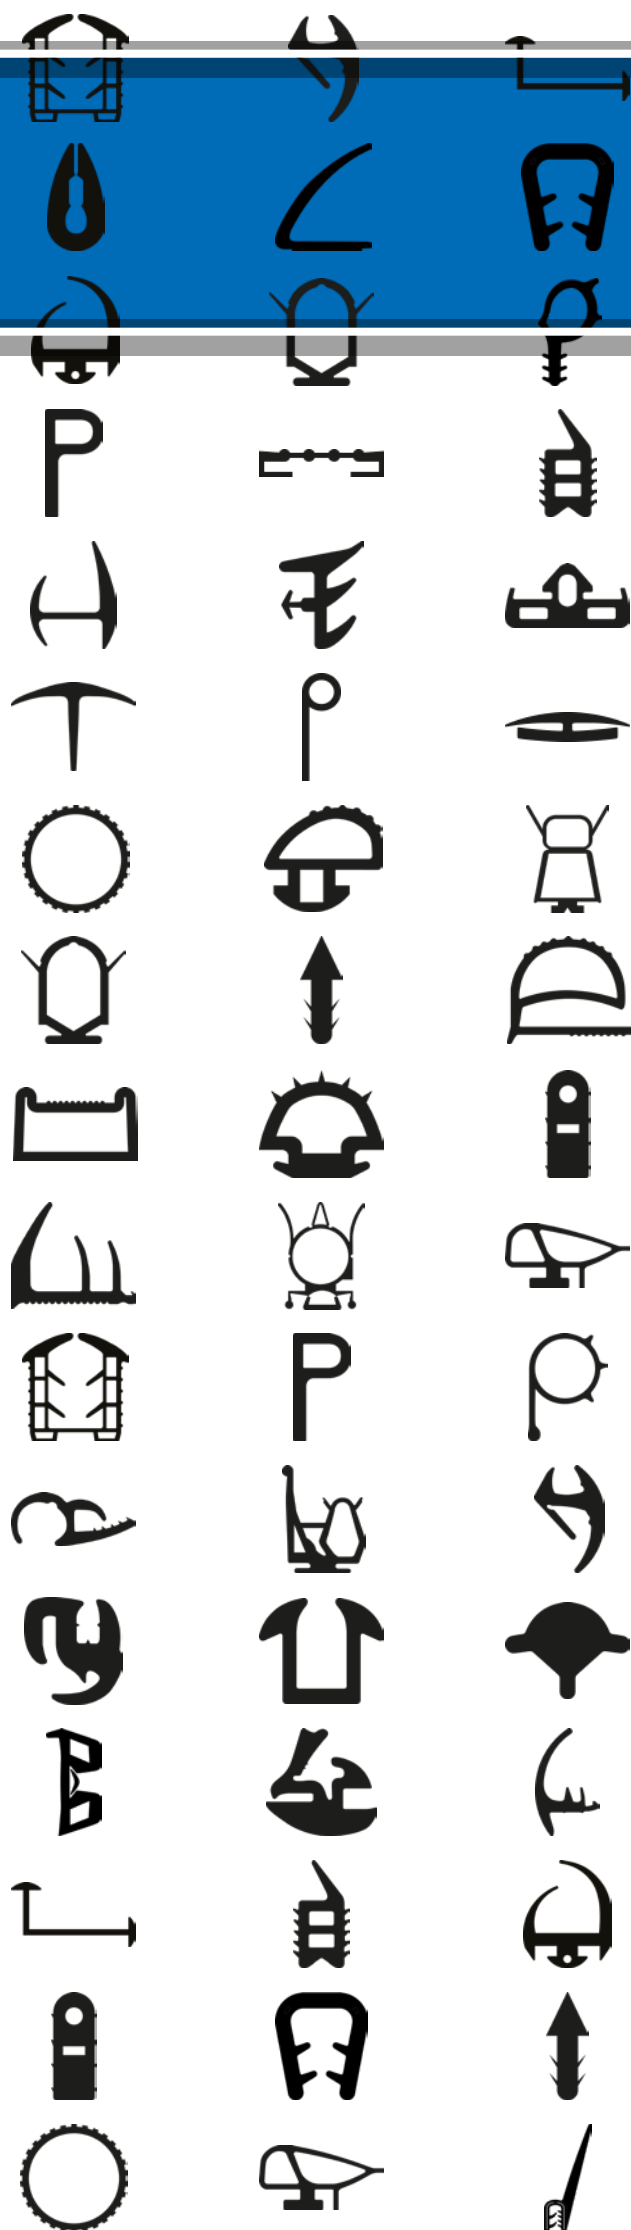
*Brushes and rails can be purchased separately.
Brush sections are supplied in length of 3 meters.*






Varenr. <i>Item no.</i>	Type Tegning <i>Drawing</i>	B Børstelængde <i>Brush length</i>	T Totalhøjde <i>Total height</i>
57.400/3E *	A	10 mm	26 mm
57.401/3E	A	14 mm	30 mm
57.402/3E *	A	24 mm	40 mm
57.408/3E *	A	34 mm	50 mm
57.403/3E	B	25 mm	50 mm
57.410/3E	B	35 mm	60 mm
57.405/3E *	B	45 mm	70 mm
57.404/3E *	C	40 mm	90 mm
57.406/3E	C	60 mm	110 mm
57.411/3E	C	80 mm	130 mm
57.407/3E	C	100 mm	150 mm
57.412/3E *	C	120 mm	170 mm
57.413/3E *	C	150 mm	200 mm

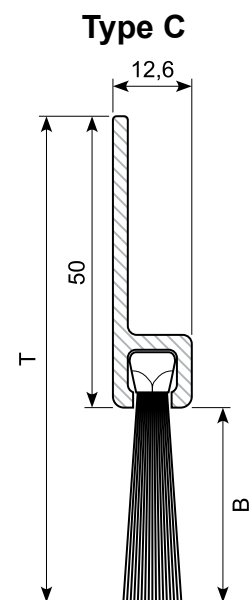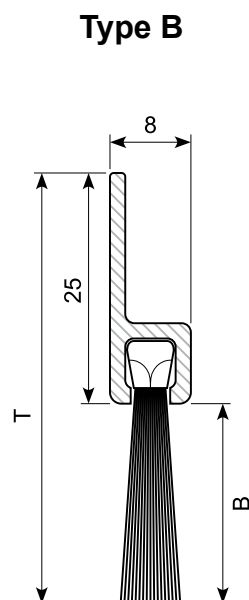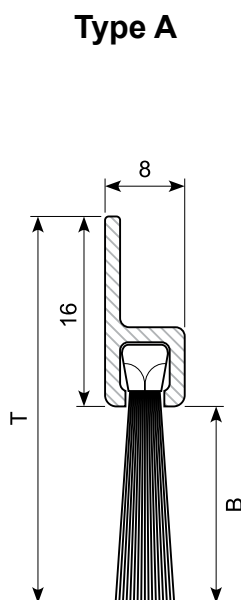


Varenr. <i>Item no.</i>	Type Tegning <i>Drawing</i>	B Børstelængde <i>Brush length</i>	T Totalhøjde <i>Total height</i>
57.440/3E *	D	10 mm	17 mm
57.441/3E *	D	14 mm	21 mm
57.442/3E *	D	24 mm	31 mm
57.445/3E *	D	34 mm	41 mm
57.443/3E *	E	25 mm	34 mm
57.449/3E *	E	35 mm	44 mm
57.444/3E *	E	45 mm	54 mm
57.450/3E *	F	40 mm	53 mm
57.446/3E *	F	60 mm	73 mm
57.448/3E *	F	80 mm	93 mm
57.447/3E *	F	100 mm	113 mm
57.451/3E *	F	120 mm	133 mm
57.452/3E *	F	150 mm	163 mm

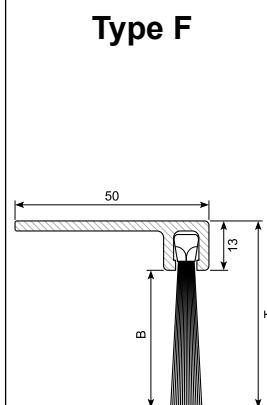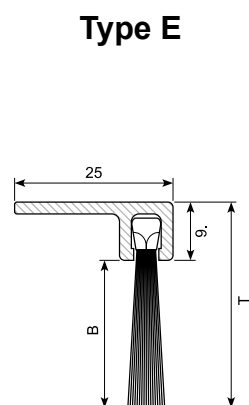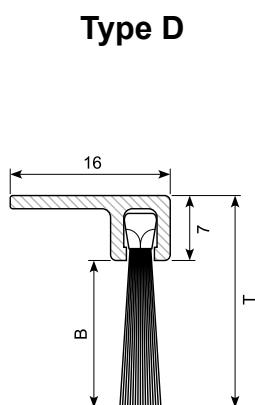

Varenr. <i>Item no.</i>	Type Tegning <i>Drawing</i>	B Børstelængde <i>Brush length</i>	T Totalhøjde <i>Total height</i>
57.453/3E *	G	10 mm	26 mm
57.454/3E *	G	14 mm	30 mm
57.455/3E *	G	24 mm	40 mm
57.456/3E *	G	34 mm	50 mm
57.423/3E *	H	25 mm	50 mm
57.424/3E *	H	35 mm	60 mm
57.425/3E *	H	45 mm	70 mm
57.426/3E *	I	40 mm	87 mm
57.427/3E *	I	60 mm	107 mm
57.428/3E *	I	80 mm	127 mm
57.429/3E	I	100 mm	147 mm
57.430/3E *	I	120 mm	167 mm
57.431/3E *	I	150 mm	197 mm

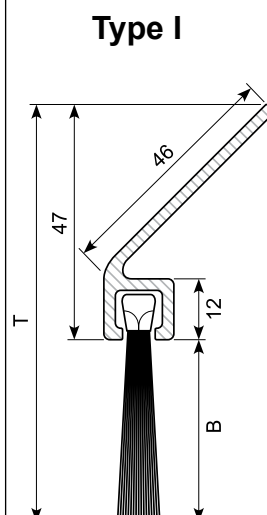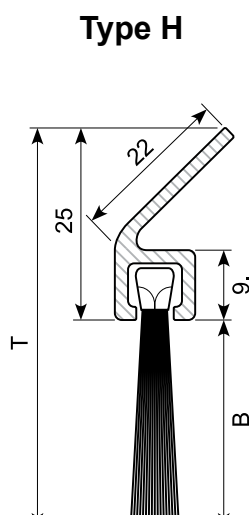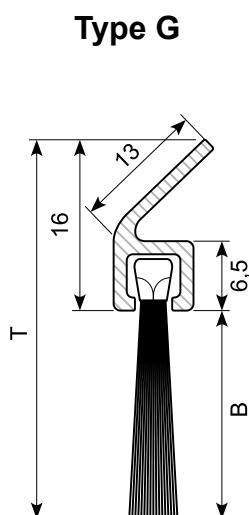


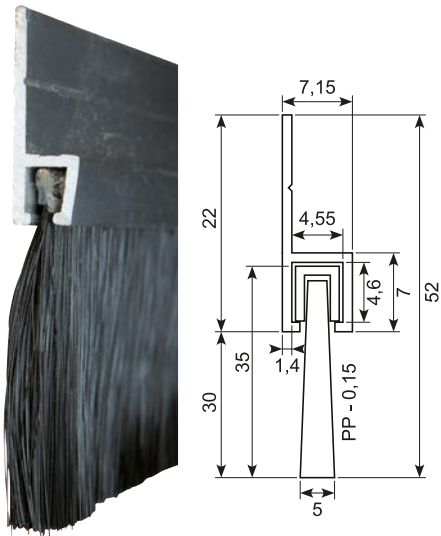57.403/2.5J




Material: Aluminium med polypropylene børste
Aluminium with polypropylene brush
Length: 2,5 m

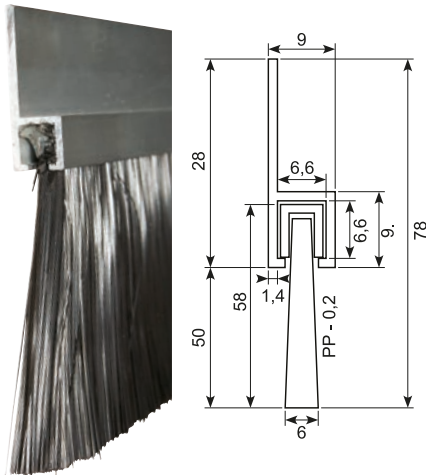57.405/2J




Material: Aluminium med polypropylene børste
Aluminium with polypropylene brush
Length: 2 m

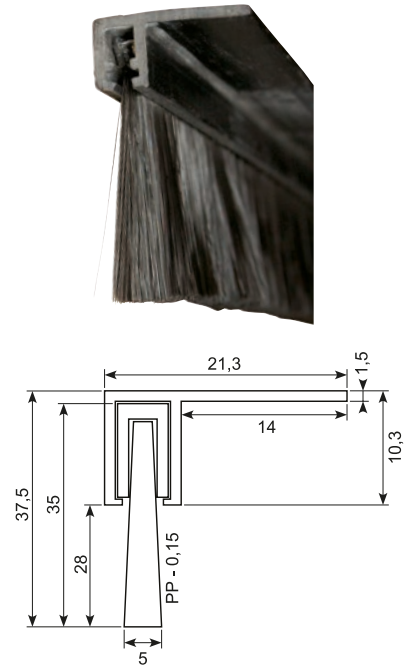57.443/2JP




Material: Plastik med polypropylene børste
Plastic with polypropylene brush
Length: 2 m

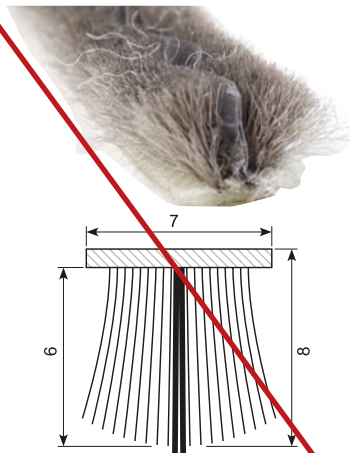33.611




Selvklæbende liste med børster og vandtæt midterfilm
Self-adhesive list with brushes and waterproof center film
Min. order: 6.000 m

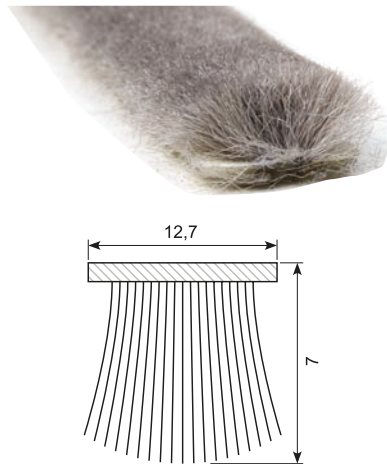33.615




Selvklæbende liste med børster
Self-adhesive list with brushes

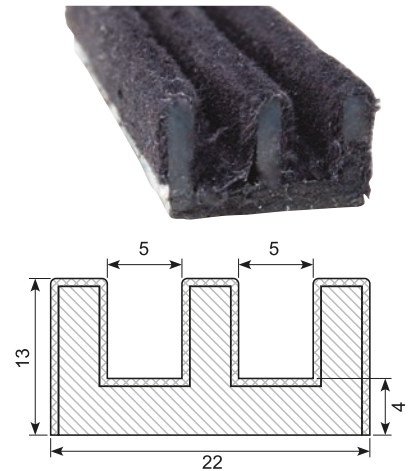33.670




Kanalliste, dobbeltgummi med filt
Flocked channel molding
Material: EPDM, black
Hardness: SH 70

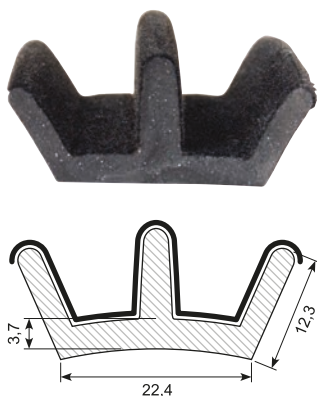33.671




Material: EPDM
Density: 1,28
Hardness: SH 70
Flock: 3,3 dtex
Min. order: 2.000 m

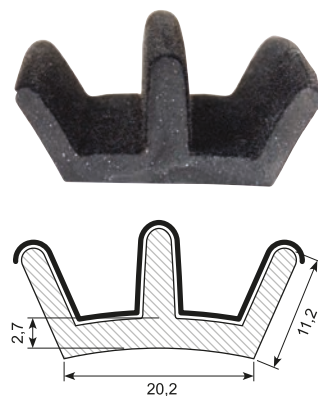33.672











Material: EPDM
Density: 1,28
Hardness: SH 70
Flock: 3,3 dtex
Min. order: 2.000 m

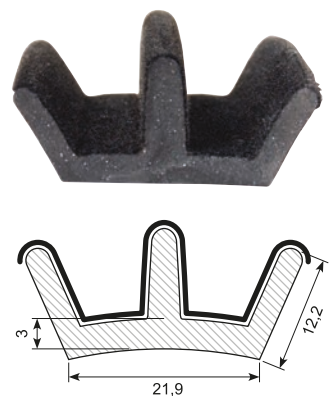33.673



Material: EPDM
Density: 1,28
Hardness: SH 70
Flock: 3,3 dtex
Min. order: 2.000 m


*** Skaffevare Special order item**

33.674 *  Material: EPDM Density: 1,28 Hardness: SH 70 Flock: 3,3 dtex Min. order: 3.000 m	33.675 *  Material: EPDM Density: 1,28 Hardness: SH 70 Flock: 3,3 dtex Min. order: 3.000 m	33.676 *  Material: EPDM Density: 1,28 Hardness: SH 70 Flock: 3,3 dtex Min. order: 3.000 m	30.13066  Material: EPDM Density: 1,28 Hardness: SH 70 Flock: 3,3 dtex Glass width: 5 mm <i>Discontinued when sold.</i> Alternative e.g. 30.13066NEW
33.624 *  Material: EPDM Density: 1,28 Hardness: SH 70 Flock: 3,3 dtex Min. order: 3.000 m	33.625 *  Material: EPDM Density: 1,28 Hardness: SH 70 Flock: 3,3 dtex Min. order: 3.000 m	30.14803 *  Material: EPDM Density: 1,28 Hardness: SH 70 Flock: 3,3 dtex Min. order: 3.000 m	33.416  Material: PVC, with brush Grip range: 1 - 2,5 mm Hardness: SH 78 Insert: 25 x 0,48 mm steel

Sound proofing

Sound absorbing panels are set up to muffle unwanted sound and to separate source of noise from the environment. Often used in engine rooms, cabins and compressors and far more places.

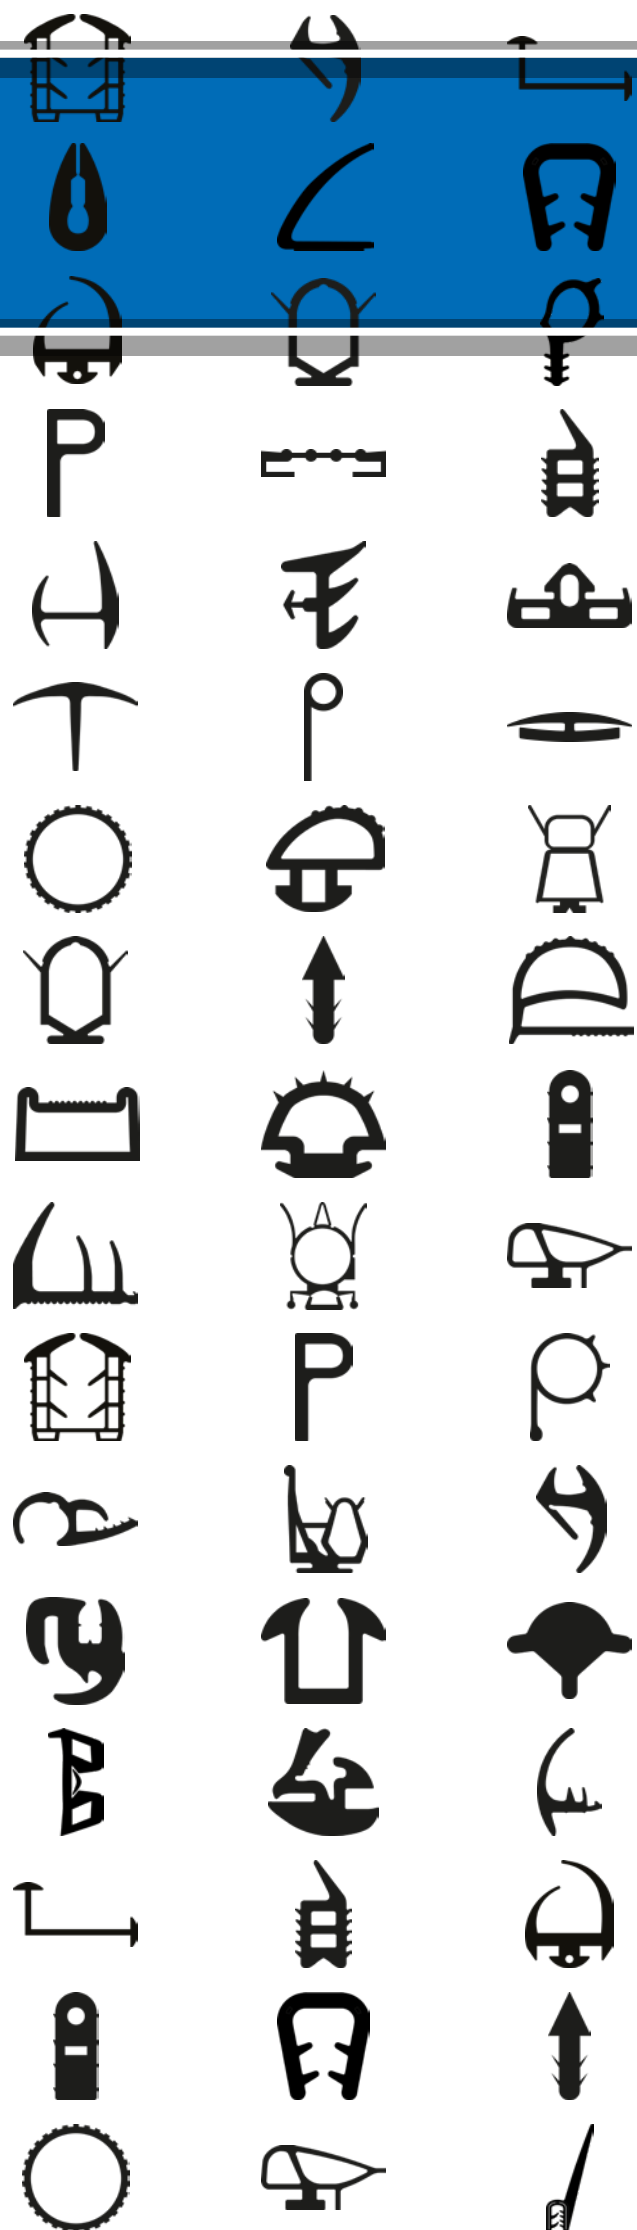We offer sound proofing in many different materials, so you can always find something that suits your requirements.



Self-adhesive foam with Tedlar coat

Depending on the foil covers this is used in cabs, engine compartment, compressors, generators, fans, turbines, pumps or the like.

Varenr. Item no.	Farve Color	Overflade Surface	Størrelse Size
48.603	Hvid White	Plan 100% Plane 100%	20 x 1.200 x 1.500 mm





Self-adhesive foam with Bitumen inserts

Varenr. Item no.	Overflade Surface	Størrelse Size
48.613K	Folie, Plan 100% Foil, Plane 100%	33 x 600 x 1.000 mm

Self-adhesive foam with rubber surface

Varenr. Item no.	Farve Color	Overflade Surface	Størrelse Size
48.626	Sort Black	Plan 100% Plane 100%	2 / 10 x 1.200 x 1.500 mm

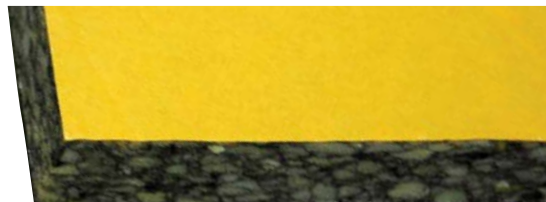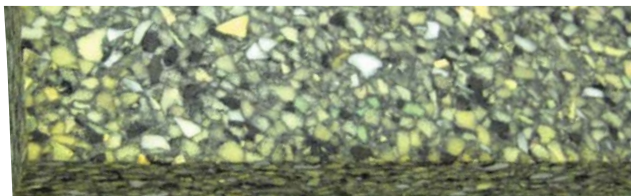The soundproofing material is made of open-celled, flexible foam materials in heavier densities. The increased density is achieved by using regenerated foam. The field of application can be soundproofing of the engine compartment in yachting, wind turbine housings, compressors and other noisy machines where it is possible to separate the noise source from the surrounding area. It is often necessary to assure a cooling air circulation in these situations. Therefore it is recommendet to make a sound lock covered with soundproofing material. Granulate cold foam with unique soundproofing ability is used for coating of engine compartment, machine guards, ventilation chambers and noise cabins. Due to the low density it may also be used as absorbent.



Varenr. Item no.	Overflade Surface	Størrelse Size
48.634	Ingen <i>None</i>	20 x 500 x 1.000 mm
48.635	Ingen <i>None</i>	30 x 500 x 1.000 mm
48.636	Ingen <i>None</i>	40 x 500 x 1.000 mm

Varenr. Item no.	Overflade Surface	Størrelse Size
48.634K	Klæb <i>Glue</i>	20 x 500 x 1.000 mm
48.635K	Klæb <i>Glue</i>	30 x 500 x 1.000 mm
48.636K	Klæb <i>Glue</i>	40 x 500 x 1.000 mm




Varenr. Item no.	Overflade Surface	Størrelse Size
48.634F	Folie <i>Foil</i>	20 x 500 x 1.000 mm
48.635F	Folie <i>Foil</i>	30 x 500 x 1.000 mm
48.636F	Folie <i>Foil</i>	40 x 500 x 1.000 mm
48.636FX	Folie <i>Foil</i>	40 x 1.000 x 2.000 mm

Varenr. Item no.	Overflade Surface	Størrelse Size
48.634KF	Folie og klæb <i>Foil and glue</i>	20 x 500 x 1.000 mm
48.635KF	Folie og klæb <i>Foil and glue</i>	30 x 500 x 1.000 mm
48.636KF	Folie og klæb <i>Foil and glue</i>	40 x 500 x 1.000 mm

Soundproofing materials (PU) are typically made of open-celled, flexible foam materials in lighter densities. The field of application will typically be interior sheathing of cabs, noise barriers, sound locks, canal walls and similar situations where it is not possible to separate the noise source from the surrounding area.


Self-adhesive foam without foil

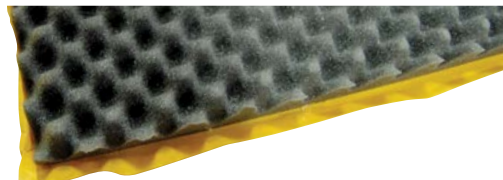This is used for interior sheathing of engine compartment, machine guards, noise cabins, electrical control panels and inserts in packaging with more.



Varenr. Item no.	Overflade Surface	Størrelse Size
48.621	Plan <i>Plane</i>	10 x 1.200 x 1.500 mm
48.622	Plan <i>Plane</i>	20 x 1.200 x 1.500 mm
48.622X	Plan <i>Plane</i>	30 x 1.200 x 1.500 mm


Varenr. Item no.	Overflade Surface	Størrelse Size
48.623	Æggebakke <i>Egg tray</i>	30 / 15 x 1200 x 1500 mm
48.623X	Æggebakke <i>Egg tray</i>	30 / 15 x 1.200 x 2.000 mm
48.624	Æggebakke <i>Egg tray</i>	40 / 20 x 1200 x 1500 mm

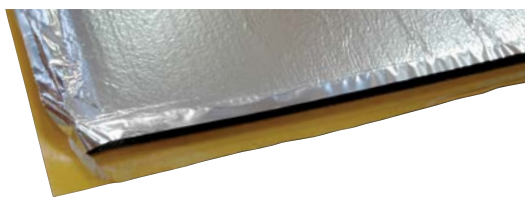

Varenr. Item no.	Farve Color	Overflade Surface	Størrelse Size
48.608	Alu.	Plan <i>Plane</i> 100%	20 x 1.200 x 1.500 mm
48.609	Alu.	Plan <i>Plane</i> 100%	30 x 1.200 x 1.500 mm


Self-adhesive foam with PVC foil

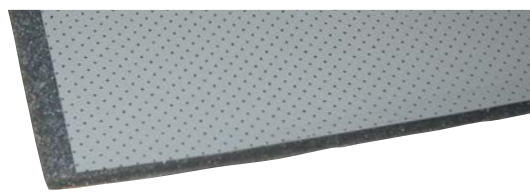Depending on the foil covers this is used for sheathing in cabs, engine compartment, compressors, generators, fans, turbines, pumps or the like.



Varenr. Item no.	Farve Color	Overflade Surface	Størrelse Size
48.605X	Sort <i>Black</i>	2% perforated	10 x 1.200 x 1.500 mm
48.605	Sort <i>Black</i>	2% perforated	20 x 1.200 x 1.500 mm
48.605Y	Sort <i>Black</i>	2% perforated	30 x 1.200 x 1.500 mm

Varenr. Item no.	Farve Color	Overflade Surface	Størrelse Size
48.451	Grå <i>Grey</i>	2 % perf. / pap <i>2 % perf. / cardcoard</i>	10 x 1.000 x 1.500 mm
48.452	Grå <i>Grey</i>	2 % perf. / pap <i>2 % perf. / cardcoard</i>	20 x 1.000 x 1.500 mm

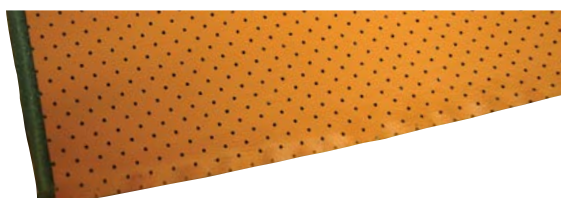


Varenr. Item no.	Farve Color	Overflade Surface	Størrelse Size
48.605B *	Brun <i>Brown</i>	2 % perforated	20 x 1.200 x 1.500 mm

Min. order: 10 pcs.

* Skaffevare Special order item



Bitumen plates

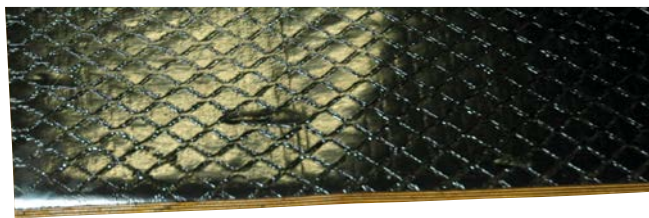Based on synthetic material. The soundproofing material is made of hard and heavy material. The field of application can be damping of large plate areas, bottom plates in cars / machinery, doors and other places where there may be resonance.



Varenr. Item no.	Overflade Surface	Pakke Pack	Størrelse Size
48.544A	Klæb Adhesive	4 pcs.	500 x 500 x 3 mm
48.542	Klæb Adhesive	6 pcs.	500 x 250 x 2,2 mm

Varenr. Item no.	Overflade Surface	Pakke Pack	Tykkelse Thickness	Størrelse Size
48.442	Klæb Adhesive	1 pc	1,7 mm	500 x 1.050 mm

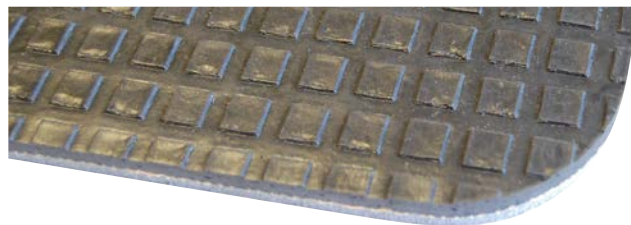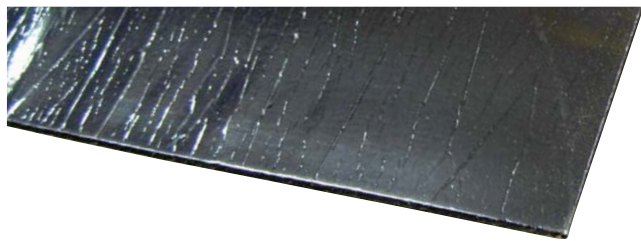

Varenr. Item no.	Overflade Surface	Pakke Pack	Tykkelse Thickness	Størrelse Size
48.612	Klæb Adhesive	1 pc	3 mm	750 x 1.200 mm

Varenr. Item no.	Tykkelse Thickness	Størrelse Size
48.618	10 mm	1.250 x 1.500 mm

68.4250



Alutape til samling af motorisolering. 50 mm x 10 m.
*Alu tape for the assembly of motor insulation.
 50 mm x 10 m.*

63.550300



Plastskive Ø50 mm til montering af motorisolering.
Plastic disc with 50 mm diameter for mounting of motor insulation.

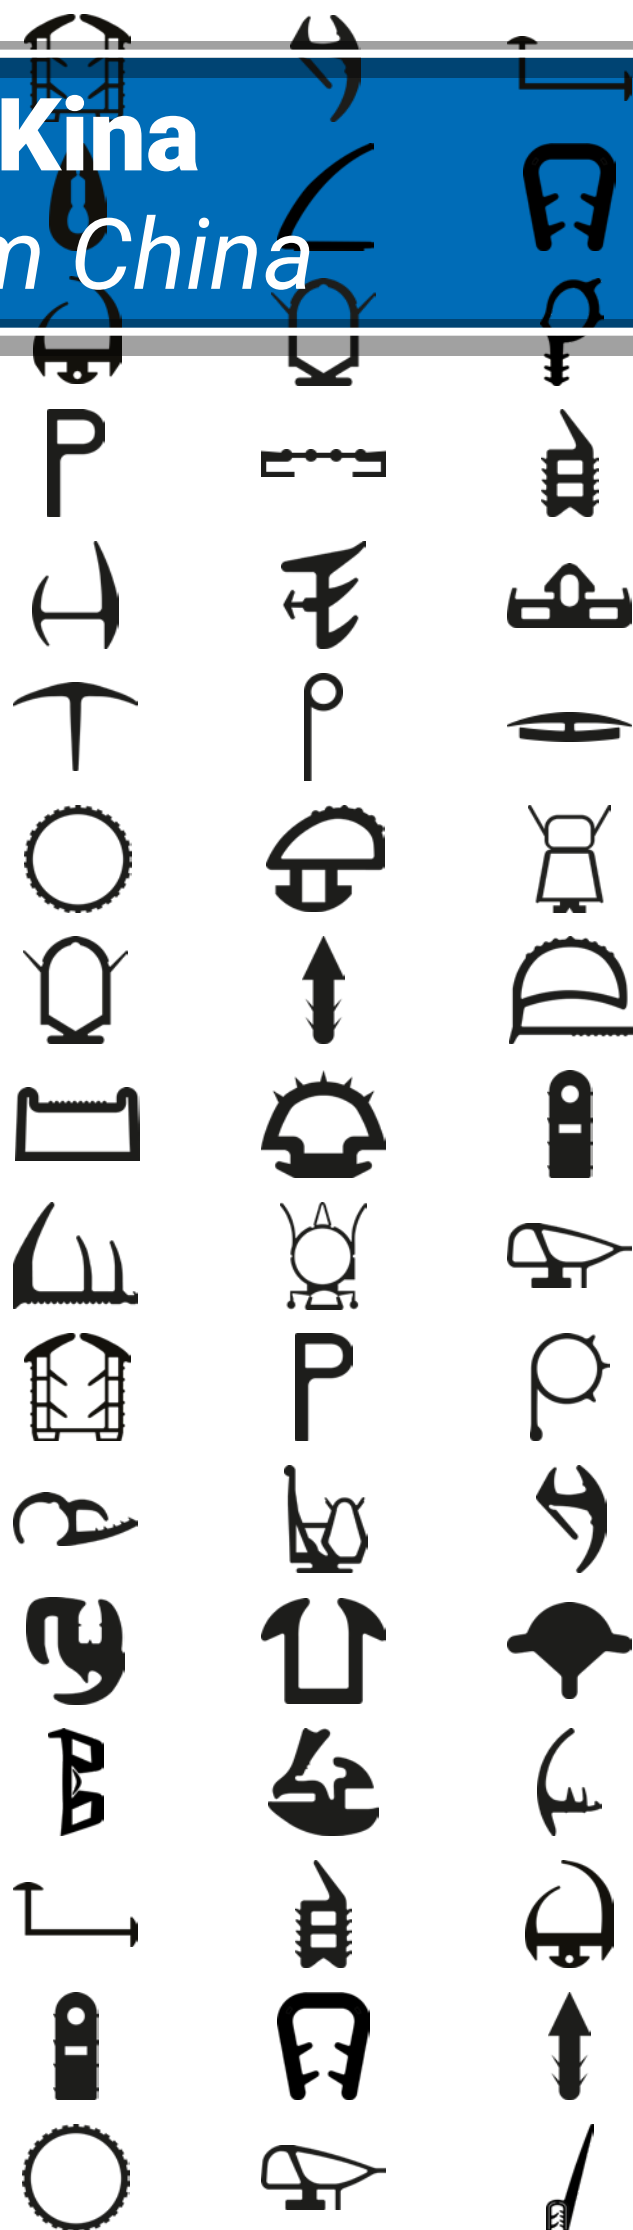
Gummiplader fra Kina

Rubber sheets from China

Rubber sheets from China are excellent alternatives to European sheets at very favorable prices. Should not be understood as a substitute for European qualities. The sheets are good alternatives for most common tasks. They can be used for: vehicles, animal transport, workshop floors and much more.

Cannot be recommended for high-quality seals with high demands on tolerances and mechanical strength. In case of doubt please compare the technical descriptions. The sheets have higher tolerances on thickness than the European ones.

The rubber sheets are delivered on rolls wrapped in plastic. Many other qualities are available if large quantities are required.





NR-SBR rubber sheet

Commercial rubber mat for normal use, where there are no specific demands on tensile strength. Useful for eg. seals.

Material: NR - SBR

Colour: Sort *Black*

Quality: Kommerciel *Commercial*

Varenr. <i>Item no.</i>	Bredde <i>Width</i>	Længde <i>Length</i>	Tykkelse <i>Thickness</i>	Indlæg <i>Insertion</i>	Hårdhed <i>Hardness</i>	Densitet <i>Density</i>	Forlængelse <i>Elongation</i>	Arbejds- temperatur <i>Working temperature</i>	Trækstyrke <i>Tensile strength</i>
38.400-2	1.400 mm	20.000 mm	2 mm	1	SH 70	1,55 g/cm ³	200%	-20 +70 °C	4 MPa
38.400-3	1.400 mm	20.000 mm	3 mm	1	SH 70	1,55 g/cm ³	200%	-20 +70 °C	4 MPa
38.400-4	1.400 mm	20.000 mm	4 mm	1	SH 70	1,55 g/cm ³	200%	-20 +70 °C	4 MPa
38.400-5	1.400 mm	10.000 mm	5 mm	1	SH 70	1,55 g/cm ³	200%	-20 +70 °C	4 MPa
38.400-6/650	650 mm	10.000 mm	6 mm	2	SH 70	1,55 g/cm ³	200%	-20 +70 °C	4 MPa
38.400-6	1.400 mm	10.000 mm	6 mm	2	SH 70	1,55 g/cm ³	200%	-20 +70 °C	4 MPa
38.400-8	1.400 mm	10.000 mm	8 mm	2	SH 70	1,55 g/cm ³	200%	-20 +70 °C	4 MPa
38.400-10	1.400 mm	10.000 mm	10 mm	2	SH 70	1,55 g/cm ³	200%	-20 +70 °C	4 MPa
38.400-12	1.400 mm	10.000 mm	12 mm	2	SH 70	1,55 g/cm ³	200%	-20 +70 °C	4 MPa
38.400-15	1.400 mm	5.000 mm	15 mm	0	SH 70	1,55 g/cm ³	200%	-20 +70 °C	4 MPa
38.400-20	1.400 mm	5.000 mm	20 mm	0	SH 70	1,55 g/cm ³	200%	-20 +70 °C	4 MPa
38.400-25	1.400 mm	5.000 mm	25 mm	0	SH 70	1,55 g/cm ³	200%	-20 +70 °C	4 MPa

Soft para rubber sheet

Very soft. Highly elastic, good friction.

Material: NR

Colour: Rød *Red*

Quality: Kommerciel *Commercial*

Varenr. <i>Item no.</i>	Bredde <i>Width</i>	Længde <i>Length</i>	Tykkelse <i>Thickness</i>	Indlæg <i>Insertion</i>	Hårdhed <i>Hardness</i>	Densitet <i>Density</i>	Forlængelse <i>Elongation</i>	Arbejds- temperatur <i>Working temperature</i>	Trækstyrke <i>Tensile strength</i>
38.401-2	1.400 mm	10.000 mm	2 mm	0	SH 40	1,1 - 1,25 g/cm ³	600%	-20 +90 °C	18 MPa
38.401-3	1.400 mm	10.000 mm	3 mm	0	SH 40	1,1 - 1,25 g/cm ³	600%	-20 +90 °C	18 MPa
38.401-4	1.400 mm	10.000 mm	4 mm	0	SH 40	1,1 - 1,25 g/cm ³	600%	-20 +90 °C	18 MPa
38.401-5	1.400 mm	10.000 mm	5 mm	0	SH 40	1,1 - 1,25 g/cm ³	600%	-20 +90 °C	18 MPa
38.401-6	1.400 mm	10.000 mm	6 mm	0	SH 40	1,1 - 1,25 g/cm ³	600%	-20 +90 °C	18 MPa
38.401-10	1.400 mm	10.000 mm	10 mm	0	SH 40	1,1 - 1,25 g/cm ³	600%	-20 +90 °C	18 MPa
38.401-15	1.400 mm	5.000 mm	15 mm	0	SH 40	1,1 - 1,25 g/cm ³	600%	-20 +90 °C	18 MPa
38.401-20	1.400 mm	5.000 mm	20 mm	0	SH 40	1,1 - 1,25 g/cm³	600%	-20 +90 °C	18 MPa

EPDM rubber plate

With high resistance to ozon and climate. Good temperature resistance.

Material: 30% EPDM

Colour: Sort *Black*

Quality: Kommerciel *Commercial*

Varenr. <i>Item no.</i>	Bredde <i>Width</i>	Længde <i>Length</i>	Tykkelse <i>Thickness</i>	Indlæg <i>Insertion</i>	Hårdhed <i>Hardness</i>	Densitet <i>Density</i>	Forlængelse <i>Elongation</i>	Arbejds- temperatur <i>Working temperature</i>	Trækstyrke <i>Tensile strength</i>
38.402-0,5	1.200 mm	20.000 mm	0,5 mm	0	SH 70	1,4 g/cm ³	300%	-30 +100 °C	5 MPa
38.402-1 ●	1.400 mm	20.000 mm	1 mm	0	SH 70	1,4 g/cm ³	300%	-30 +100 °C	5 MPa
38.402-2 ●	1.400 mm	10.000 mm	2 mm	0	SH 70	1,4 g/cm ³	300%	-30 +100 °C	5 MPa
38.402-3 ●	1.400 mm	10.000 mm	3 mm	0	SH 70	1,4 g/cm ³	300%	-30 +100 °C	5 MPa
38.402-4 ●	1.400 mm	10.000 mm	4 mm	0	SH 70	1,4 g/cm ³	300%	-30 +100 °C	5 MPa
38.402-5 ●	1.400 mm	10.000 mm	5 mm	0	SH 70	1,4 g/cm ³	300%	-30 +100 °C	5 MPa

● Ozonbestandighed 200 pphm

Ozone resistance 200 pphm

CR rubber plate

Good climate resistance. Used where there are no specific demands to tensile strength. Conditional oil resistant.

Materiale *Material*: CR

Colour: Sort *Black*

Quality: Kommerciel *Commercial*

Varenr. <i>Item no.</i>	Bredde <i>Width</i>	Længde <i>Length</i>	Tykkelse <i>Thickness</i>	Indlæg <i>Insertion</i>	Hårdhed <i>Hardness</i>	Densitet <i>Density</i>	Forlængelse <i>Elongation</i>	Arbejds- temperatur <i>Working temperature</i>	Trækstyrke <i>Tensile strength</i>
38.403-2	1.400 mm	20.000 mm	2 mm	0	SH 65	1,55 g/cm ³	280%	-30 +70 °C	3,5 MPa
38.403-3	1.400 mm	20.000 mm	3 mm	0	SH 65	1,55 g/cm ³	280%	-40 +90 °C	3,5 MPa
38.403-4	1.400 mm	20.000 mm	4 mm	0	SH 65	1,55 g/cm ³	280%	-40 +90 °C	3,5 MPa
38.403-5	1.400 mm	10.000 mm	5 mm	0	SH 65	1,55 g/cm ³	280%	-40 +90 °C	5 MPa
38.403-6	1.400 mm	10.000 mm	6 mm	0	SH 65	1,55 g/cm ³	280%	-40 +90 °C	5 MPa
38.403-8	1.400 mm	10.000 mm	8 mm	0	SH 65	1,55 g/cm ³	280%	-40 +90 °C	3,5 MPa

NBR / Nitrile rubber plate

With good mechanical properties. Recommended for alfatc and aromatic oils and petrol.

Material: NBR

Colour: Sort *Black*

Quality: Kommerciel *Commercial*

Varenr. <i>Item no.</i>	Bredde <i>Width</i>	Længde <i>Length</i>	Tykkelse <i>Thickness</i>	Indlæg <i>Insertion</i>	Hårdhed <i>Hardness</i>	Densitet <i>Density</i>	Forlæn- gelse <i>Elongation</i>	Arbejds- temperatur <i>Working temperature</i>	Trækstyrke <i>Tensile strength</i>
38.404-2	1.400 mm	20.000 mm	2 mm	0	SH 70	1,49 g/cm ³	330%	-30 +70 °C	10 MPa
38.404-3	1.400 mm	20.000 mm	3 mm	0	SH 70	1,49 g/cm ³	330%	-30 +70 °C	10 MPa
38.404-4	1.400 mm	20.000 mm	4 mm	0	SH 70	1,49 g/cm ³	330%	-30 +70 °C	10 MPa
38.404-5	1.400 mm	10.000 mm	5 mm	0	SH 70	1,49 g/cm ³	330%	-30 +70 °C	10 MPa
38.404-6	1.400 mm	10.000 mm	6 mm	0	SH 70	1,49 g/cm³	330%	-30 +70 °C	10 MPa
38.404-8	1.400 mm	10.000 mm	8 mm	0	SH 70	1,49 g/cm³	330%	-30 +70 °C	10 MPa
38.404-10	1.400 mm	10.000 mm	10 mm	0	SH 70	1,49 g/cm ³	330%	-30 +70 °C	10 MPa
38.404-12 *	1.400 mm	10.000 mm	12 mm	0	SH 70	1,49 g/cm³	330%	-30 +70 °C	10 MPa
38.404-15	1.400 mm	5.000 mm	15 mm	0	SH 70	1,49 g/cm³	330%	-30 +70 °C	10 MPa
38.404-20 *	1.400 mm	5.000 mm	20 mm	0	SH 70	1,49 g/cm ³	330%	-30 +70 °C	10 MPa

* Skaffevare *Special order item*

Wearing/abrasion rubber sheet

, grusgrave, sandblæsekabiner.

With high tensile strength. Recommended for wearing application, gravel pits, sandblasting.

Material: NR-SBR

Colour: Sort *Black*

Varenr. <i>Item no.</i>	Bredde <i>Width</i>	Længde <i>Length</i>	Tykkelse <i>Thickness</i>	Indlæg <i>Insertion</i>	Hårdhed <i>Hardness</i>	Densitet <i>Density</i>	Forlængelse <i>Elongation</i>	Arbejds- temperatur <i>Working temperature</i>	Trækstyrke <i>Tensile strength</i>
38.405-6	1.400 mm	10.000 mm	6 mm	0	SH 60	1,2 g/cm ³	400%	-30 +70 °C	15 MPa
38.405-8	1.400 mm	10.000 mm	8 mm	0	SH 60	1,2 g/cm ³	400%	-30 +70 °C	15 MPa
38.405-10	1.400 mm	10.000 mm	10 mm	0	SH 60	1,2 g/cm ³	400%	-30 +70 °C	15 MPa
38.405-10X *	2.000 mm	10.000 mm	10 mm	0	SH 60	1,2 g/cm ³	400%	-30 +70 °C	15 MPa
38.405-15	1.400 mm	10.000 mm	15 mm	0	SH 60	1,2 g/cm ³	400%	-30 +70 °C	15 MPa
38.405-20 *	1.400 mm	5.000 mm	20 mm	0	SH 60	1,2 g/cm ³	400%	-30 +70 °C	15 MPa
38.405-40 *	1.200 mm	7.000 mm	40 mm	0	SH 60	1,2 g/cm ³	400%	-30 +70 °C	15 MPa

Silicone sheet

Material: FDA Silikone

Varenr. <i>Item no.</i>	Vidde <i>Width</i>	Længde <i>Length</i>	Bredde <i>Thickness</i>	Farve <i>Colour</i>	Hårdhed <i>Hardness</i>	Densitet <i>Density</i>	Forlængelse <i>Elongation</i>	Arbejds- temperatur <i>Working temperature</i>	Trækstyrke <i>Tensile strength</i>
38.406-2T	1.200 mm	10.000 mm	2 mm	Transparent	SH 60	1,25 g/cm ³	450%	-40 +200 °C	6 MPa
38.406-3T	1.200 mm	10.000 mm	3 mm	Transparent	SH 60	1,25 g/cm ³	450%	-40 +200 °C	6 MPa
38.406-5T	1.200 mm	10.000 mm	5 mm	Transparent	SH 60	1,25 g/cm ³	450%	-40 +200 °C	6 MPa
38.406-3H	1.200 mm	10.000 mm	3 mm	Hvid <i>White</i>	SH 60	1,3 g/cm ³	300%	-40 +250 °C	6 MPa

Viton-gummi

Varenr. <i>Item no.</i>	Tykkelse <i>Thickness</i>	Bredde <i>Width</i>	Længde <i>Length</i>	Indlæg <i>Insertion</i>	Hårdhed <i>Hardness</i>	Forlængelse <i>Elongation</i>	Trækstyrke <i>Tensile strength</i>	Min. order
38.429-2 *	2 mm	1.200 mm	10.000 mm	0	SH 70	250%	7 MPa	12 m²

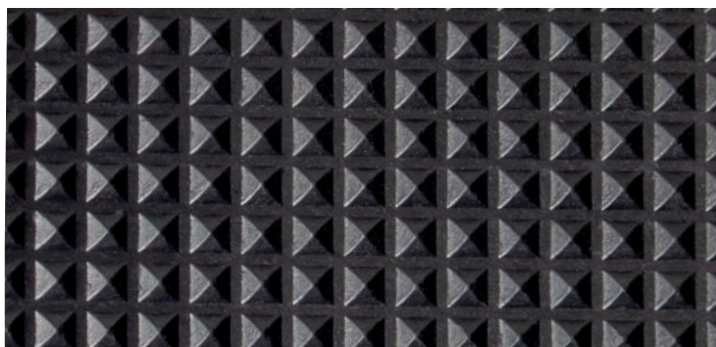
***** Skaffevare *Special order item*

Pyramidal rubber sheet


Måtte til industrigulve og maskinområder, varehuse og trafikerede områder. Skridsikker overflade.
Mat for industrial floors and machine areas, warehouses and trafficked areas. Non-slip surface.

Material: SBR

Colour: Sort *Black*



Varenr. <i>Item no.</i>	Bredde <i>Width</i>	Længde <i>Length</i>	Tykkelse <i>Thickness</i>	Indlæg <i>Insertion</i>	Hårdhed <i>Hardness</i>	Densitet <i>Density</i>	Forlængelse <i>Elongation</i>	Arbejds- temperatur <i>Working temperature</i>	Trækstyrke <i>Tensile strength</i>
38.432	1.200 mm	10.000 mm	3 mm	0	SH 65 - 70	1,5 g/cm ³	200	-20 +70 °C	3 MPa

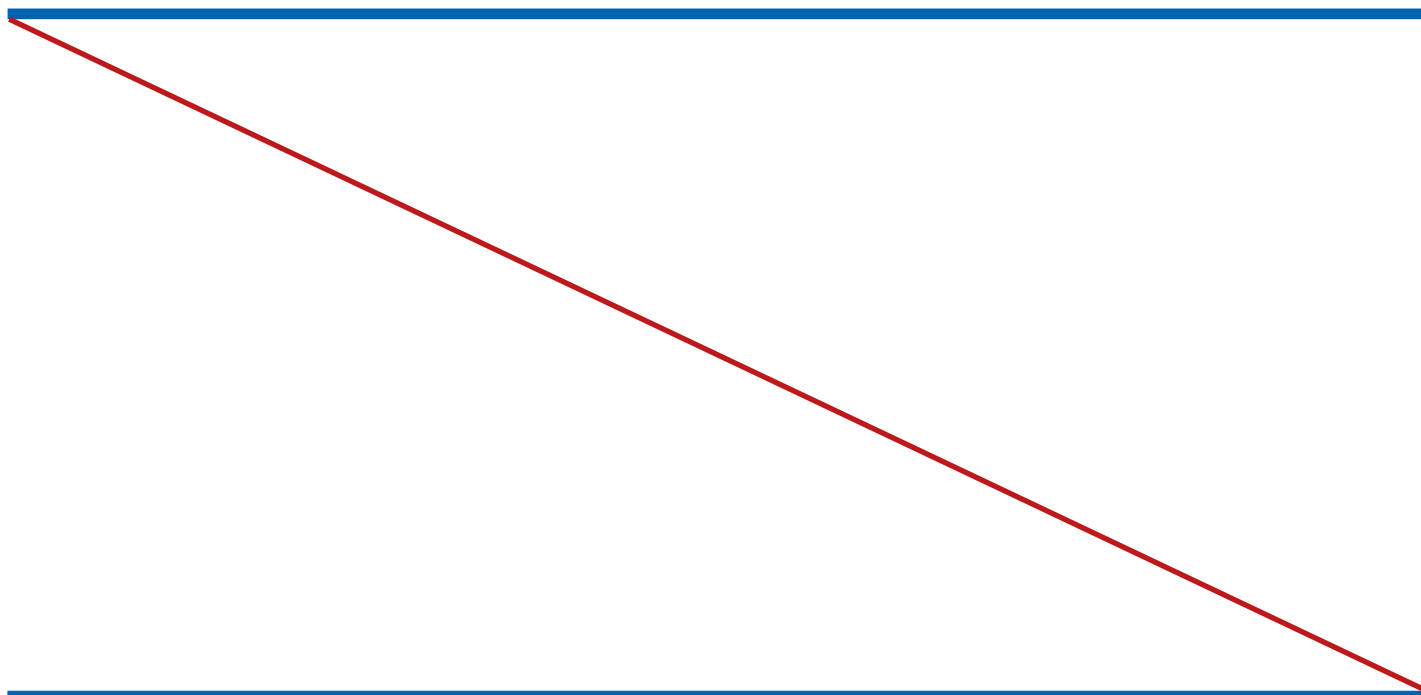


Studded flooring

Studded flooring, recommended for high traffic areas such as metro, airports, supermarkets, lifts, buses, trains, trucks, boats.

Material: SBR

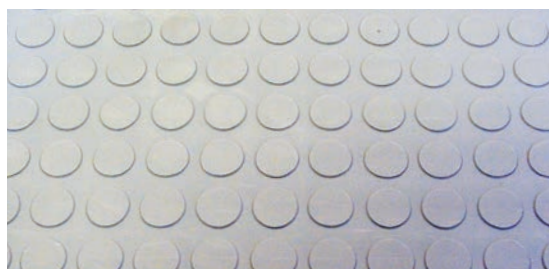Quality: Kommerciel *Commercial*





Varenr. <i>Item no.</i>	Bredde <i>Width</i>	Længde <i>Length</i>	Tykkelse <i>Thickness</i>	Indlæg <i>Insertion</i>	Farve <i>Color</i>	Hårdhed <i>Hardness</i>	Densitet <i>Density</i>	Forlængelse <i>Elongation</i>	Arbejds- temperatur <i>Working temperature</i>	Trækstyrke <i>Tensile strength</i>
38.427-3CXL	1.400 mm	10.000 mm	3,5 mm	0	Sort <i>Black</i>	SH 65-70	1,5 g/cm ³	150%	-20 +70 °C	3 MPa
38.427-3GC	1.200 mm	10.000 mm	3,5 mm	0	Lysegrå <i>Light grey</i>	SH 65-70	1,6 g/cm ³	150%	-20 +70 °C	3 MPa

Fine ribbet rubber mat

Fine-ribbed rubber mat. Non-slip coverings for cabins, working benches, shelves, corridors, vehicles, sporting facilities or exhibition floors.

Material: NR/SBR

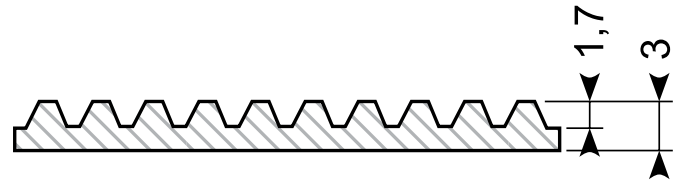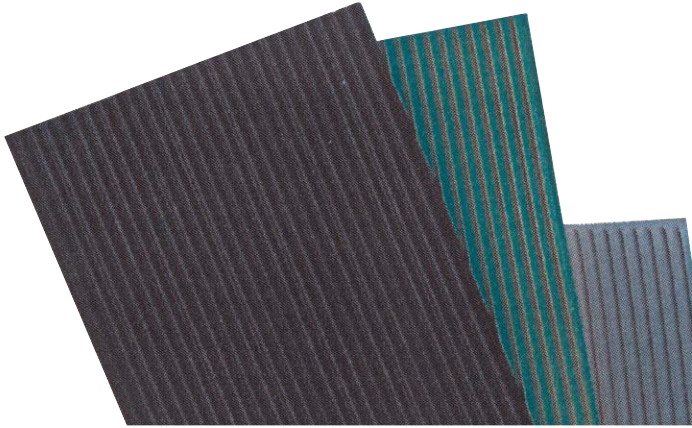Ingen regenereret gummi anvendt. *No regenerated rubber used.*





Varenr. Item no.	Bredde Width	Længde Length	Tykkelse Thick- ness	Indlæg Insertion	Farve Color	Hårdhed Hardness	Densitet Density	Forlæn- gelse Elonga- tion	Arbejds- temperatur Working temperature	Træk- styrke Tensile strength	Bemærk Note
38.407-3X	1.200 mm	20.000 mm	3 mm	0	Sort Black	SH 70	1,46 g/cm ³	200%	-20 +70 °C	4 MPa	100% virgin quality SBR
38.407-3	1.400 mm	20.000 mm	3 mm	0	Sort Black	SH 70	1,46 g/cm ³	200%	-20 +70 °C	4 MPa	100% virgin quality SBR
38.407-3C	1.400 mm	20.000 mm	3 mm	0	Sort Black	SH 70	1,6 g/cm ³	280%	-10 +70 °C	3,5 MPa	
38.407-3G	1.400 mm	20.000 mm	3 mm	0	Grå Grey	SH 70	1,6 g/cm ³	350%	-10 +70 °C	5 MPa	
38.407-3XL	1.800 mm	10.000 mm	3,5 mm	0	Sort Black	SH 70	1,46 g/cm ³	200%		4 MPa	

Medium-ribbed bus mat

Recommended for floors and walls for buses, boats, animal transport, work shops.

Colour: Sort *black*

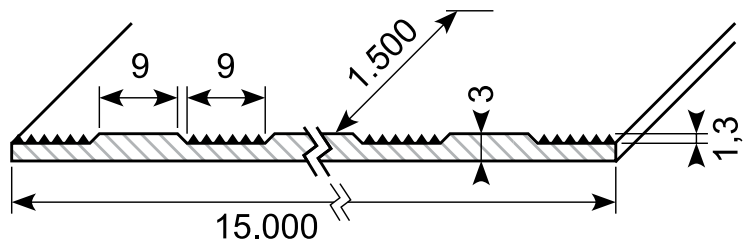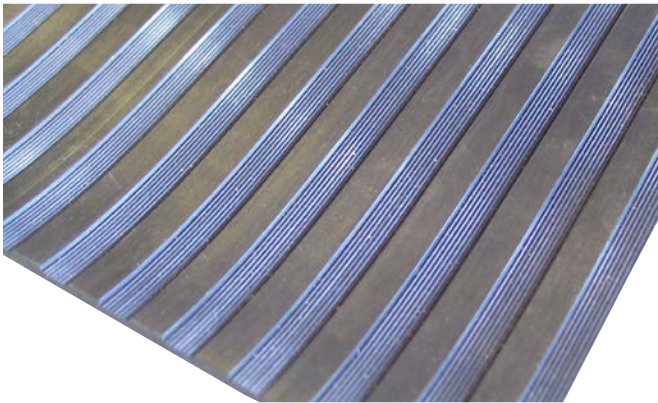Quality: Kommerciel *Commercial*



Varenr. Item no.	Bredde Width	Længde Length	Tykkelse Thickness	Materiale Material	Indlæg Insertion	Hårdhed Hardness	Densitet Density	Forlængelse Elongation	Arbejds- temperatur Working temperature	Trækstyrke Tensile strength
38.418	1.500 mm	15.000 mm	3 mm	NR / SBR	0	SH 70	1,6 g/cm ³	280%	-10 +70 °C	3,5 MPa
38.418N	1.500 mm	15.000 mm	3 mm	NBR	0	SH 70	1,45 g/cm ³	250%	-10 +70 °C	6 MPa

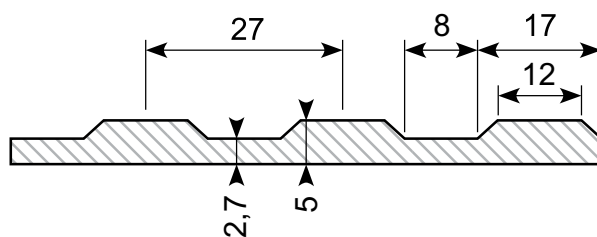
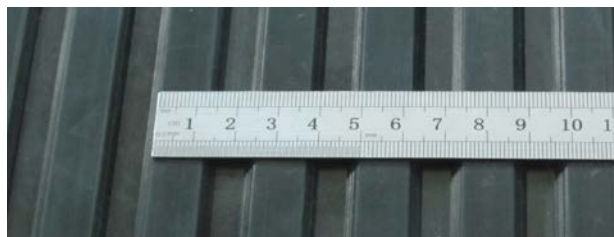
Wide-ribbed bus mat

Recommended for floors and walls for buses, boats, animal transport, work shops

Material: SBR = Natur SBR

Colour: Sort *black*

Quality: Kommerciel *Commercial*



Varenr. <i>Item no.</i>	Bredde <i>Width</i>	Længde <i>Length</i>	Tykkelse <i>Thickness</i>	Indlæg <i>Insertion</i>	Hårdhed <i>Hardness</i>	Densitet <i>Density</i>	Forlængelse <i>Elongation</i>	Arbejds- temperatur <i>Working temperature</i>	Trækstyrke <i>Tensile strength</i>
38.434A	1.200 mm	10.000 mm	5 mm	0	SH 65-70	1,5 g/cm ³	200%	-25 +70 °C	3 MPa

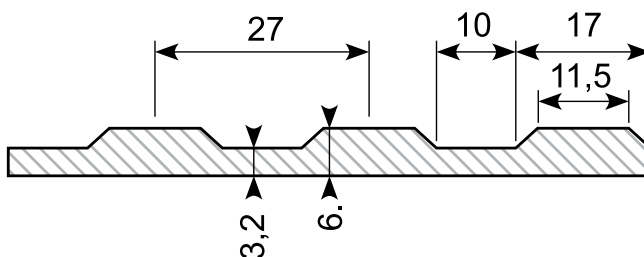
Wide-ribbed bus mat

Recommended for floors and walls for buses, boats, animal transport, work shops

Material: SBR = Natur SBR

Colour: Sort *black*

Quality: Kommerciel *Commercial*



Udgår når solgt

Discontinued when sold

Varenr. <i>Item no.</i>	Bredde <i>Width</i>	Længde <i>Length</i>	Tykkelse <i>Thickness</i>	Indlæg <i>Insertion</i>	Hårdhed <i>Hardness</i>	Densitet <i>Density</i>	Forlængelse <i>Elongation</i>	Arbejds- temperatur <i>Working temperature</i>	Trækstyrke <i>Tensile strength</i>
38.434	1.200 mm	10.000 mm	6 mm	0	SH 65-70	1,5 g/cm ³	200%	-25 +70 °C	3 MPa

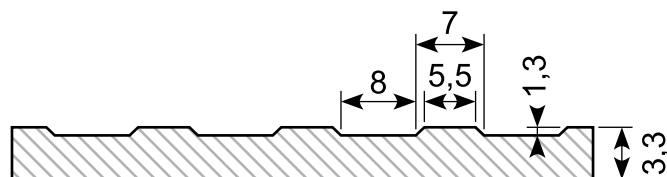
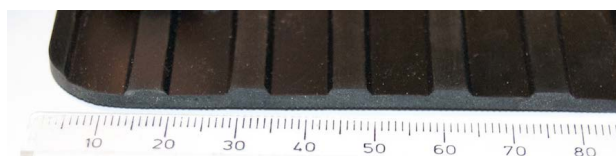
Wide-ribbed light XL bus mat

Recommended for floors and walls for buses, boats, animal transport, workshops.

Material: NR/SBR = Natur SBR

Colour: Sort *black*

Quality: Kommerciel *Commercial*



Varenr. <i>Item no.</i>	Bredde <i>Width</i>	Længde <i>Length</i>	Tykkelse <i>Thickness</i>	Indlæg <i>Insertion</i>	Hårdhed <i>Hardness</i>	Densitet <i>Density</i>	Forlængelse <i>Elongation</i>	Arbejds- temperatur <i>Working temperature</i>	Trækstyrke <i>Tensile strength</i>
38.419C	1.400 mm	20.000 mm	3 (3,3) mm	0	SH 65	1,5 g/cm ³	200%	-25 +70 °C	3 MPa
38.435C <i>Discontinued when sold</i>	1.600 mm	10.000 mm	5 mm	0	SH 65	1,5 g/cm ³	200%	-25 +70 °C	3 MPa

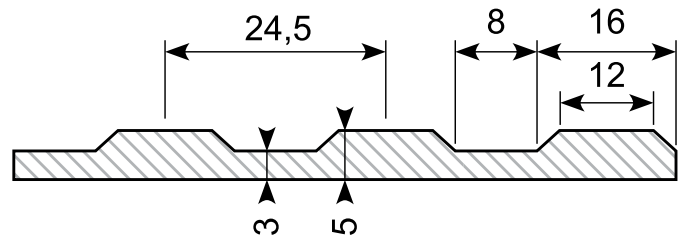
Wide-ribbed bus mat

Recommended for floors and walls for buses, boats, animal transport, workshops.

Material: NR/SBR = Natur / SBR

- **Nyt gummi** *New rubber*: ingen regenereret gummi anvendt.
No regenerated rubber used.
- **C**: Kommerciel kvalitet *Commercial quality*

Colour: Sort *black*



Varenr. <i>Item no.</i>	Bredde <i>Width</i>	Længde <i>Length</i>	Tykkelse <i>Thickness</i>	Indlæg <i>Insertion</i>	Kvalitet <i>Quality</i>	Hårdhed <i>Hardness</i>	Densitet <i>Density</i>	Forlængelse <i>Elongation</i>	Arbejds- temperatur <i>Working temperature</i>	Træk- styrke <i>Tensile strength</i>
38.420CX <i>Discontinued when sold</i>	2.000 mm	10.000 mm	5 mm	0	Commercial	SH 65	1,45 g/cm ³	150%	-30 +100 °C	3 MPa
38.420X	2.000 mm	10.000 mm	5 mm	0	New rubber	SH 65	1,35 g/cm ³	200%	-30 +100 °C	5 MPa
38.420XL	2.000 mm	20.000 mm	5 mm	0	New rubber	SH 65	1,35 g/cm ³	200%	-30 +100 °C	5 MPa

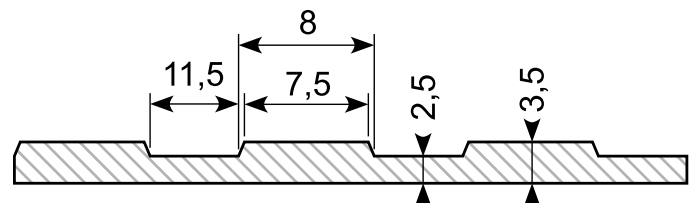
Wide-ribbed bus mat

Recommended for floors and walls for buses, boats, animal transport, workshops.

Material: NR/SBR = Natur / SBR

- **Nyt gummi** *New rubber*: ingen regenereret gummi anvendt.
No regenerated rubber used.
- **C**: Kommerciel kvalitet *Commercial quality*

Colour: Sort *black*



Varenr. <i>Item no.</i>	Bredde <i>Width</i>	Længde <i>Length</i>	Tykkelse <i>Thickness</i>	Indlæg <i>Insertion</i>	Kvalitet <i>Quality</i>	Hårdhed <i>Hardness</i>	Densitet <i>Density</i>	Forlængelse <i>Elongation</i>	Arbejds- temperatur <i>Working temperature</i>	Træk- styrke <i>Tensile strength</i>
38.419A	2.000 mm	10.000 mm	3,5 mm	0	New rubber	SH 65	1,45 g/cm ³	280%	-30 +100 °C	5 MPa
38.436C <i>Discontinued when sold</i>	2.000 mm	10.000 mm	5 mm	0	Commercial	SH 65	1,45 g/cm ³	150%	-30 +100 °C	3 MPa

Checker mat

Checker mat for industrial floors and machine areas, warehouses and trafficked areas. Non-slip surface.

Material:

- **NBR:** Oil resistant
- **Commercial 1:** NR / SBR - commercial quality
- **Commercial 2:** NR / SBR - commercial quality

Colour: Sort *Black*



Varenr. <i>Item no.</i>	Bredde <i>Width</i>	Længde <i>Length</i>	Tykkelse <i>Thickness</i>	Indlæg <i>Insertion</i>	Kvalitet <i>Quality</i>	Hårdhed <i>Hardness</i>	Densitet <i>Density</i>	Forlængelse <i>Elongation</i>	Arbejds- temperatur <i>Working temperature</i>	Træk- styrke <i>Tensile strength</i>
38.425-3C	1.400 mm	10.000 mm	3 mm	0	Commercial 1	SH 65	1,5 g/cm ³	250%	-10 +70 °C	3 MPa
38.425-5C	1.400 mm	10.000 mm	5 mm	0	Commercial 1	SH 65	1,5 g/cm ³	250%	-10 +70 °C	3 MPa
38.425N-3	1.400 mm	10.000 mm	3 mm	0	NBR	SH 70	1,45 g/cm ³	250%	-10 +70 °C	6 MPa
38.425N-5	1.400 mm	10.000 mm	5 mm	0	NBR	SH 70	1,45 g/cm ³	250%	-10 +70 °C	6 MPa
38.426-3CX	1.600 mm	10.000 mm	3 mm	0	Commercial 1	SH 65	1,5 g/cm ³	250%	-10 +70 °C	3 MPa
38.426-3C	2.000 mm	10.000 mm	3 mm	0	Commercial 2	SH 70	1,5 g/cm ³	180%	-10 +70 °C	3 MPa
38.426-5CX	1.600 mm	10.000 mm	5 mm	0	Commercial 1	SH 65	1,5 g/cm ³	250%	-10 +70 °C	3 MPa
38.426-5C	2.000 mm	10.000 mm	5 mm	0	Commercial 2	SH 70	1,5 g/cm ³	180%	-10 +70 °C	3 MPa
38.426-8C	2.000 mm	10.000 mm	8 mm	0	Commercial 1	SH 65	1,5 g/cm ³	250%	-10 +70 °C	3 MPa

Checker mat

Checker mat for industrial floors and machine areas, warehouses and trafficked areas. Non-slip surface.

Material:

- **New rubber 1:** , NR/SBR, no regenerated rubber used.
- **New rubber 2:** , NR/SBR, no regenerated rubber used.

Colour: Sort *black*

Varenr. <i>Item no.</i>	Bredde <i>Width</i>	Længde <i>Length</i>	Tykkelse <i>Thickness</i>	Indlæg <i>Insertion</i>	Kvalitet <i>Quality</i>	Hårdhed <i>Hardness</i>	Densitet <i>Density</i>	Forlængelse <i>Elongation</i>	Arbejds- temperatur <i>Working temperature</i>	Træk- styrke <i>Tensile strength</i>
38.425-3	1.400 mm	10.000 mm	3 mm	0	New rubber 1	SH 70	1,6 g/cm ³	350%	-10 +70 °C	5 MPa
38.425-5	1.400 mm	10.000 mm	5 mm	0	New rubber 1	SH 70	1,6 g/cm ³	350%	-10 +70 °C	5 MPa
38.426-3XL	1.800 mm	10.000 mm	3 mm	0	New rubber 2	SH 65	1,35 g/cm ³	250%	-10 +70 °C	5 MPa
38.426-3	2.000 mm	10.000 mm	3 mm	0	New rubber 2	SH 65	1,35 g/cm ³	250%	-10 +70 °C	5 MPa
38.426-5	2.000 mm	10.000 mm	5 mm	0	New rubber 2	SH 65	1,35 g/cm ³	250%	-10 +70 °C	5 MPa

Diamond rubber mat

Mat for industrial floors and machine areas, warehouses and trafficked areas. Non-slip surface.


Material:

- **Commercial:** SBR
- **PAK free:** TPE/SBR

Colour: Sort *Black*



Varenr. <i>Item no.</i>	Bredde <i>Width</i>	Længde <i>Length</i>	Tykkelse <i>Thickness</i>	Indlæg <i>Insertion</i>	Kvalitet <i>Quality</i>	Hårdhed <i>Hardness</i>	Densitet <i>Density</i>	Forlængelse <i>Elongation</i>	Arbejds- temperatur <i>Working temperature</i>	Træk- styrke <i>Tensile strength</i>
38.431	1.400 mm	10.000 mm	3 mm	0	Commercial	SH 70	1,5 g/cm ³	200%	-20 +70 °C	3 MPa
38.431-3C	1.800 mm	10.000 mm	3 mm	0	Commercial	SH 65	1,5 g/cm ³	180%	-20 +70 °C	3 MPa
38.431-5C	1.800 mm	10.000 mm	5 mm	0	Commercial	SH 65	1,5 g/cm ³	180%	-20 +70 °C	3 MPa
38.431-3	1.800 mm	10.000 mm	3 mm	0	PAK free <i>Odour free</i>	SH 65	1,4 g/cm ³	200%	-20 +70 °C	3 MPa
38.431-5	1.800 mm	10.000 mm	5 mm	0	PAK free <i>Odour free</i>	SH 65	1,4 g/cm ³	200%	-20 +70 °C	3 MPa

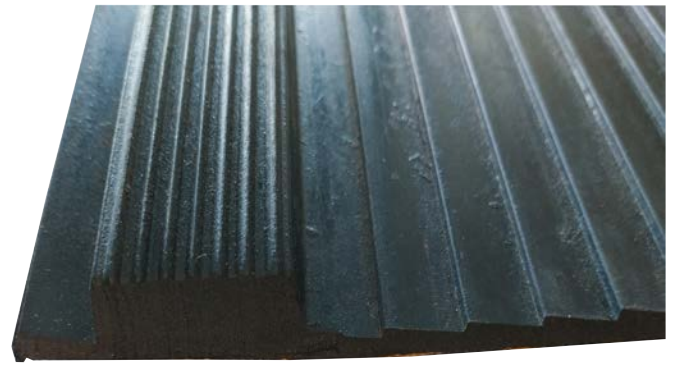

37.250

Rear board mat, 12 mm

Materiale *Material*: SBR

Hårdhed *Hardness*: SH A 65

Densitet *Density*: 1,25 g/cm³

Forlængelse *Elongation*: 400%

Arbejdstemperatur *Working temperature*: -30 +80 °C

Trækstyrke *Tensile strength*: 8 MPa

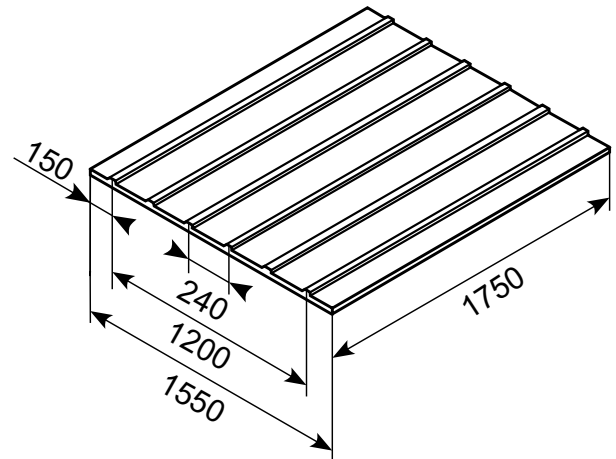
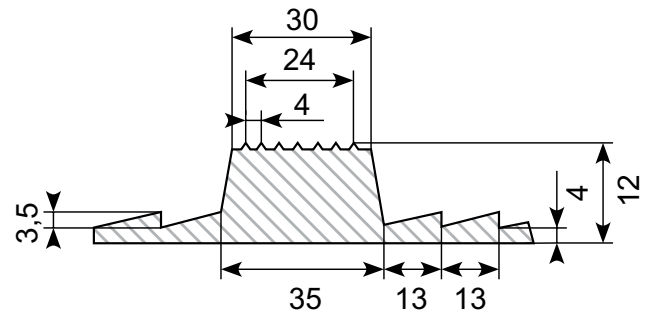
Tykkelse *Thickness*: 7,5/12 mm

Ribbredde *Rib width*: 30-35 mm

Bredde *Width*: 1.750 mm

Højde *Height*: 1.550 mm

Vægt *Weight*: 28 kg



37.251

Rear board mat, 20 mm

Materiale *Material*: SBR

Hårdhed *Hardness*: SH A 65

Densitet *Density*: 1,50 g/cm³

Forlængelse *Elongation*: 300%

Arbejdstemperatur *Working temperature*: -30 +70 °C

Trækstyrke *Tensile strength*: 5 MPa

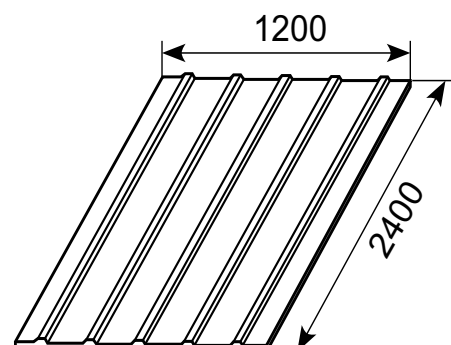
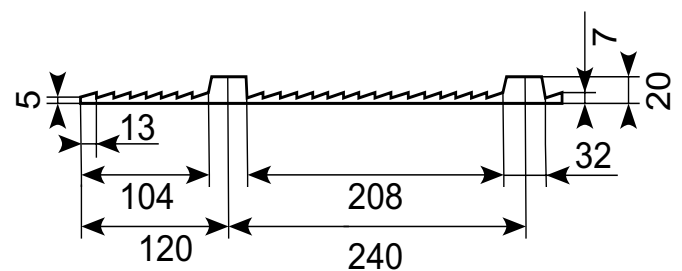
Tykkelse *Thickness*: 7,5/20 mm

Ribbredde *Rib width*: 28-32 mm

Bredde *Width*: 2.400 mm

Højde *Height*: 1.200 mm

Vægt *Weight*: 38-40 kg




Rubber mats

Our rubber mats can be used on bus floors, vans or to collect dirt from shoes in e.g. aisles and entrances. The rubber mats can have many different functions. Some of our rubber mats are vibration absorbing and can therefore be placed under machines. Other mats protect against static electricity. We also offer mats that improve ergonomics of work performed while standing and reduce the risk of slipping on slippery floors.

We have mats and rubber sheets for many different purposes, in different sizes, at different prices and in different qualities from all over the world.

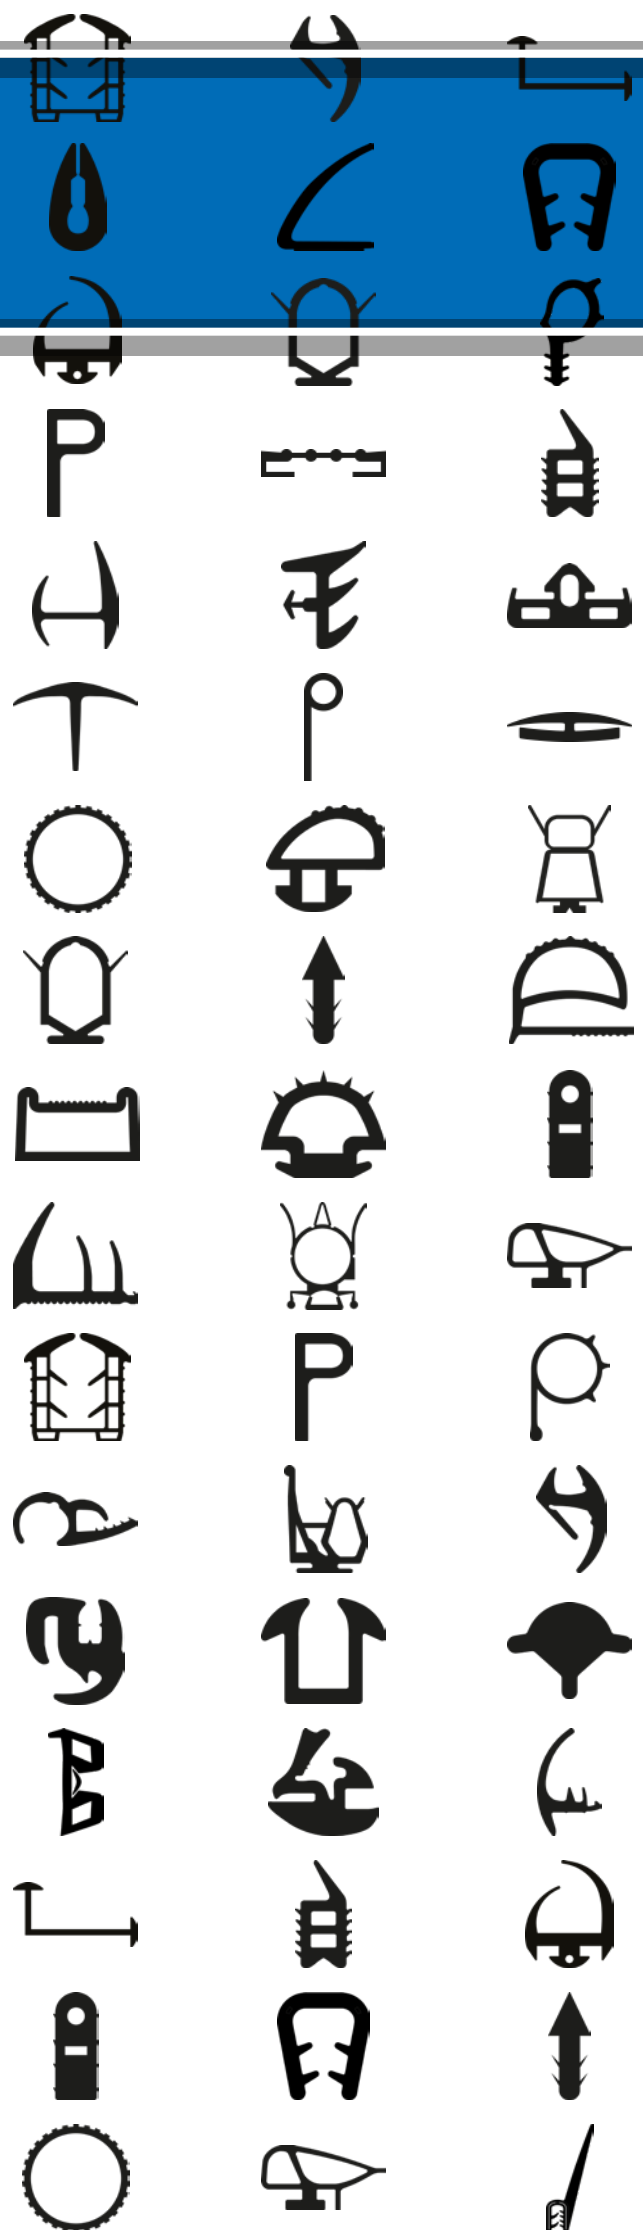The rubber mats, which come in rolls, can be cut in the desired length.



Ergo Solid

Ergo Solid is a modular mat made of a special nitrile rubber compound that makes it both heat resistant and resistant to oils, greases and chemicals. The modules can be easily assembled to the desired size and can also be supplemented with chamfered edges to reduce the risk of tripping. The edges are also available in yellow for marking work areas etc. Ergo solid is a durable mat with a non-slip surface. Sturdy knobs on the underside lift the mat, providing drainage and ventilation to the floor. Ergo solid has a very good carrying capacity and a closed surface that makes it easy to keep clean.

Material: Nitril

Colour: Sort *Black*



Varenr. <i>Item no.</i>	Beskrivelse <i>Description</i>	Størrelse <i>Size</i>	Vægt <i>Weight</i>
38.9726230	Ergo Solid måtte <i>Ergo Solid mat</i>	910 x 910 x 17 mm	8,2 kg
38.9730030 ●	Sort skråkant - han <i>Black chamfer - male</i>	76 x 910 mm	1 kg
38.9730030S ●	Sort skråkant - hun <i>Black chamfer - female</i>	76 x 910 mm	
38.9750030	Samlestykke <i>Connecting piece</i>	31 x 230 mm	0,1 kg

NOTE: For edging around the entire mat, 2 male and 2 female chamfers are used.
The basic mat has external tabs on 2 sides.

Ergo Bubble

The Ergo Bubble mat is a traditional elastic and durable bubble mat made of foam-polyurethane that is both durable and holds its shape. The mat's surface and elasticity help to stimulate blood circulation and muscle function in the feet, legs and back and thus helping to prevent overuse injuries. Ergo Bubble is suitable for use anywhere in dry environments. The chamfered edges minimise the risk of tripping, while the mat's surface provides good slip resistance. The mat is available in several standard sizes and can also be made to your special dimensions.

Material: Polyurethan

Colour: *Dark graphite*

The mat is also available in oil-resistant NBR in the sizes:

650 x 1.400 mm / 950 x 1.500 mm / 950 x 1.800 mm



Varenr. <i>Item no.</i>	Størrelse <i>Size</i>	Vægt <i>Weight</i>
38.8100110	650 x 950 x 14 mm	3 kg
38.8100310	650 x 1.850 x 14 mm	6 kg
38.8103110 *	950 x 1.250 x 14 mm	6 kg

* Skaffevare *Special order item*

Ergo Durk

Ergo Durk is a classic work mat made of nitrile rubber with a surface patterned like the deck of a ship. The underside is made of EPDM cellular rubber with closed cells. This gives you a durable and hard-wearing mat with a non-slip surface that is resistant to oil, grease and chemicals. The edges are chamfered to reduce the risk of tripping and to make it easy to drive up a trolley without getting stuck. Available in standard mat from roll or in custom sizes acc. to drawing, all with chamfered edges. Ergo Durk ESD also protects sensitive electronics from static electricity. The mat is approved according to SP 2472.

Material: Nitril / EPDM

Colour: Sort *Black*

Varenr. <i>Item no.</i>	Størrelse <i>Size</i>	Vægt <i>Weight</i>
38.5017530	1.400 x 1.000 x 11 mm	7 kg
38.5017530A *	1.400 x 10.000 x 11 mm	66 kg



Ergo Dome

A durable mat in pure natural rubber. Ergo Dome is suitable for all working environments, from dry to heavy industries. The mat can withstand oil, grease and chemical substances. The bulge-shaped surface stimulates blood circulation and reduces overuse injuries.

Colour: Sort *Black*

Måtten kan også skaffes i oliebestandig NBR i størrelserne:

The mat is also available in oil-resistant NBR in the sizes:

650 x 1.400 mm / 950 x 1.500 mm / 950 x 1.800 mm

Varenr. <i>Item no.</i>	Størrelse <i>Size</i>	Vægt <i>Weight</i>
38.410200 *	600 x 900 mm	3,2 kg
38.410201	900 x 1.200 mm	4 kg



Ergo ring

Ergo Ring is a classic ring rubber mat that effectively drains away liquid and spills, providing a non-slip surface to stand on. It can also be used as a rough splash mat in entrance areas. The open ring construction effectively scrapes off all coarse dirt, providing maximum slip resistance and a good strain relief. Nails on the back hold the mat in place and allow liquid to pass through.

Material: NR

Colour: Black

The mat is also available in oil-resistant NBR in the sizes:

400 x 500 mm / 600 x 800 mm



Varenr. <i>Item no.</i>	Beskrivelse <i>Description</i>	Størrelse <i>Size</i>	Vægt <i>Weight</i>
38.9117630	Ergo ring	800 x 1.200 x 23 mm	11 kg
38.9117631	Ergo ring	1.000 x 1.500 x 23 mm	21 kg
38.9110030	Samlestykke <i>Connecting piece</i>		

Ergo Ease

Ergo Ease is a modular mat made of nitrile rubber which makes it both heat resistant and resistant to oil, grease and chemicals. The sheets can be assembled to the desired size without the use of connectors. The mat can withstand heavy loads and is suitable for most environments, both dry and wet. It provides ergonomic relief for feet, legs and back as well as high slip resistance. Stable knobs on the underside lift the mat, providing drainage and ventilation to the floor. Chamfered edges minimise the risk of tripping. The edges are also available in yellow for marking work areas etc.

Material: Nitril

Colour:

Black (the mat is also available in terracotta red)

Varenr. <i>Item no.</i>	Størrelse <i>Size</i>	Vægt <i>Weight</i>
38.9716230	910 x 910 x 17 mm	8,2 kg





Ergo Classic

Ergo Classic is a vinyl work mat with a ribbed surface that provides good slip resistance (it meets the R10 DIN 51130 standard for slip resistance). The mat's microcellular construction stimulates blood circulation in the feet and legs while providing good ergonomic support for the legs, back and hips. It is suitable for dry environments such as shops, warehouses and in front of work desks. Chamfered edges minimise the risk of tripping. Ergo Classic comes with a 3-year full wear warranty. Easy to fit even with a standard carpet cutter.

Material: Vinyl

Colour: Grå *Grey*

Varenr. <i>Item no.</i>	Størrelse <i>Size</i>	Vægt <i>Weight</i>
38.5501110	610 x 18.300 x 9 mm	36 kg
38.5501210	910 x 18.300 x 9 mm	50 kg
38.5501310 *	1.220 x 18.300 x 9 mm	66 kg

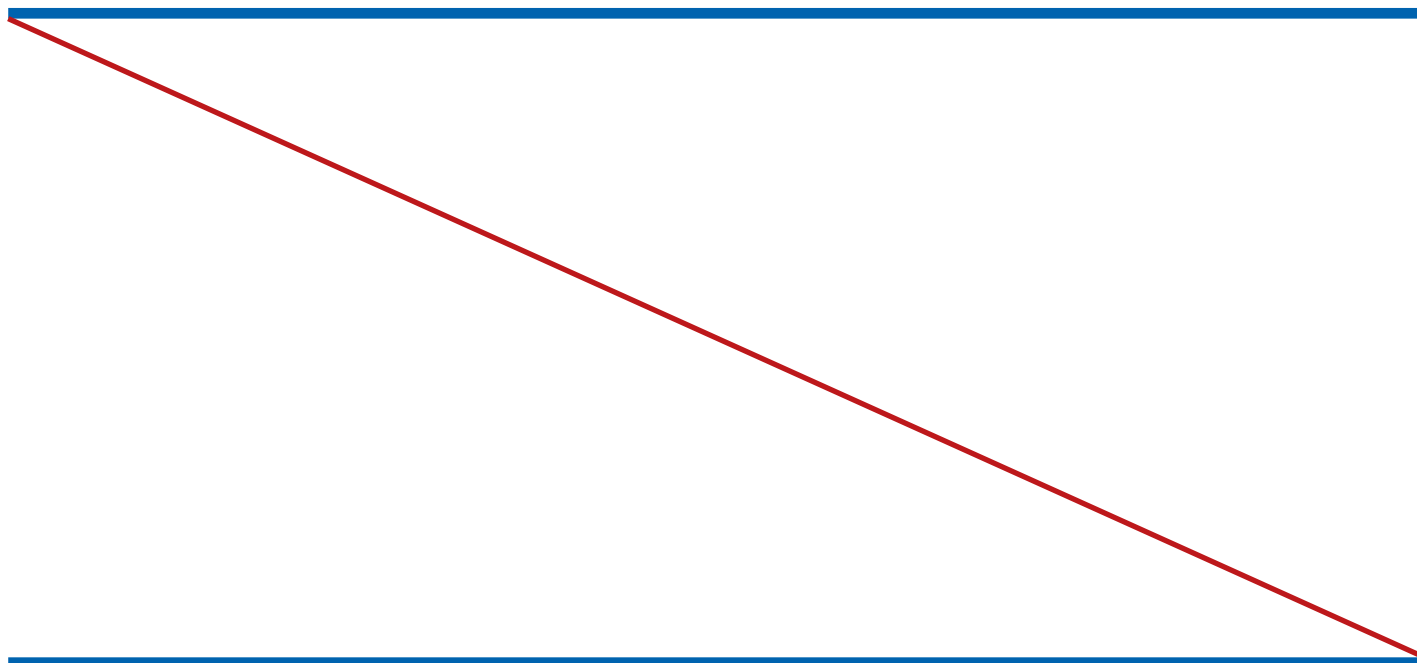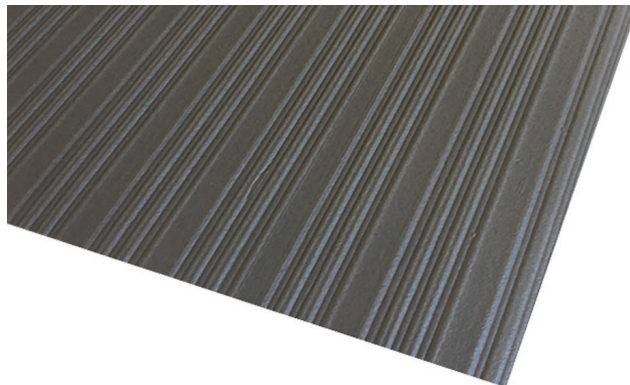


Dirt trapper mat, diamond

Extremely durable mat with rubber backing and coarse patterned polypropylene yarn top of highest quality. Effectively scrapes away coarse dirt and absorbs moisture. It has chamfered edges that retains dirt and reduces the risk of tripping. Suitable for both domestic and high-traffic public environments. Can be washed with high-pressure cleaner.

Material: Polypropylen

Colour: *Blue (the mat is also available in grey)*

Varenr. <i>Item no.</i>	Størrelse <i>Size</i>	Vægt <i>Weight</i>
38.623752	600 x 900 x 9 mm	3 kg
38.623750 *	900 x 1.500 x 9 mm	6 kg
38.623764 *	1.200 x 1.800 x 9 mm	9 kg


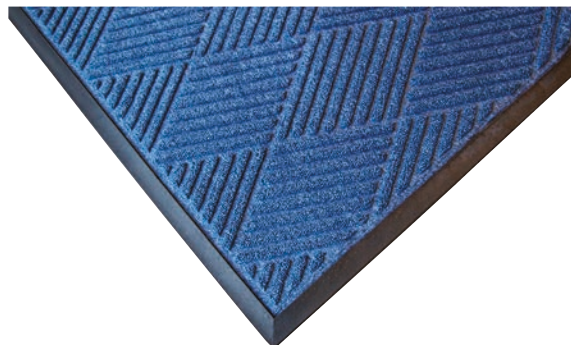


Vibration mat

Black commercial rubber plate. To be used between machines and floor in order to minimize and absorb vibrations. Grooves on both sides. Carrying capacity of 5 kg/cm².

Material: NR/CR

Varenr. Item no.	Tykkelse Thickness	Bredde Width	Længde Length	Indlæg Insertion	Hårdhed Hardness	Vægt Weight
37.400	8,5 mm	500 mm	500 mm	0	SH 45 - 50	5 kg / cm ²

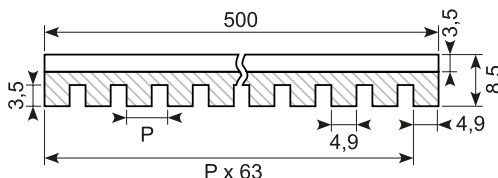


Cow mat

Material: NR/SBR

Udgår når solgt

Discontinued when sold

Varenr. Item no.	Bredde Width	Længde Length	Tykkelse Thickness	Hårdhed Hardness	Densitet Density	Indlæg Insertion	Forlæn- gelse Elongation	Træk- styrke Tensile strength
38.440-6	2.000 mm	30.000 mm	6 mm	SH 65	1,35 g/cm ³	Nej No	250 %	5 MPa
38.440-6B	2.000 mm	30.000 mm	6 mm	SH 65	1,35 g/cm ³	Ja Yes	250 %	5 MPa
38.440-8	2.000 mm	30.000 mm	8 mm	SH 65	1,35 g/cm ³	Nej No	250 %	5 MPa
38.440-8X	1.250 mm	10.000 mm	8 mm	SH 65	1,45 g/cm ³	Ja Yes		4 MPa
38.440-8A	1.750 mm	21.000 mm	6 mm	SH 65	1,45 g/cm³	Ja Yes		4 MPa
38.440-8A	1.750 mm	21.000 mm	8 mm	SH A 65	1,45 g/cm ³	Ja Yes		4 MPa




Cow mat

Material: NR/SBR

Surface: circles without insert, bottom: ribbed in longitudinal direction.

Varenr. Item no.	Tykkelse Thickness	Bredde Width	Længde Length
37.261 *	10 mm	2.000 mm	4.870 mm
37.262 *	10 mm	2.000 mm	6.522 mm
37.260	10 mm	2.000 mm	20.000 mm





Cow mat

Material: NR/SBR


Surface: circles without insert, bottom: ribbed in longitudinal direction.

Varenr. Item no.	Tykkelse Thickness	Bredde Width	Længde Length
37.263	16 mm	2.150 mm	10.000 mm



Trailer mat


Varenr. Item no.	Bredde Width	Længde Length	Tykkelse Thickness	Hårdhed Hardness	Densitet Density	Arbejds- temperatur Working temperature	Træk- styrke Tensile strength
38.422-1750 *	1.750 mm	21.000 mm	6 mm	SH 65	1,4 g/cm³	-25 +70 °C	12 MPa
38.423-1750 *	1.750 mm	21.000 mm	8 mm	SH 65	1,4 g/cm ³	-25 +70 °C	12 MPa
38.424-1800 *	1.800 mm	21.000 mm	8 mm	SH 65	1,4 g/cm ³	-25 +70 °C	12 MPa



* Skaffevare Special order item

Soft transparent PVC

Varenr. <i>Item no.</i>	Tykkelse <i>Thickness</i>	Bredde <i>Width</i>	Længde <i>Length</i>	Farve <i>Colour</i>
38.449-750 *	3 mm	750 mm	20.000 mm	
38.449-1200	3 mm	1.200 mm	20.000 mm	Klar <i>Clear</i>
38.449-1600	3 mm	1.600 mm	20.000 mm	Blåtonet <i>Blue tinted</i>
38.450-760 *	4 mm	760 mm	13.000 mm	
38.451-1600	5 mm	1.600 mm	10.000 mm	Blåtonet <i>Blue tinted</i>
38.452-1200 *	7 mm	1.200 mm	10.000 mm	

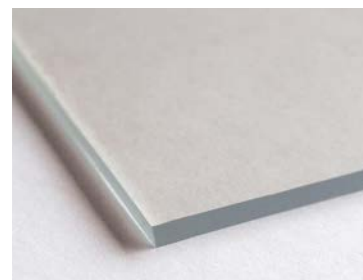


Polyurethane plates

Bredde *Width*: 2.000 mm

Længde *Length*: 1.000 mm

Varenr. <i>Item no.</i>	Tykkelse <i>Thickness</i>	Hårdhed <i>Hardness</i>	Densitet <i>Density</i>	Forlæn- gelse <i>Elonga- tion</i>	Træk- styrke <i>Tensile strength</i>	Rivstyrke <i>Tear strength</i>	Arbejds- temperatur <i>Working temperature</i>
38.430-5/70	5 mm	SH 70	1,25 g/cm ³	500-600%	30 MPa	50 KN/m	-50 +100 °C
38.430-5/80	5 mm	SH 80	1,25 g/cm ³	450-500%	35 MPa	35 KN/m	-50 +100 °C
38.430-8/70	8 mm	SH 70	1,25 g/cm ³	500-600%	30 MPa	50 KN/m	-50 +100 °C
38.430-8/90	8 mm	SH 90	1,25 g/cm ³	400-450%	40 MPa	90 KN/m	-50 +100 °C
38.430-10/70	10 mm	SH 70	1,25 g/cm ³	500-600%	30 MPa	50 KN/m	-50 +100 °C
38.430-10/90	10 mm	SH 90	1,25 g/cm ³	400-450%	40 MPa	90 KN/m	-50 +100 °C

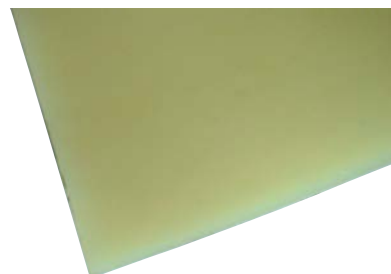

Anti-slip plate

Material: *Rubber granules.*

Varenr. <i>Item no.</i>	Tykkelse <i>Thickness</i>	Bredde <i>Width</i>	Længde <i>Length</i>	Min. ordre
38.14572	8 mm	500 mm	5.000 mm	5 m
38.14574	5 mm	1.250 mm	10.000 mm	10 m
38.14574/3	3 mm	1.250 mm	10.000 mm	10 m



38.9971010

Grass mat, grey
900 mm x 16 m



*

38.9971020

Grass mat, green
900 mm x 16 m




*

* Skaffevare *Special order item*

Semperit

Colour: Sort *Black*



Varenr. <i>Item no.</i>	Bredde <i>Width</i>	Længde <i>Length</i>	Tykkelse <i>Thickness</i>	Materiale <i>Material</i>	Hårdhed <i>Hard- ness</i>	Indlæg <i>Insertion</i>
38.1215N	1.400 mm	20.000 mm	1,5 mm	Nitril	SH 65	1
38.1215	1.400 mm	10.000 mm	1,5 mm	NR / SBR		

Rubber cork

Material: NR / NBR / NR-SBR









Varenr. <i>Item no.</i>	Størrelse <i>Size</i>	Tykkelse <i>Thickness</i>	Kvalitet <i>Quality</i>	Min. ordre
38.201.5 *	1.000 x 1.000	1,5	1.235	100 m ²
38.202 *	1.000 x 1.000	2	1.235	75 m ²
38.203 *	1.000 x 1.000	3	1.235	50 m ²
38.205 *	1.000 x 1.000	5	1.235	30 m ²

Rubber straps

Rubber straps are used everywhere as a flexible fastening. The straps can among other things be used for fastening tarpaulins on agricultural machinery, trucks or advertising boards.

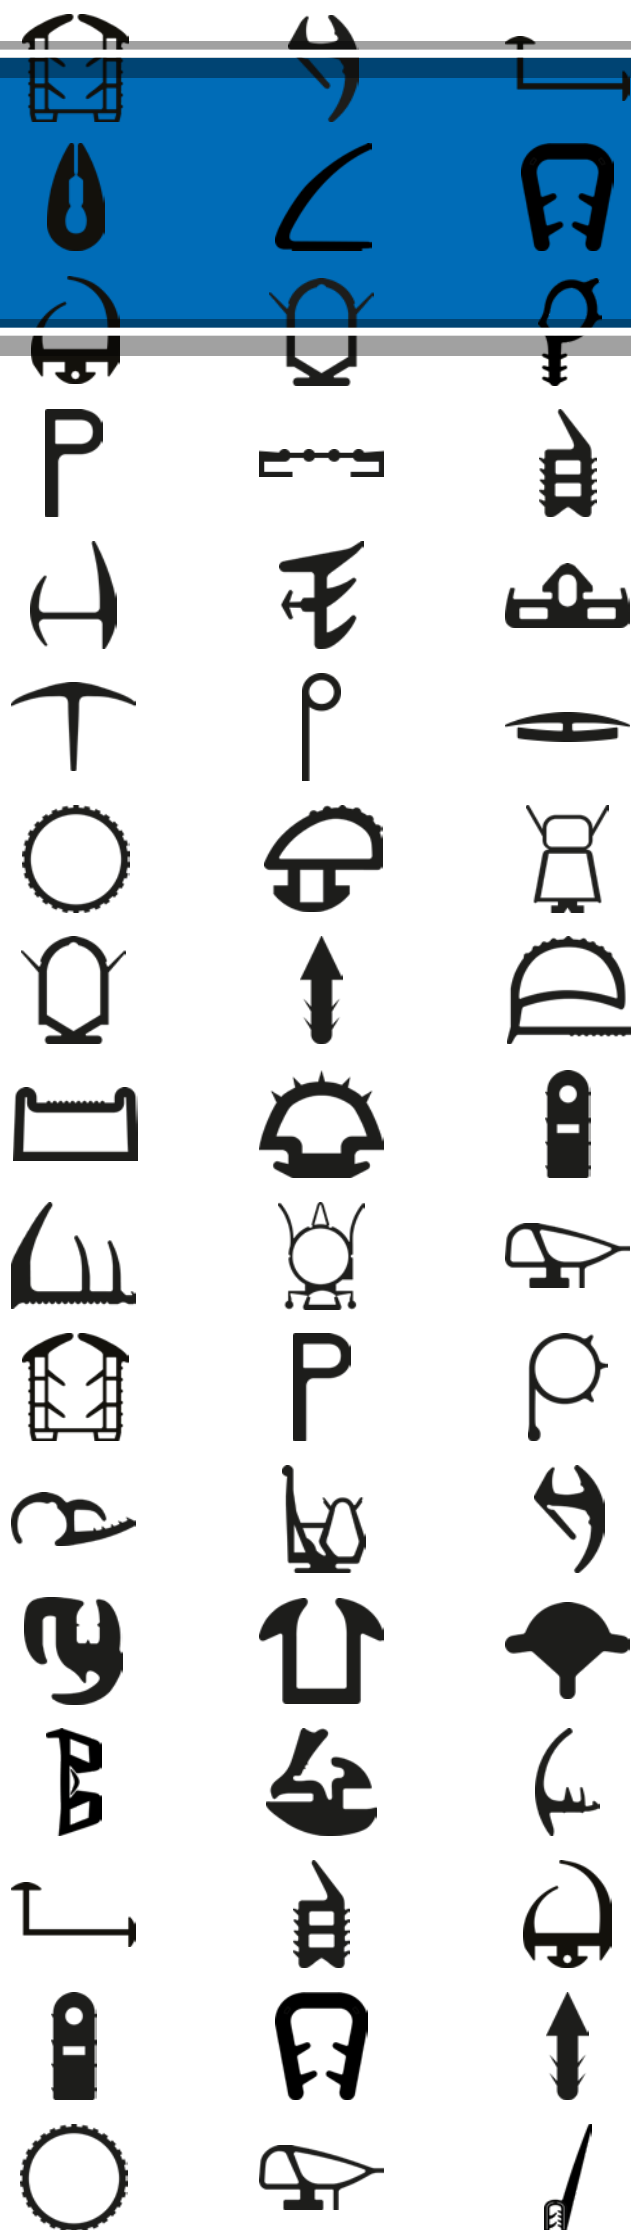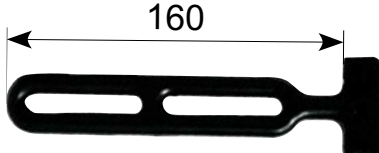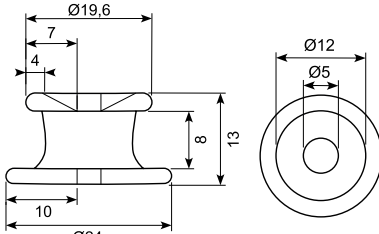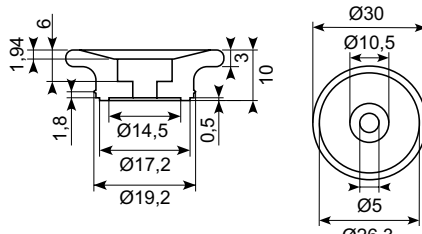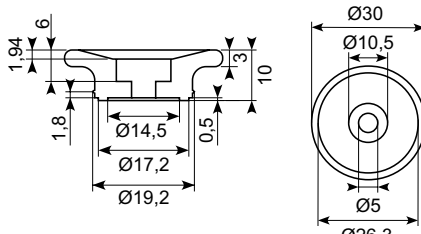We offer rubber straps in different variants - from T-straps or T-ladders to oval straps, luggage straps or ladder straps. We also have straps in long lengths that can be used for fastening in industry.



50.241NR T-strap. Material: NR. Length: 150 mm 	50.242NR T-strap. Material: NR. Length: 250 mm 	
50.245NR Strap with two holes. Material: NR. Length: 160 mm 	50.245H T-stige med 2 huller. Materiale: Hvid EPDM. Længde: 160 mm Strap with 2 holes. White EPDM. Length: 160 mm 	
50.265 Short strap. Material: EPDM. Length: 280 mm 		
50.246NR Strap with three holes. Material: NR. Length: 285 mm 	50.266 Rubber strap, combi. Material: EPDM. Length: 360 mm. 	
50.247NR Gummistrop, kombi. Materiale: NR. Længde: 365 mm / 370 mm Rubber strap, combi. Material: NR. Length: 365 mm / 370 mm 	50.250 Stigestrop. Rulle på 10 m. Materiale: SBR. Tarpaulin strap, 10 m. Material: SBR. 	
50.252J HDPE plastic fastening knob, black. 100 pcs. (Grey: 50.252G). 	50.254J * Black LDPE knob. 1.000 pcs. per bag. LDPE. Min.: 50.000 pcs. 	50.255J Grey PE knob. 1.000 pcs. per bag. LDPE. 

*** Skaffevare Special order item**

50.275 <i>Strap POP. Material: EPDM. Length: 200 mm</i> 	50.276 <i>Strap POP. Material: EPDM. Length: 275 mm</i> 
50.261 <i>Strap, Ø8. Material: EPDM. Length: 200 mm</i> 	50.244NR <i>Strap, 4-holes. Material: NR. Length: 260 mm</i> 
50.271 <i>Strap. Material: EPDM. Length: 270 mm</i> 	
50.269 Ø106 / Ø86. <i>Round strap. Material: EPDM. Ø106 / Ø86.</i> 	50.263 <i>Oval strap, Ø7. Material: EPDM. Length: 200 mm</i> 
50.243NR <i>Oval-shaped strap. Material: NR. Length: 260 mm</i> 	50.267-10 Udgår. <i>Strap. Material: NR. Length: 400 mm. Discontinued.</i> 
50.267NR <i>Strap oval. Material: NR. Length: 400 mm</i> 	50.267 <i>Oval strap. Material: EPDM. Length: 400 mm</i> 
50.263K Løs krog: 50.263KL <i>Oval strap with hook. Material: EPDM. Length: 200 mm</i> Loose hook: 50.263KL 	50.263K-10 <i>Oval strap with hook. Material: NR. Length: 204 mm</i> Discontinued (to be replaced by 50.263KNR) Loose hook: 50.263KL 

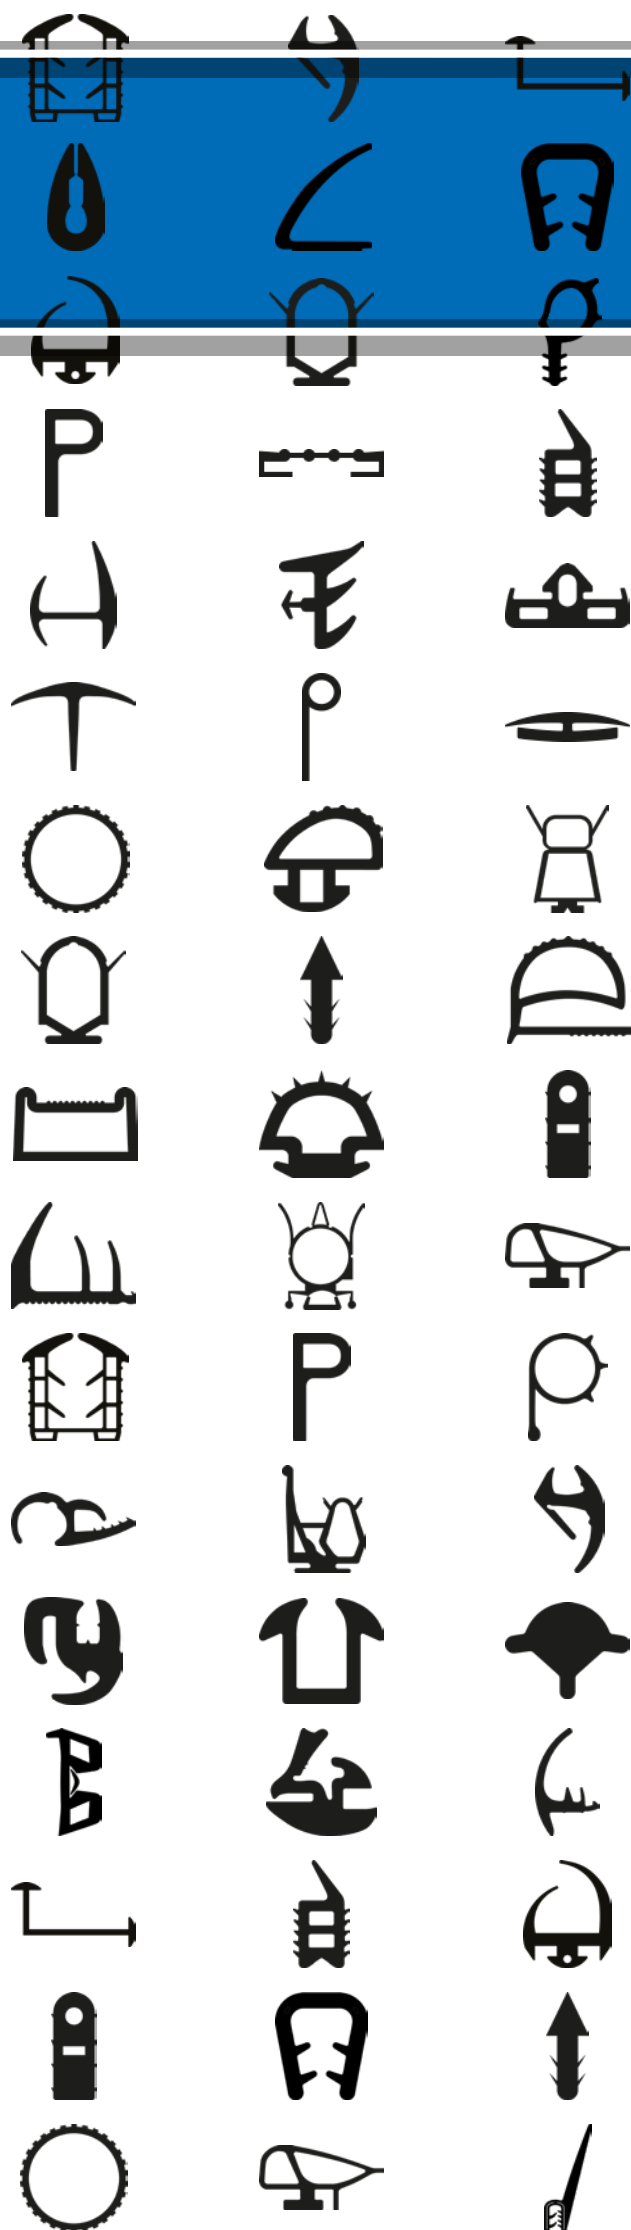
Bagagerem <i>Luggage strap</i>		50.13621	50.280
		<i>Camping strap with hook / eye. 20 x 490 mm.</i> 	<i>Rubber strap for e.g. transport boxes. Total length: 610 mm Length strap: 480 mm</i> 
Varenr. <i>Item no.</i>	Mål <i>Measure</i>		
79.051	600 mm		
79.051A *	700 mm		
79.052	900 mm		
79.053	1.250 mm		
79.054	1.750 mm		
79.054A *	2.800 mm		
79.055 *	3.000 mm		
79.056 *	6.000 mm		

More than 100 years of experience




Bumpers

Bumpers are a simple solution to protect people and equipment.




39.BUMPER

Type A. Black and yellow.
1.000 mm long.
Adhesive.




39.BUMPERB

Type B. Black and yellow.
1.000 mm long.
Adhesive.





39.BUMPERC

Type C. Black and yellow.
1.000 mm long.
Adhesive.




39.BUMPERD

Type D. Black and yellow.
1.000 mm long.
Adhesive.



39.BUMPERE

Type E. Black and yellow.
1.000 mm long.
Adhesive.



52.PPCC720



*

52.PPTLRED



*

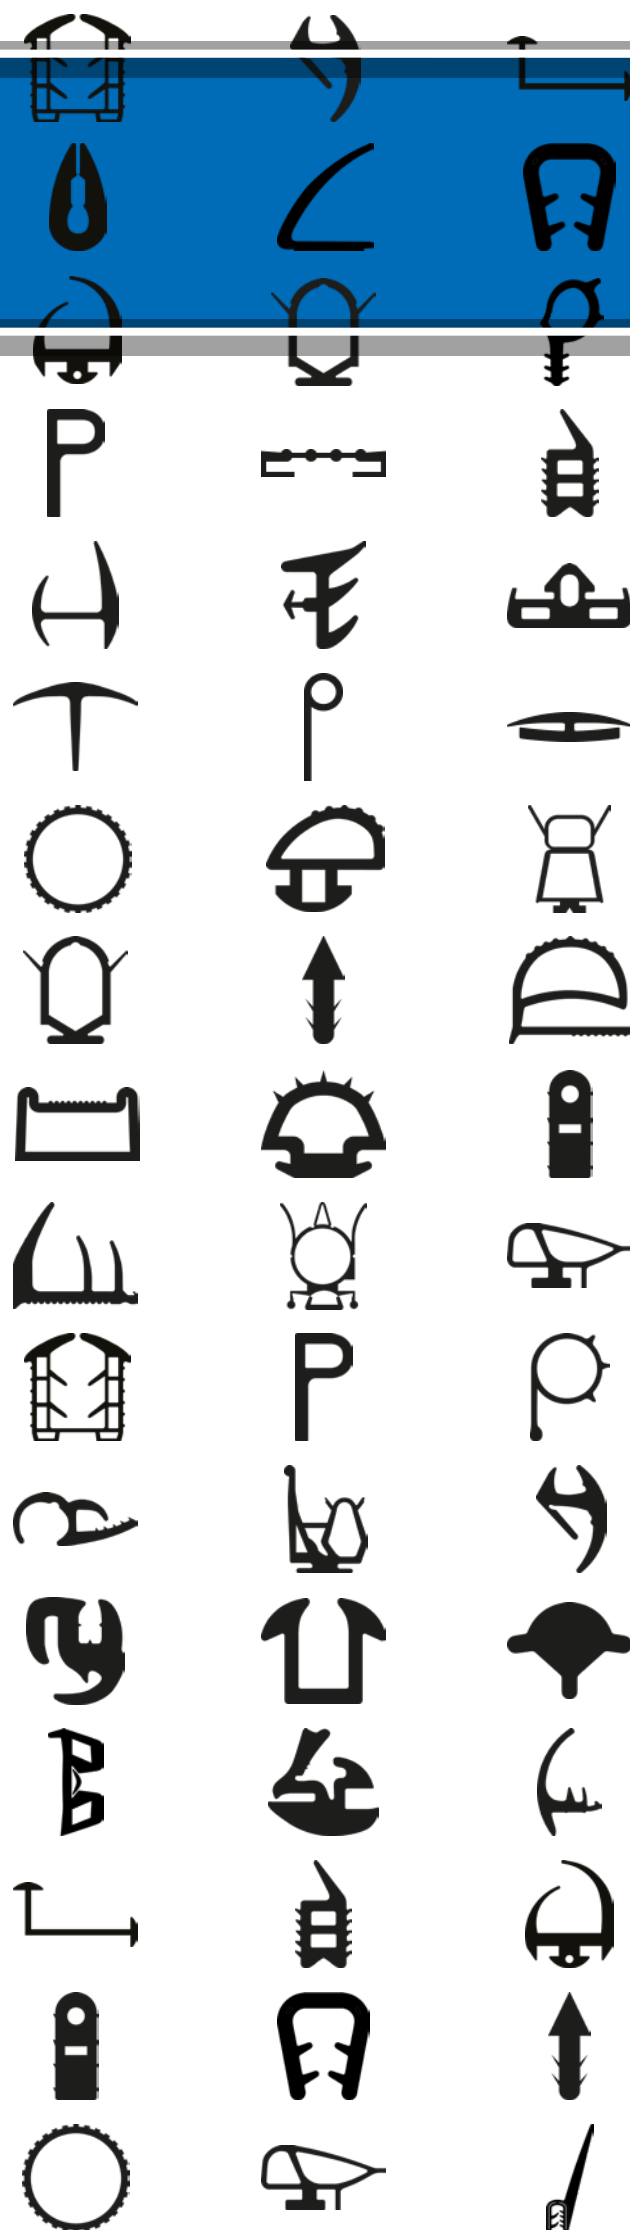
Orange traffic cone, 690 mm. Foldable.
Excl. top blink 52.PPTLRED.

Red warning light for traffic cone 52.PPCC720

* Skaffevare Special order item


Poliall

Poliall hinges are waaterproof continuous hinges that are used as door hinges, folding door constructions and as a hinge for top-hung doors.



Centraflex

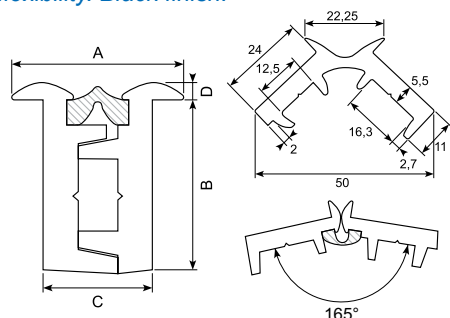
Water-proof continuous hinge with polyester-core and synthetic flanges. 165° / 180° opening. High strength and excellent flexibility. Black finish.



Varenr. Item no.	A	B	C	D	L
20.6020 *	28 mm	23 mm	16 mm	4 mm	2.000 mm
20.6025	28 mm	23 mm	16 mm	4 mm	2.500 mm
20.6030	28 mm	23 mm	16 mm	4 mm	3.000 mm


Poliall

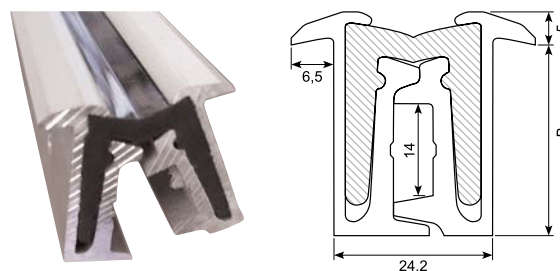Waterproof poliall continuous hinge. PU core and aluminium flanges. Predrilled with 5 mm holes in flange. Can open 180°.




Varenr. Item no.	B	Længde Length
54.261100 *	24 mm	2.400 mm
54.261120 *	24 mm	2.700 mm
54.261130 *	24 mm	4.000 mm

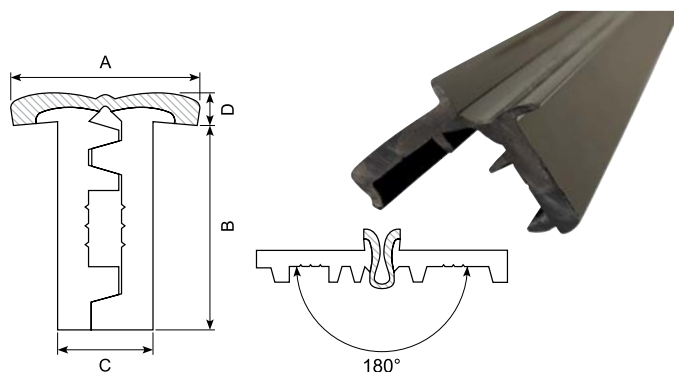Centraflex




Varenr. Item no.	A	B	C	D	L
20.6120 *	30 mm	34 mm	16 mm	4,5 mm	2.000 mm
20.6125 *	30 mm	34 mm	16 mm	4,5 mm	2.500 mm
20.6130 *	30 mm	34 mm	16 mm	4,5 mm	3.000 mm

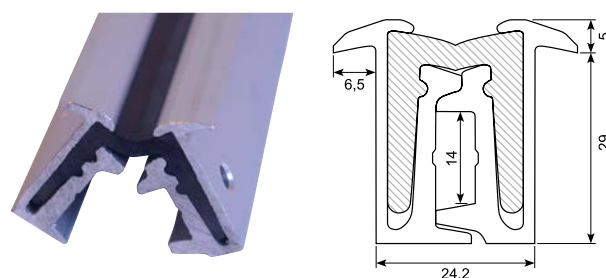Poliall



Varenr. Item no.	B	L
54.261700J-5	29 mm	2.400 mm
54.261720J-5	29 mm	2.700 mm
54.261740J-5	29 mm	3.000 mm
54.261760J-5	29 mm	3.200 mm
54.261780J-5	29 mm	4.000 mm

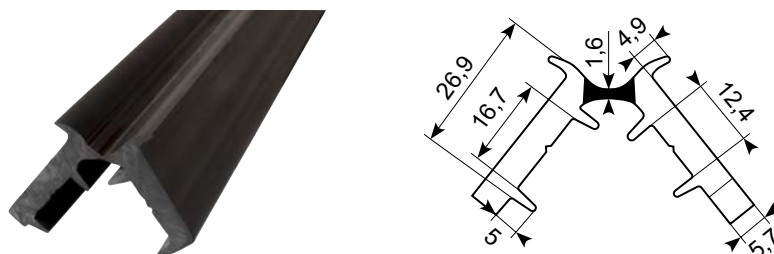Fleksibel hængsel Flexible hinge



Varenr. Item no.	A	B	C	D	L
20.6019J • *	26,5 mm	25 mm	16,7 mm	2,5 mm	1.678 mm
20.6020J	26,5 mm	25 mm	16,7 mm	2,5 mm	2.000 mm
20.6025J *	26,5 mm	25 mm	16,7 mm	2,5 mm	2.500 mm
20.6030J *	26,5 mm	25 mm	16,7 mm	2,5 mm	3.000 mm

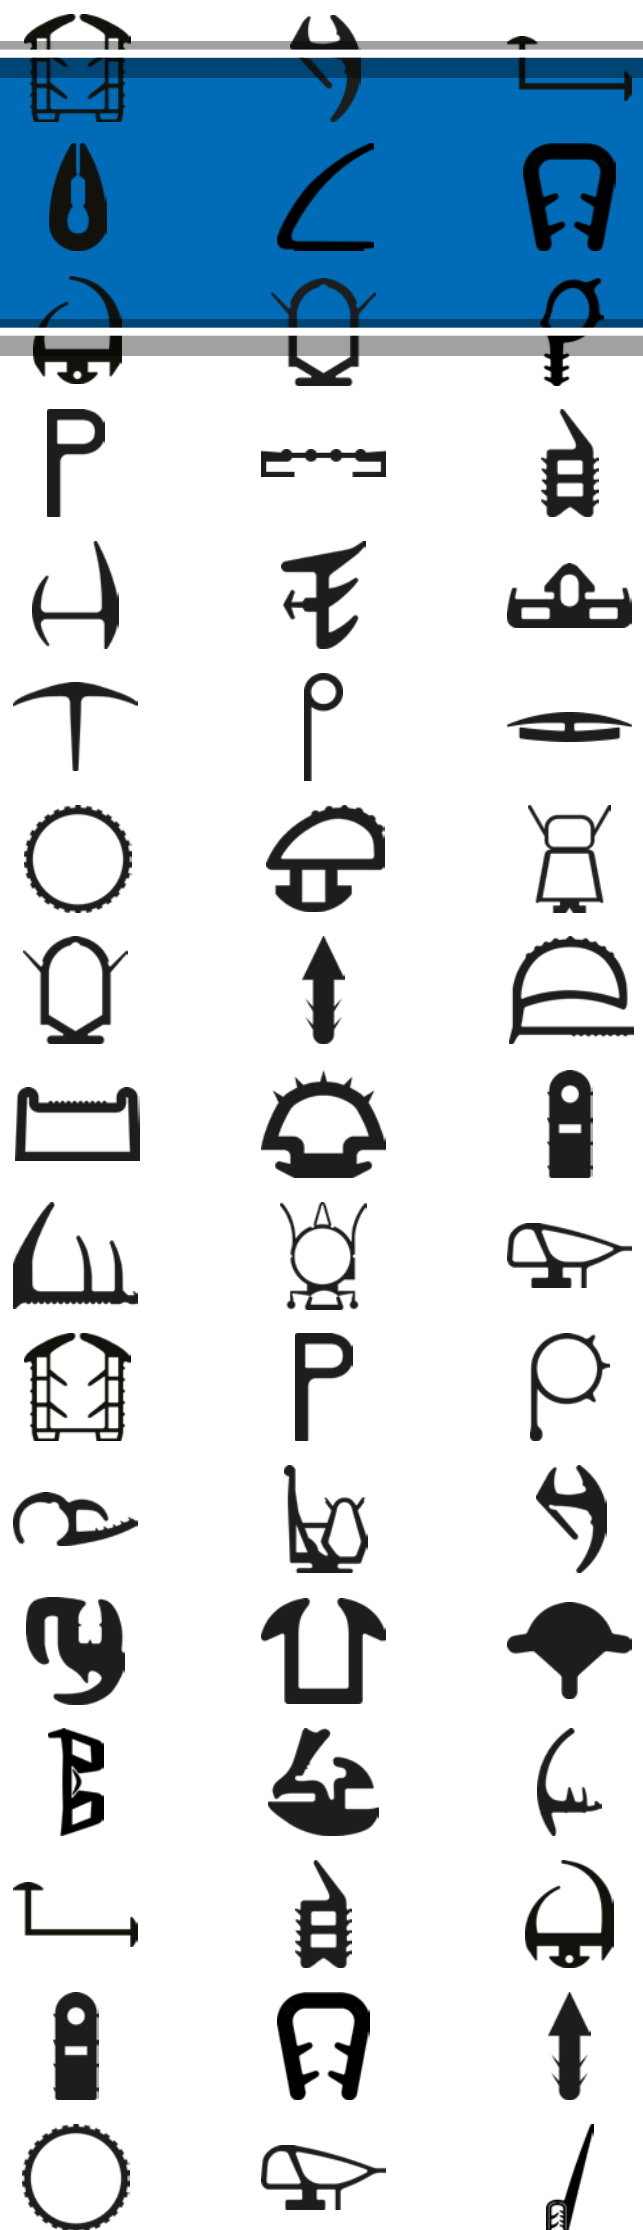
• Speciallængde med huller *Special length with holes*

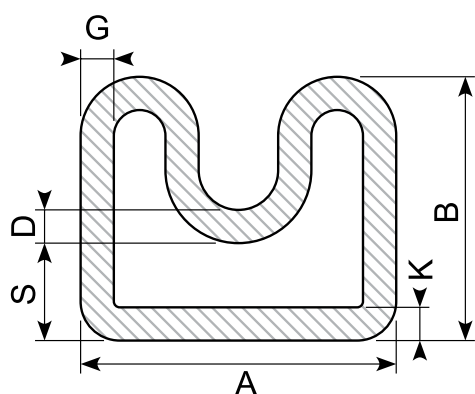
* Skaffevare *Special order item*




Inflatable seals

Inflatable seals are activated with compressed air. They have a unique ability to close completely tight and are therefore the ideal solution for numerous purposes. It is possible to get our inflatable seals with mounted valve.






Varenr. Item no.	A mm	B mm	D mm	G mm	K mm	S mm	Materiale Material	Hårdhed Hardness
30.0192-11800 *	10	10	1,5	2	2	5	Silicone	SH 60
30.0192-2819 *	16	14	1,8	1,8	1,8	4,9	Silicone	SH 65
30.0192-4756 *	16	17	1,5	1,5	1,5	10	Silicone	SH 60
30.0192-10963 *	17	14	2	2	2	5	Silicone	SH 60
30.0192-3375 *	18	15,5	2	2	2	2	Silicone	SH 60
30.0192-3161 *	18	15,5	2	2	2	6	Silicone	SH 60
30.0192-4588 *	18,5	17	2	2	2	9	Silicone	SH 60
30.0192-4733 *	18,7	18/16,6	2	2	2	7,9	Silicone	SH 60
30.0192-12642 *	21	15	2	2	2	8	Silicone	SH 60
30.0192-4947 *	22	16	3	3	3	6	Silicone	SH 60
30.0192-3877 *	24	20	2,5	2,5	2,5	5	Silicone	SH 60
30.0192-10680 *	25,3	20	2,7	2,7	2,7	7,3	Silicone	SH 60
30.0192-4633 *	26	20	3	3	3	8,2	Silicone	SH 60
30.0192-11007 *	26	20	3	3	3	8,5	Silicone	SH 60
30.0192-10927 *	26,5	20	3	3	3	9	Silicone	SH 60
30.0192-4926 *	27	20	4	4	4	10	Silicone	SH 60
30.0192-10322 *	30	15	3	3	3	3,7	Silicone	SH 60
30.0192-4634 *	35	32	5	5	5	17,6	Silicone	SH 60
30.0192-11484 *	35	34	3	3	3	17	Silicone	SH 60
30.0192-12418 *	45	34	3	3	5	9	Silicone	SH 60
30.0192-11016 *	46	34	3	3	5	9	Silicone	SH 60

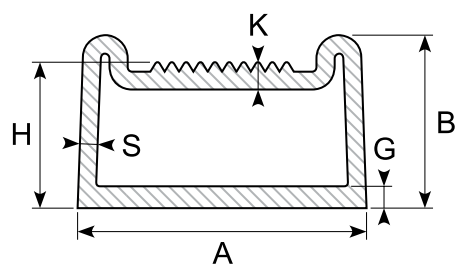

Varenr. Item no.	A mm	B mm	D mm	G mm	K mm	S mm	Materiale Material	Hårdhed Hardness
30.0192-3414 *	8,6	8,3	1,2	7,5	1,4	1,2	Silicone	SH 60
30.0192-4906 *	12	8	1,2	6,3	1,5	1,2	Silicone	SH 60
30.0192-3415 *	12	8,5	1,2	7,7	1,4	1,2	Silicone	SH 60
30.0192-4792 *	16	7,5	1,2	7	1,5	1	Silicone	SH 60
30.0192-3214 *	16	9,5	1,2	8	1,5	1	Silicone	SH 76
30.0192-2076 *	16	10	2	10	2,5	1	Silicone	SH 50
30.0192-11527 *	17	8,5	1,2	7	1,5	1	Silicone	SH 60
30.0192-3739 *	17	8,5	1,5	7	2	1	Silicone	SH 76
30.0192-2969 *	17	9,5	1,2	8	1,5	1	Silicone	SH 76
30.0192-10966 *	30	30,3	4	33,5	9,9	4	Silicone	SH 60



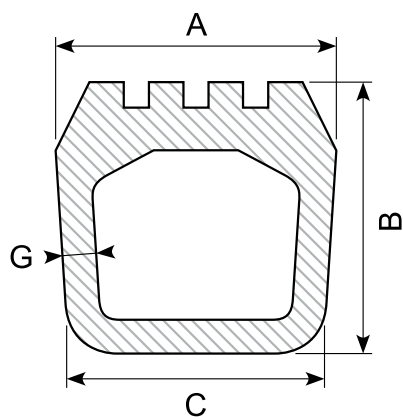
* Skaffevare Special order item



Varenr. Item no.	A mm	B mm	C mm	G mm	Hårdhed Hardness
30.0192-11093 *	13,6	10	13,6	2	SH 55
30.0192-12442 *	14	10	14	1,7	SH 50
30.0192-11137 *	14	14	14	3	SH 60
30.0192-4973 *	15,2	13,6	16,2	2	SH 55
30.0192-10389 *	16	12	16	2	SH 60
30.0192-10519 *	16	12	16	2	SH 60
30.0192-10142 *	16	12	16	2,5	SH 60
30.0192-11278 *	17	9	17	2	SH 55
30.0192-10358 *	21	24	21	3	SH 60
30.0192-11937 *	22	20	22	3	SH 60
30.0192-11342 *	32,5	32	35	5	SH 60
30.0192-11385 *	33,5	30	35	5	SH 60
30.0192-11991 *	33,7	32	33,7	5	SH 60
30.0192-4626 *	34	25	34	5	SH 60
30.0192-11550 *	34	35	35	5	SH 70
30.0192-10318 *	35	31	35	4,5	SH 65
30.0192-12300 *	35	31,5	35	5	SH 60
30.0192-3900 *	35	32	35	5	SH 60
30.0192-4690 *	35	32	35	4,5	SH 60
30.0192-10947 *	35	32	35	3,3	SH 55
30.0192-12465 *	35	33	35	4	SH 60
30.0192-12398 *	35	35	35	4,3	SH 60

Varenr. Item no.	A mm	B mm	C mm	G mm	Hårdhed Hardness
30.0192-3365 *	14	10	14	2	SH 60
30.0192-2845 *	14	11	13	2	SH 60
30.0192-1494 *	14	11	14	2/2,25	SH 60
30.0192-2029 *	14	14	15,5	2,5	SH 50
30.0192-3616 *	15,5	18	15,5	2	SH 60
30.0192-3588 *	16	14	16	2	SH 60
30.0192-1345 *	16	18	16	2,5	SH 50
30.0192-0374 *	16	20	15	2,5	SH 50
30.0192-2408 *	16,5	13	16,5	2,5	SH 55
30.0192-2067 *	16,5	16	15	2	SH 55
30.0192-0459 *	17	18	15	2,5	SH 50
30.0192-0460 *	17	18	17	3,5	SH 50
30.0192-1949 *	17,5	20	17,5	3	SH 45
30.0192-1768 *	27	19	27	3,5	SH 50
30.0192-3497 *	27,5	25	27,5	3	SH 60
30.0192-3551 *	33,5	32	35	5	SH 60
30.0192-0431 *	34	35	35	5	SH 60
30.0192-3845 *	35	32	35	4	SH 60
30.0192-2364 *	35	32	35	5	SH 60
30.0192-1744 *	35	33	35	5,5	SH 55
30.0192-1881 *	36	26,9	36	5	SH 55
30.0192-3693 *	53	41,5	53	5	SH 60

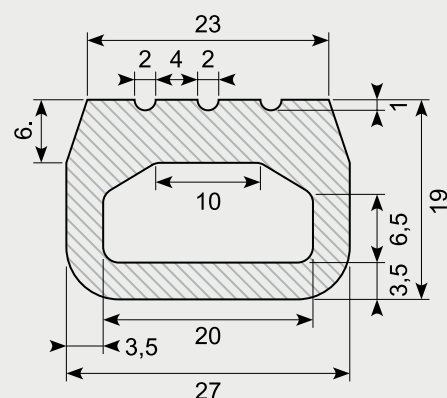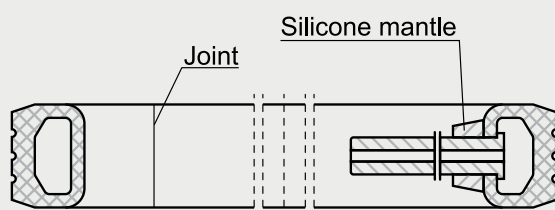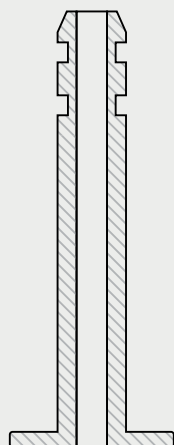
Ventil eksempel *Valve example*








Equipment

We have various products that facilitate the work with rubber products. Whether you need to glue, cut, shorten or fasten, you will find the tools you can use for this.

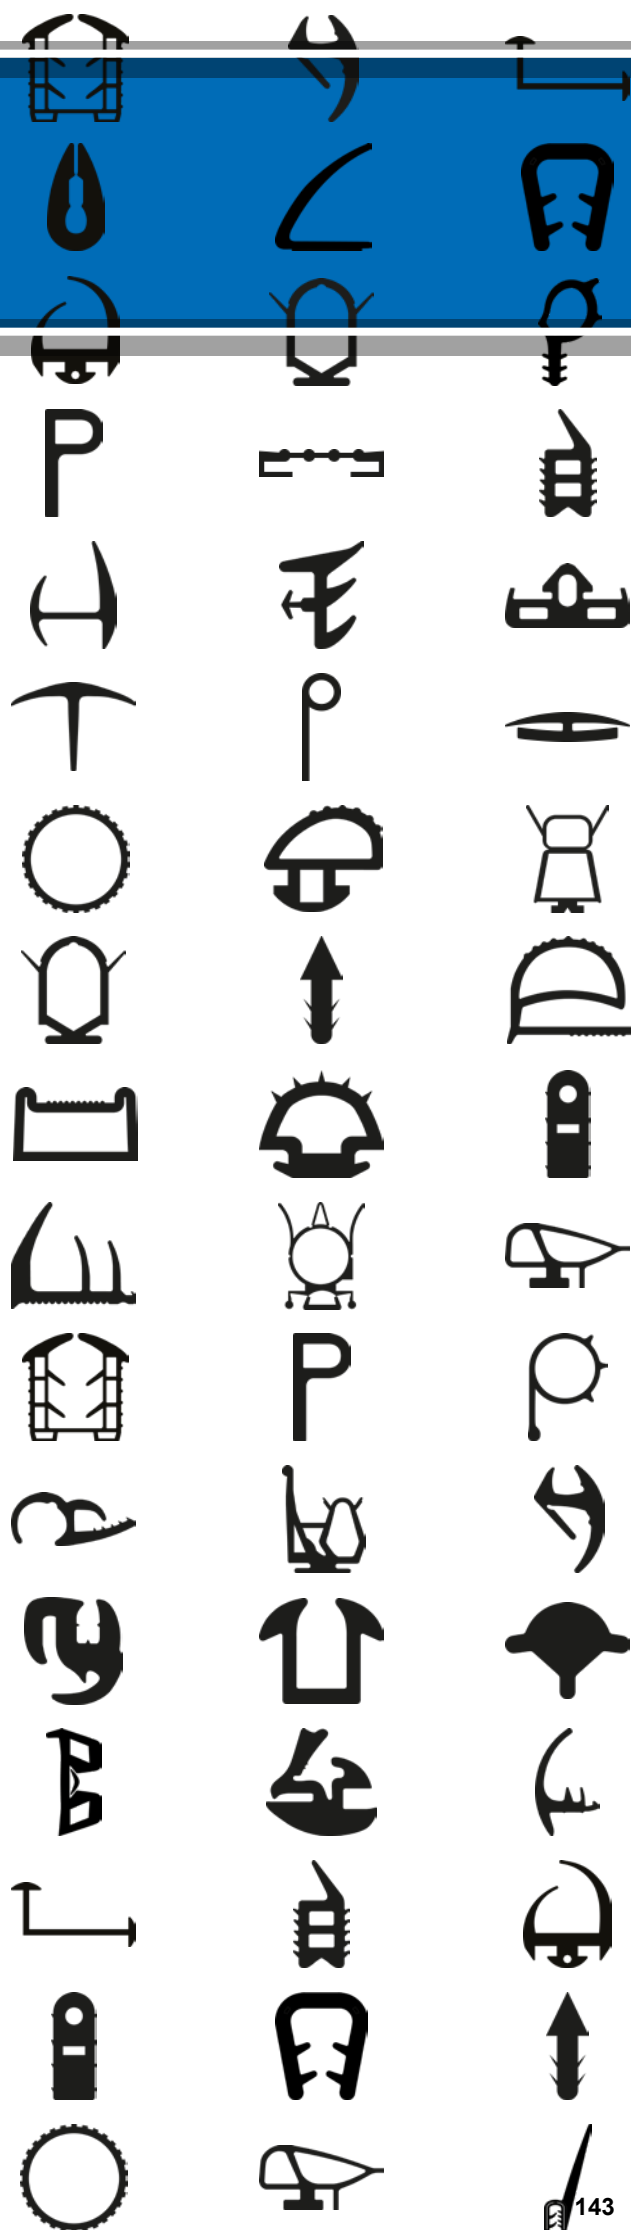If you do not find what you are looking for, you can always contact us.



84.930  Window tool set with tool for locking strip, Ø9.5 mm wire eye and mounting iron.	84.931  Tool for locking profiles, aluminum. Incl. Ø9,5 mm wire eye.	84.932T  Mounting bracket for glazing sections	83.842  Profile cutter in a 6-piece set
84.935  Loose wire eye for 84.931, Ø10,5 mm.	84.934A  Loose wire eye for 84.931, Ø6 mm.	84.934  Loose wire eye for 84.931, Ø9,5 mm.	S10.3301  Carpet knife with retractable blade. Integrated blade storage for 5 blades.
S10.3312  Knife with snap blade, 18 mm.	S10.3311  Metal knife with 9 mm snap blade. Stainless steel.	S10.3303  Blades for S10.3301. 5 blades per pack.	S10.3314  Blades for S10.3312. 10 blades per pack.
S10.3313  Blades for S10.3311. 10 blades per pack.	30.shoreA  Shore A hardness tester	30.shoreD  Shore D hardness tester	30.shore20-90  Shore samples, silicone rubber.

87.770/10  <i>Primer loctite SF 770 - improves adhesion on difficult to bond materials.</i>	87.1034  <i>Super glue Permalock, 3 g. Suitable for EPDM</i>	87.1035  <i>Sicomet super glue, 20 gr. Suitable for sponge rubber.</i>
87.2010  <i>A fast curing and gap-filling two-component Universal Glue</i>	87.723  <i>Spray glue. Loctite 3923.</i>	87.7051  <i>Terokal 2444, 340 g. CR adhesive for bonding sponge rubber, soundproofing materials, etc.</i>
87.52759 / 87.52759X  <i>Terostat 2759, 310 ml, grey. One-component sealant for sealing between rubber and metal.</i> 87.52759X: <i>Foil bag, 570 ml</i>	87.51989 / 87.51999F  <i>Terostat 930, 310 ml, black. Elastic and strong sealant for metal, glass and rubber.</i> 87.51999F: <i>Foil bag, 570 ml</i>	87.51939S *  <i>Teroson MS 939, 290 ml, black. For high-strength elastic bonding that absorbs vibrations.</i> Min order: 12 pcs.

Butylbånd

Item no.	Description
87.81152	Terostat 81 - 15 x 2 mm, 30 m
87.812015	Terostat 81 - 20 x 1,5 mm, 40 m
87.81252	Teroson RB 81 - 25 x 2 mm, 35 m
87.81302	Terostat 81 - 30 x 2,0 mm, 30 m
87.814015	Terostat 81 - 40 x 1,5 mm, 40 m



Properties rubber types NR, SBR, NBR, CR and EPDM

Navnefortegnelse i.h.t. ASTM D 1418 <i>Abbreviation as per ASTM D 1418</i>	NR	SBR	NBR	CR	EPDM
Kemisk betegnelse <i>Chemical nomenclature</i>	Natur-kautsjuk <i>Natural rubber</i>	Styrolbutadien kautsjuk <i>Styrol butadien rubber (Buna)</i>	Nitril kautsjuk (Perbunan) <i>Nitril rubber (Perbunan)</i>	Chlororen kautsjuk (Neopren) <i>Chloroprene rubber (Neoprene)</i>	Ethylen propylen kautsjuk (APTK) <i>Ethylene propylene dien rubber</i>
Hårdhedsområde (Shore A)(±5) <i>Hardness range (Shore A)(±5)</i>	40 - 90	45 - 90	45 - 90	40 - 90	40 - 90
Trækstyrke N/mm ² <i>Tensile strength N/mm²</i>	4 - 15	4 - 15	4 - 14	5 - 15	6 - 13
Tilbageståelselastisitet ved 20°C <i>Recoil elasticity at 20°C</i>	Udmærket <i>Excellent</i>	God <i>Good</i>	Tilfredsstillende <i>Satisfactory</i>	God <i>Good</i>	God <i>Good</i>
Slidstyrke <i>Abrasion resistance</i>	Meget god <i>Very good</i>	Meget god <i>Very good</i>	God <i>Good</i>	God <i>Good</i>	God <i>Good</i>
(1) Kemisk bestandighed <i>Chemical resistance</i>	God <i>Good</i>	God <i>Good</i>	Tilfredsstillende <i>Satisfactory</i>	God <i>Good</i>	Meget god <i>Very good</i>
(1) Oliebestandighed <i>Oil resistance</i>	Ringe <i>Low</i>	Ringe <i>Low</i>	Udmærket <i>Excellent</i>	God <i>Good</i>	Ringe <i>Low</i>
(1) Bestandighed overfor benzin <i>Petrol resistance</i>	Ingen <i>None</i>	Ringe <i>Low</i>	God <i>Good</i>	Ringe <i>Low</i>	Ringe <i>Low</i>
(1) Bestandighed overfor opløsningsmidler <i>Solvent resistance</i>	Ringe <i>Low</i>	Ringe <i>Low</i>	God <i>Good</i>	God <i>Good</i>	(3) Tilfredsstillende <i>Satisfactory</i>
(4) Temperaturbestandighed °C <i>Temperature resistance °C</i>	-40 / +80°C	-30 / +80°C	-30 / +100°C	-25 / +100°C	-40 / +100°C
Ozonbestandighed <i>Ozone resistance</i>	Tilfredsstillende <i>Satisfactory</i>	Tilfredsstillende <i>Satisfactory</i>	Tilfredsstillende <i>Satisfactory</i>	Meget god <i>Very good</i>	Udmærket <i>Excellent</i>
Vejrbestandighed <i>Weather resistance</i>	God <i>Good</i>	God <i>Good</i>	God <i>Good</i>	Meget god <i>Very good</i>	Udmærket <i>Excellent</i>
Gasuigennemtrængelighed <i>Gas impermeability</i>	Tilfredsstillende <i>Satisfactory</i>	Tilfredsstillende <i>Satisfactory</i>	God <i>Good</i>	God <i>Good</i>	Tilfredsstillende <i>Satisfactory</i>
(2) Modstand mod blivende deformation <i>Resistance to permanent deformation</i>	Meget god <i>Very good</i>	God <i>Good</i>	God <i>Good</i>	God <i>Good</i>	God <i>Good</i>
Bindekraft til metal <i>Adhesion to metal</i>	Udmærket <i>Excellent</i>	Meget god <i>Very good</i>	Tilfredsstillende <i>Satisfactory</i>	God <i>Good</i>	Tilfredsstillende <i>Satisfactory</i>
Bindekraft til tekstiler <i>Adhesion to textile</i>	Udmærket <i>Excellent</i>	God <i>Good</i>	Tilfredsstillende <i>Satisfactory</i>	Udmærket <i>Excellent</i>	Tilfredsstillende <i>Satisfactory</i>

Egenskaber plasttyper POM og PVC *Properties plastic types POM and PVC*

Navnefortegnelse <i>Abbreviation</i>	POM	PVC
Kemisk betegnelse <i>Chemical nomenclature</i>	Polyoxymethylene	Polyvinylchlorid
(1) Kemisk bestandighed <i>Chemical resistance</i>	God <i>Good</i>	God <i>Good</i>
(1) Oliebestandighed <i>Oil resistance</i>	Meget god <i>Very good</i>	God <i>Good</i>
(1) Bestandighed overfor benzin <i>Petrol resistance</i>	Meget god <i>Very good</i>	Ingen <i>None</i>
Ozonbestandighed <i>Ozone resistance</i>	Ingen <i>None</i>	Meget god <i>Very good</i>
Svovlsyre bestandighed <i>Sulfuric acid resistance</i>	Ingen <i>None</i>	Ingen <i>None</i>
(4) Temperaturbestandighed °C <i>Temperature resistance °C</i>	Ca. -40 / +100°C	Ca. -10 / +60°C
Egenskaber <i>Properties</i>	Gode mekaniske egenskaber, slidbestandig, dimensionsstabil <i>Good mechanical properties, abrasion resistant, dimensionally stable</i>	God mekanisk vurdering, god svejse/vedhæft egenskaber, bliver hårdere i benzin og olie <i>Good mechanical rating, good welding/adhesion properties, hardens in petrol and oil</i>

Egenskaber plasttype TPE *Properties plastic type TPE*

Type og kvalitet <i>Type and quality</i>	TPE (gennemsigtig) <i>TPE (transparent)</i>	TPE (normal)
Kemisk betegnelse <i>Chemical nomenclature</i>	Termoplastiske elastomerer	
Hårdhed <i>Hardness</i>	55 Sh A - 50 Sh D	60 Sh A - 50 Sh D
Temperaturbestandighed °C <i>Temperature resistance °C</i>	-50 til +125°C	-50 til +125°C
Egenskaber <i>Properties</i>	Fremragende vejrbestandighed. God kemisk bestandighed (undtagen ved organisk opløsningsmiddel, aromatiske- og vegetabiliske olier). <i>Excellent weather resistance. Good chemical resistance (except for organic solvent, aromatic and vegetable oils).</i>	

- (1) På grund af mange mulige kemikalier, opløsningsmidler, arbejdstemperaturer og arbejdstider kan de oplyste værdier i enkelte tilfælde udvise forandringer. Især kan en elastomeretype, som normalt udviser ringe bestandighed, udvise en meget god resistens overfor bestemte medier.
In view of the multitude of chemicals, solvents, application temperatures and times, the value quoted may vary in some cases. For example one type of elastomer, which normally has only low resistance properties, could show very good resistance to certain media.
- (2) Ved relativt lave hhv. høje temperaturer reduceres modstanden normalt. *At relatively high or low temperatures, resistance generally drops.*
- (3) God udvidelsesbestandighed overfor forskellige blødgørere. *Good expansion resistance to various ester based plasticizers.*
- (4) Det drejer sig om grænseværdier, som kan svinge alt efter sammensætningen af blandingen. Vedvarende indsætning i grænseområderne ændrer de fysiske værdier. Til ekstreme påvirkninger kræves særlige elastomere-blandinger.
These are borderline values which, depending on composition of the mixture, can vary. If used permanently in such borderline areas, this can lead to a change in the physical values. For such extreme applications it is advisable to use special elastomer mixtures.

Properties silicone

Egenskaber Properties	
Arbejdstemperatur (standarddele) <i>Working temperature (standard compounds)</i>	-50°C to +180°C / +250°C
Arbejdstemperatur (specialdele) <i>Working temperature (specific compounds)</i>	-90°C / +315°C
Forlængelse <i>Elongation</i>	300 - 800%
Hårdhed <i>Hardness</i>	25 - 80 SHA
Sammenbrudsspænding <i>Breakdown voltage</i>	23 kV (VDE 0303)
Materialer til specifikke applikationer <i>Materials for specific applications</i>	Høj kemikalie resistens. God dæmpning af høj- og lavfrekvent vibrationer. Silikonegummiprodukter er smagløse og lugtfrie. Modstandsdygtig over for aldring og vejrforhold <i>High chemical resistance. Good damping of high and low frequency vibrations. Silicone rubber products are tasteless and odourless. Resistance to ageing and weather conditions.</i>
Farver <i>Colors</i>	Farven på silikoneprodukter kan vælges til en given applikation: Fra gennemsigtig til sort i overensstemmelse med RAL, inklusiv metalfarver (aluminium, stål, messing). Farverne er kendetegnet ved livlighed og holdbarhed. <i>The colour of silicon products can be suitably chosen for the particular application: from transparent to black, in accordance to RAL, including metallic colours (aluminium, steel, brass). The colours feature of vividness and durability</i>

Tolerancer for ekstruderede profiler *Tolerances for extruded profiles*

Dimensionstolerancer for støbte, ekstruderede og kalandrede massive gummiprodukter. (GB/T 3672-92) ISO3302-1998. <i>Dimensional tolerances for moulded, extruded and calendered solid rubber products. (GB/T 3672-92) ISO3302-1998.</i>			
Gummitykkelse <i>Rubber thickness</i>	E1 ±	E2 ± Solid	E3 ± Svampegummi <i>Spongerubber</i>
0 - 1,5 mm	0,15 mm	0,25 mm	0,4 mm
1,5 - 2,5 mm	0,2 mm	0,35 mm	0,5 mm
2,5 - 4 mm	0,25 mm	0,4 mm	0,65 mm
4 - 6,3 mm	0,35 mm	0,5 mm	0,8 mm
6,3 - 10 mm	0,4 mm	0,65 mm	1 mm
10 - 16 mm	0,5 mm	0,8 mm	1,3 mm
16 - 25 mm	0,65 mm	1 mm	1,6 mm
25 - 40 mm	0,8 mm	1,3 mm	2 mm
40 - 63 mm	1 mm	1,6 mm	2,5 mm
63 - 100 mm	1,3 mm	2 mm	3,2 mm

Længdetolerancer for afkortede profiler *Length tolerances for shortened profiles*

Længdetolerancer for massive gummiprofiler DIN 7715-L2 <i>Solid rubber profile length tolerances DIN 7715-L2</i>				
Nominelt område <i>Nominal range</i>				± mm
Fra <i>From</i>	0 mm	Til <i>To</i>	40 mm	1,0
Over	40 mm	Til <i>To</i>	63 mm	1,3
Over	63 mm	Til <i>To</i>	100 mm	1,6
Over	100 mm	Til <i>To</i>	160 mm	2,0
Over	160 mm	Til <i>To</i>	250 mm	2,5
Over	250 mm	Til <i>To</i>	400 mm	3,2
Over	400 mm	Til <i>To</i>	360 mm	4,0
Over	630 mm	Til <i>To</i>	1.000 mm	5,0
Over	1.000 mm	Til <i>To</i>	1.600 mm	6,3
Over	1.600 mm	Til <i>To</i>	2.500 mm	10,0
Over	2.500 mm	Til <i>To</i>	4.000 mm	12,5
Over	4.000 mm	Til <i>To</i>		0,32%

Varenummerindeks *Item number index*

20.6019J.....	139	30.0192-3616.....	142	30.108NBR.....	27	30.13186-4.....	90	30.2455.....	50
20.6020.....	139	30.0192-3693.....	142	30.108SIH.....	27	30.13186-5.....	90	30.2505E.....	29
20.6020J.....	139	30.0192-3739.....	141	30.108SIHX.....	27	30.13186-6.....	90	30.2525E.....	29
20.6025.....	139	30.0192-3845.....	142	30.109.5CR.....	27	30.13186-7.....	90	30.2566.....	31
20.6025J.....	139	30.0192-3877.....	141	30.109.5NBR.....	27	30.13186-8.....	90	30.257S.....	32
20.6030.....	139	30.0192-3900.....	142	30.109CR.....	27	30.13242.....	36	30.262S.....	29
20.6030J.....	139	30.0192-4588.....	141	30.109E.....	27	30.13242.....	36	30.2653.....	32
20.6120.....	139	30.0192-4626.....	142	30.109NBR.....	27	30.132CR.....	27	30.2984-1.....	51
20.6125.....	139	30.0192-4633.....	141	30.110CR.....	27	30.132NBR.....	27	30.2984-2.....	51
20.6130.....	139	30.0192-4634.....	141	30.110E.....	27	30.13315.....	70	30.2984-3.....	51
30.0192-0374.....	142	30.0192-4690.....	142	30.110NBR.....	27	30.13421.....	33	30.2984-5.....	51
30.0192-0431.....	142	30.0192-4733.....	141	30.111CR.....	27	30.13447-8.....	34	30.2984-6.....	51
30.0192-0459.....	142	30.0192-4756.....	141	30.111NBR.....	27	30.13503.....	36	30.3003E.....	29
30.0192-0460.....	142	30.0192-4792.....	141	30.112CR.....	27	30.13535.....	50	30.3006E.....	29
30.0192-10142.....	142	30.0192-4906.....	141	30.112E.....	27	30.135E.....	27	30.313.....	32
30.0192-10318.....	142	30.0192-4926.....	141	30.112NBR.....	27	30.135NBR.....	27	30.314S.....	32
30.0192-10322.....	141	30.0192-4947.....	141	30.11393.....	48	30.136.....	54	30.315S.....	32
30.0192-10358.....	142	30.0192-4973.....	142	30.113CR.....	27	30.136/45.....	54	30.315SB.....	33
30.0192-10389.....	142	30.10003K.....	29	30.113E.....	27	30.136NBR.....	54	30.324S.....	31
30.0192-10519.....	142	30.10005E.....	29	30.113NBR.....	27	30.13708.....	54	30.324SB.....	31
30.0192-10680.....	141	30.10036.....	36	30.11459.....	49	30.13841.....	33	30.325X.....	31
30.0192-10927.....	141	30.101.....	27	30.114CR.....	27	30.1386.....	50	30.3305E.....	29
30.0192-10947.....	142	30.101.25.....	27	30.114E.....	27	30.138NBR.....	54	30.331.....	30
30.0192-10963.....	141	30.101.5.....	27	30.114NBR.....	27	30.138S.....	54	30.3310E.....	29
30.0192-10966.....	141	30.102.....	27	30.115CR.....	27	30.140.....	54	30.333X.....	30
30.0192-11007.....	141	30.102E.....	27	30.115E.....	27	30.14053.....	33	30.340.....	34
30.0192-11016.....	141	30.102NBR.....	27	30.116CR.....	27	30.14098-2.....	31	30.4003E.....	29
30.0192-11093.....	142	30.103.5CR.....	27	30.116E.....	27	30.140CR.....	27	30.4437.....	35
30.0192-11137.....	142	30.103.5NBR.....	27	30.116NBR.....	27	30.140NBR.....	27	30.4469.....	35
30.0192-11278.....	142	30.103CR.....	27	30.11774.....	50	30.141.....	34	30.5003E.....	29
30.0192-11342.....	142	30.103E.....	27	30.117E.....	27	30.14130.....	33	30.5003K.....	29
30.0192-11385.....	142	30.103EX.....	27	30.118CR.....	27	30.14163.....	34	30.5004E.....	29
30.0192-11484.....	141	30.103NBR.....	27	30.118E.....	27	30.14163-1.....	34	30.5005E.....	29
30.0192-11527.....	141	30.103SIH.....	27	30.118NBR.....	27	30.14226.....	30	30.5010E.....	29
30.0192-11550.....	142	30.104.5CR.....	27	30.11911.....	51	30.14227.....	51	30.50967.....	33
30.0192-11800.....	141	30.104.5E.....	27	30.119E.....	27	30.1428.....	33	30.5179.....	34
30.0192-11937.....	142	30.104.5NBR.....	27	30.1201KE.....	29	30.142S.....	34	30.5550M.....	32
30.0192-11991.....	142	30.10461-2.....	36	30.120CR.....	27	30.14356.....	51	30.5808E.....	29
30.0192-12300.....	142	30.10485.....	35	30.120E.....	27	30.144.....	34	30.5881.....	31
30.0192-12398.....	142	30.104CR.....	27	30.120NBR.....	27	30.145.....	34	30.5981.....	32
30.0192-12418.....	141	30.104E.....	27	30.121E.....	27	30.14507-1.....	49	30.6487.....	55
30.0192-12442.....	142	30.104NBR.....	27	30.122CR.....	27	30.14507-2.....	49	30.6502.5E.....	29
30.0192-12465.....	142	30.104SIH.....	27	30.122E.....	27	30.14507-3.....	51	30.6622.....	49
30.0192-12642.....	141	30.105.3CR.....	27	30.122NBR.....	27	30.14803.....	109	30.6622N.....	49
30.0192-1345.....	142	30.105.3NBR.....	27	30.124E.....	27	30.148S.....	54	30.6648.....	31
30.0192-1494.....	142	30.105.7CR.....	27	30.125CR.....	27	30.15005E.....	29	30.6648G.....	31
30.0192-1744.....	142	30.105.7NBR.....	27	30.125E.....	27	30.15005KE.....	29	30.6648S.....	31
30.0192-1768.....	142	30.105CR.....	27	30.125NBR.....	27	30.150CR.....	27	30.6648S.....	31
30.0192-1881.....	142	30.105E.....	27	30.12759.....	29	30.15170.....	33	30.6705E.....	29
30.0192-1949.....	142	30.105NBR.....	27	30.12896.....	50	30.16239.....	36	30.6710E.....	29
30.0192-2029.....	142	30.105SIH.....	27	30.12932-1.....	50	30.16688.....	35	30.6724.....	49
30.0192-2067.....	142	30.106.5CR.....	27	30.12932-2.....	35	30.176.....	55	30.6944.....	32
30.0192-2076.....	141	30.106.5NBR.....	27	30.12957-1.....	30	30.180.....	55	30.7106.....	32
30.0192-2364.....	142	30.106CR.....	27	30.12957-2.....	30	30.182.....	54	30.7266.....	35
30.0192-2408.....	142	30.106E.....	27	30.12957-3.....	31	30.190.....	33	30.7300.....	32
30.0192-2819.....	141	30.106NBR.....	27	30.13049-1.....	35	30.2005E.....	29	30.7300/4.....	32
30.0192-2845.....	142	30.106SIH.....	27	30.13049-2.....	35	30.211.04.385.....	52	30.7300/4Y.....	32
30.0192-2969.....	141	30.107.5CR.....	27	30.13049-4.....	35	30.21101205.....	51	30.7367.....	29
30.0192-3161.....	141	30.107.5NBR.....	27	30.13049-5.....	35	30.21202300.....	35	30.7408X.....	54
30.0192-3214.....	141	30.10777-1.....	50	30.13066.....	109	30.2151.....	31	30.7411.....	35
30.0192-3365.....	142	30.107CR.....	27	30.13086.....	49	30.2151S.....	31	30.7505E.....	29
30.0192-3375.....	141	30.107E.....	27	30.130CR.....	27	30.216S.....	29	30.7508.....	50
30.0192-3414.....	141	30.107NBR.....	27	30.130NBR.....	27	30.218S.....	30	30.7509.....	50
30.0192-3415.....	141	30.108.4CR.....	27	30.13144XX.....	70	30.220L.....	30	30.7519.....	51
30.0192-3497.....	142	30.108.4NBR.....	27	30.13186-1.....	90	30.22381.....	54	30.7519NBR.....	51
30.0192-3551.....	142	30.108CR.....	27	30.13186-2.....	90	30.2310E.....	29	30.7559.....	33
30.0192-3588.....	142	30.108E.....	27	30.13186-3.....	90	30.2438.....	34	30.762.....	35

30.7645.....	33	31.025S.....	48	32.514S.....	58	33.310X.....	5	33.401G.....	5
30.7648.....	32	31.035S.....	52	32.516S.....	58	33.311.....	19	33.403F.....	11
30.7649.....	31	31.036SI.....	52	32.523S.....	58	33.312.....	19	33.407A.....	11
30.7649-12.....	31	31.036SI-LTC.....	52	32.527.....	58	33.319.....	12	33.408A.....	11
30.7649-8.....	31	31.037.....	52	32.7125.....	59	33.319F.....	12	33.408B.....	11
30.7650.....	31	31.037SI.....	51	32.7195S.....	59	33.321.....	13	33.408X.....	11
30.7651.....	32	31.038SI.....	52	32.754S.....	58	33.323.....	12	33.409.....	5
30.7652.....	30	31.041S.....	48	32.795S.....	59	33.324CR.....	12	33.409ALU.....	17
30.7663.....	34	31.042S.....	48	32.8517.....	34	33.326.....	14	33.409F.....	5
30.7696.....	29	31.043S.....	49	32.8518.....	33	33.331.....	14	33.409POM.....	24
30.7780/4.....	32	31.047.....	48	32.8520.....	34	33.332B.....	14	33.409POMX.....	24
30.7932.....	30	31.048.....	51	32.866.....	59	33.332X.....	13	33.410POMX.....	24
30.7933.....	30	31.050.....	51	32.924.....	57	33.335.....	13	33.410X.....	5
30.7935.....	30	31.060S.....	48	32.924K.....	57	33.338F.....	12	33.410XG.....	5
30.798.....	34	31.061S.....	49	32.924K.....	61	33.339X.....	13	33.411.....	6
30.7987.....	50	31.063.....	48	33.000.....	17	33.340.....	14	33.414.....	6
30.8199.....	32	31.064.....	49	33.019.....	14	33.351.....	9	33.415.....	6
30.8199W.....	32	31.065S.....	49	33.020.....	13	33.351A.....	9	33.416.....	109
30.8331.....	34	31.066.....	49	33.020NBR.....	13	33.352.....	9	33.417TPE.....	25
30.8439.....	57	31.068S.....	49	33.021.....	8	33.353.....	9	33.417TPEX.....	25
30.8469.....	30	31.070S.....	50	33.022.....	14	33.353NBR.....	9	33.418SS.....	5
30.8538.....	55	31.071S.....	50	33.024.....	13	33.353X.....	9	33.418X.....	6
30.8538B.....	55	31.074S.....	50	33.025.....	10	33.354.....	8	33.419.....	6
30.9215.....	36	31.112S.....	59	33.026.....	16	33.354A.....	8	33.419A.....	6
30.9387-1.....	36	31.116S.....	59	33.026X.....	17	33.354B.....	8	33.420FX.....	6
30.9387-2.....	35	31.145S.....	59	33.026XA.....	16	33.355B.....	11	33.420H.....	6
30.9437-125.....	36	31.148.....	59	33.094X.....	6	33.357X.....	9	33.420X.....	5
30.9437-160.....	37	31.155.....	59	33.1153A.....	6	33.358A.....	8	33.422.....	5
30.9437-200.....	37	31.216GS.....	49	33.1153GA.....	6	33.358B.....	8	33.424.....	25
30.9437-250.....	37	31.216ST.....	49	33.1154.....	7	33.358D.....	8	33.424TPE.....	25
30.9437-315.....	37	31.365.....	59	33.1155.....	7	33.358E.....	8	33.424TPEX.....	25
30.9437-400.....	37	31.369.....	34	33.1156.....	7	33.358X.....	8	33.426.....	7
30.9519.....	50	31.4281.....	83	33.1157.....	7	33.359X.....	9	33.426A.....	6
30.9548.....	48	31.6701.....	59	33.1158A.....	7	33.360.....	10	33.426GA.....	6
30.9691-3.....	31	31.6702.....	59	33.1159.....	7	33.360F.....	10	33.426X.....	7
30.9691-5500.....	29	31.6703.....	59	33.1160.....	7	33.360NBR.....	10	33.426XA.....	6
30.9826-1.....	36	31.702.....	35	33.1161.....	7	33.360R.....	10	33.427X.....	6
30.9826-2.....	36	31.OT2179.....	55	33.1162.....	7	33.360X.....	10	33.428.....	7
30.9884S.....	70	32.009S.....	61	33.1163.....	7	33.362.....	10	33.428G.....	7
30.9884X.....	52	32.016S.....	57	33.12116.....	14	33.362C.....	10	33.429.....	19
30.9885.....	52	32.034S.....	57	33.200POM.....	24	33.362D.....	10	33.430.....	7
30.9996-10.....	30	32.036S.....	57	33.200POMX.....	24	33.362E.....	10	33.430A.....	7
30.9996-4.....	36	32.036X.....	57	33.201POM.....	24	33.362F.....	10	33.431A.....	20
30.9996-5.....	36	32.044S.....	57	33.203POM.....	24	33.362FX.....	9	33.432.....	5
30.E368.....	70	32.046S.....	57	33.203POMX.....	24	33.362X.....	10	33.432ALU.....	17
30.OT0136.....	50	32.047.....	57	33.210POM.....	24	33.365X.....	10	33.433.....	7
30.OT101.....	54	32.057.....	58	33.210POMX.....	24	33.367.....	10	33.434.....	6
30.OT1024.....	29	32.064S.....	58	33.211POM.....	24	33.367X.....	11	33.435X.....	6
30.OT1024B.....	29	32.066.....	58	33.212POM.....	24	33.369.....	9	33.436.....	17
30.OT1057.....	54	32.075.....	58	33.213POMX2.....	24	33.370NBR.....	9	33.438.....	5
30.OT10644.....	33	32.095S.....	58	33.214POM.....	24	33.371E.....	8	33.439A.....	16
30.OT1080.....	55	32.1024S.....	57	33.215POM.....	24	33.371FX.....	8	33.442.....	17
30.OT1081.....	55	32.1025S.....	57	33.216POM.....	25	33.371X.....	9	33.443X.....	16
30.OT1387.....	33	32.1025SK.....	57	33.217POM.....	25	33.372X.....	12	33.444A.....	12
30.OT2036.....	54	32.1037S.....	58	33.218POM.....	25	33.374.....	10	33.444X.....	12
30.OT3271.....	55	32.1045S.....	58	33.220POM.....	24	33.375.....	11	33.449.....	13
30.OT3272.....	33	32.1045SK.....	57	33.221POM.....	24	33.376.....	9	33.450NBR.....	12
30.OT3334.....	55	32.1301.....	61	33.306.....	5	33.377.....	10	33.451E.....	13
30.OT3354.....	33	32.1307S.....	59	33.307.....	5	33.378.....	11	33.452R.....	13
30.OT3394.....	48	32.1640.....	58	33.307A.....	5	33.379.....	11	33.452X.....	14
30.OT3440.....	50	32.165.....	58	33.308.....	5	33.380.....	11	33.453X.....	14
30.shore20-90.....	144	32.2024CR.....	57	33.308A.....	5	33.381.....	12	33.454X.....	13
30.shoreA.....	144	32.2024M.....	57	33.308POM.....	24	33.382.....	15	33.455.....	14
30.shoreD.....	144	32.2045M.....	57	33.308POMG.....	24	33.383.....	16	33.456F.....	14
30.SM251.....	55	32.255S.....	58	33.308POMXG.....	24	33.395F.....	12	33.457.....	12
30.WI660.....	29	32.300X.....	61	33.309XM.....	5	33.395X.....	11	33.457S-4.....	13
31.018S.....	48	32.301X.....	61	33.310ALU.....	17	33.395XA.....	11	33.457S-5.....	13
31.018X.....	48	32.309X.....	61	33.310SS.....	5	33.396.....	12	33.457S-6.....	13
31.021S.....	48	32.409X.....	61	33.310SS-316.....	5	33.398.....	11	33.457ST.....	13
31.022S.....	48	32.512.....	58	33.310SS-316EPDM.....	5	33.398X.....	12	33.458A.....	14

33.458X.....	14	33.536.....	19	34.62713S.....	79	35.2010KL.....	65	35.6010.....	64
33.459A.....	15	33.537.....	19	34.636.....	78	35.2012.....	64	35.6040.....	64
33.459B.....	15	33.538.....	19	34.637.....	78	35.2012K.....	65	35.8020K.....	65
33.459P.....	15	33.539.....	19	34.641.....	77	35.2015.....	64	36.0505.....	66
33.459XA.....	15	33.540.....	19	34.643.....	77	35.2015K.....	65	36.0806.....	66
33.459XB.....	15	33.541.....	19	34.644.....	77	35.2018.....	64	36.1005.....	66
33.460-2C.....	16	33.542.....	21	34.677.....	79	35.2020.....	64	36.1005G.....	66
33.460-2F.....	15	33.543.....	21	34.678.....	79	35.2020K.....	65	36.1005X.....	66
33.460-2X.....	16	33.544.....	21	34.7102-50.....	77	35.2207K.....	65	36.1006SIH.....	67
33.460-4C.....	16	33.545.....	21	34.7196.....	77	35.2502.....	64	36.1007.....	66
33.460-4X.....	16	33.546.....	21	34.7199.....	77	35.2505.....	64	36.1007X.....	66
33.460-6A.....	16	33.547.....	21	34.7514.....	78	35.2505K.....	65	36.1008.....	66
33.460-6C.....	16	33.548.....	21	34.7528-2.....	35	35.2506.....	64	36.1010.....	66
33.460-6K.....	16	33.550.....	20	35.0806.....	64	35.2508K.....	65	36.1010CR.....	66
33.460-6XL.....	16	33.551.....	21	35.0806K.....	65	35.2510.....	64	36.1010E.....	65
33.460-6XLPOM.....	24	33.552.....	20	35.0808K.....	65	35.2510K.....	65	36.1010SIH.....	67
33.462.....	17	33.553.....	20	35.10020K.....	65	35.2515.....	64	36.1010X.....	66
33.462R.....	17	33.554.....	20	35.1003.....	64	35.2515K.....	65	36.1025E.....	63
33.463.....	11	33.555.....	20	35.1003K.....	65	35.2520.....	64	36.102E.....	63
33.464.....	14	33.556.....	20	35.1004.....	64	35.2520K.....	65	36.1035E.....	63
33.465A.....	15	33.611.....	108	35.1004K.....	65	35.2525.....	64	36.103CR.....	63
33.465B.....	15	33.615.....	108	35.1005.....	64	35.2525K.....	65	36.103E.....	63
33.465C.....	15	33.624.....	109	35.1005K.....	65	35.2806K.....	65	36.1045E.....	63
33.465X.....	15	33.625.....	109	35.1007.....	64	35.3003K.....	65	36.104CR.....	63
33.466.....	14	33.670.....	108	35.1007K.....	65	35.3005.....	64	36.105CR.....	63
33.468B.....	8	33.671.....	108	35.1008.....	64	35.3005K.....	65	36.105E.....	63
33.468F.....	8	33.672.....	108	35.1008K.....	65	35.3006K.....	65	36.106CR.....	63
33.468FX.....	8	33.673.....	108	35.1010.....	64	35.3007.....	64	36.106E.....	63
33.468X.....	8	33.674.....	109	35.1010K.....	65	35.3007K.....	65	36.106EG.....	63
33.469X.....	8	33.675.....	109	35.1203.....	64	35.3010.....	64	36.106ESP.....	63
33.470.....	13	33.676.....	109	35.1203K.....	65	35.3010K.....	65	36.107CR.....	63
33.471.....	16	33.848.....	22	35.1204K.....	65	35.3012.....	64	36.107E.....	63
33.472.....	16	33.9779.....	11	35.1204KL.....	65	35.3012K.....	65	36.108CR.....	63
33.473.....	17	34.018X.....	48	35.1206K.....	65	35.3015.....	64	36.108E.....	63
33.474.....	16	34.031X.....	48	35.1208K.....	65	35.3015K.....	65	36.108EG.....	63
33.475.....	15	34.035.....	49	35.1209.....	64	35.3020.....	64	36.109E.....	63
33.478.....	14	34.117/6.....	51	35.1209K.....	65	35.3020K.....	65	36.110CR.....	63
33.479.....	15	34.14334X.....	48	35.1212.....	64	35.3025.....	64	36.110E.....	63
33.480.....	12	34.3011.....	78	35.1212K.....	65	35.3025K.....	65	36.111E.....	63
33.481.....	9	34.3020.....	78	35.1503.....	64	35.3030.....	64	36.112CR.....	63
33.481A.....	9	34.3032.....	77	35.1503K.....	65	35.3030K.....	65	36.112E.....	63
33.481B.....	9	34.601.....	77	35.1504K.....	65	35.3505.....	64	36.112EG.....	63
33.482.....	15	34.601G.....	77	35.1505K.....	65	35.3505K.....	65	36.115CR.....	63
33.483.....	15	34.602.....	77	35.1506K.....	65	35.3510.....	64	36.117E.....	63
33.506.....	12	34.602G.....	77	35.1507.....	64	35.3510K.....	65	36.118CR.....	63
33.510.....	19	34.603.....	77	35.1507K.....	65	35.3535.....	64	36.118E.....	63
33.511.....	20	34.603G.....	77	35.1510.....	64	35.3535K.....	65	36.119CR.....	63
33.512.....	20	34.604.....	77	35.1510K.....	65	35.4003K.....	65	36.1204SIHKF.....	67
33.513.....	20	34.606.....	79	35.1512.....	64	35.4005.....	64	36.1205.....	66
33.514.....	20	34.606X.....	79	35.1512K.....	65	35.4005K.....	65	36.1206.....	66
33.515.....	20	34.607.....	79	35.1515.....	64	35.4010.....	64	36.120CR.....	63
33.516.....	21	34.607X.....	79	35.1515K.....	65	35.4010K.....	65	36.120E.....	63
33.517.....	21	34.608X.....	79	35.1605.....	64	35.4012K.....	65	36.1210.....	66
33.518.....	21	34.609X.....	79	35.1605K.....	65	35.4020.....	64	36.1210E.....	65
33.519.....	21	34.613.....	77	35.1608.....	64	35.4020K.....	65	36.1210X.....	66
33.520.....	21	34.614.....	77	35.1608K.....	65	35.4030.....	64	36.1212SIH.....	67
33.521.....	21	34.620010.....	77	35.1708K.....	65	35.4030K.....	65	36.1212X.....	66
33.523.....	21	34.620040.....	77	35.1803K.....	65	35.4035.....	64	36.122CR.....	63
33.524.....	21	34.620140.....	78	35.18053K.....	65	35.4035K.....	65	36.122E.....	63
33.525.....	22	34.620210.....	77	35.1809K.....	65	35.4040.....	64	36.12511X.....	66
33.526.....	20	34.62039.....	78	35.1904K.....	65	35.4040K.....	65	36.125E.....	63
33.527.....	19	34.62040.....	78	35.2003.....	64	35.4505.....	64	36.130EX.....	63
33.528.....	20	34.62041.....	78	35.2003K.....	65	35.4505K.....	65	36.135E.....	63
33.529.....	19	34.620420.....	78	35.2005.....	64	35.5005.....	64	36.14044.....	70
33.530.....	19	34.62110.....	78	35.20055.....	64	35.5006.....	64	36.1406X.....	66
33.531.....	19	34.624.....	78	35.20055K.....	65	35.5006K.....	65	36.1503.....	66
33.532.....	19	34.625.....	78	35.2005K.....	65	35.5010.....	64	36.1503E.....	65
33.533.....	20	34.626.....	78	35.2006K.....	65	35.5010K.....	65	36.1505E.....	65
33.534.....	19	34.62610S.....	78	35.2010.....	64	35.5020K.....	65	36.1505SIH.....	67
33.535.....	20	34.62713H.....	78	35.2010K.....	65	35.6002K.....	65	36.1505SIHF.....	67

36.1505X.....	66	36.3005.....	66	36.60503.....	75	36.65007CR.....	75	36.9088S.....	70
36.1507X.....	66	36.3005SIHK.....	67	36.60503CR.....	66	36.65010.....	75	36.92117.....	71
36.1510.....	66	36.3005SIHKF.....	67	36.60505.....	75	36.66002.....	75	36.B380.....	69
36.1510E.....	65	36.3005X.....	66	36.60605.....	75	36.66004.....	75	36.K608.....	68
36.1512.....	66	36.3006X.....	66	36.60802.....	75	36.66004X.....	75	36.K613.....	68
36.1512E.....	65	36.3010.....	66	36.60802CR.....	75	36.67502.....	75	36.K616.....	68
36.1512SIH.....	67	36.3010E.....	65	36.60803.....	75	36.68005CR.....	75	36.K671.....	68
36.1515.....	66	36.3010SIH.....	67	36.60804.....	75	36.68005CR-5952.....	75	36.K675.....	68
36.1515SIH.....	67	36.3015.....	66	36.60804CR.....	75	36.7003.....	63	36.K676.....	68
36.1604.....	66	36.3015CR.....	66	36.60805.....	75	36.7004.....	63	36.K677.....	68
36.1605.....	66	36.3015X.....	66	36.60808.....	75	36.7004.5X.....	63	36.K678.....	68
36.1610SIH.....	67	36.3020.....	66	36.60808CR.....	75	36.7005.....	63	36.K679.....	69
36.1612E.....	65	36.3020SIH.....	67	36.61001.....	75	36.7005X.....	63	36.K680.....	69
36.1612X.....	66	36.3020X.....	66	36.61002.....	75	36.7006.....	63	36.K681.....	69
36.1616SIHF.....	67	36.3025E.....	65	36.61003.....	75	36.7006X.....	63	36.K683.....	69
36.1808G.....	66	36.3030.....	66	36.61003CR.....	75	36.7007X.....	63	36.K695.....	69
36.1815EG.....	65	36.3305X.....	66	36.61004.....	75	36.7008.....	63	36.K697.....	69
36.1816.....	66	36.3314.....	64	36.61005.....	75	36.7008.5X.....	63	36.K698.....	69
36.197.....	64	36.3315.....	69	36.61008.....	75	36.7008X.....	63	36.K852.....	69
36.198.....	64	36.3351.....	69	36.61010.....	75	36.7009.....	63	36.K853.....	69
36.198A.....	64	36.3354.....	69	36.61010CR.....	75	36.7009X.....	63	37.250.....	123
36.198CR.....	64	36.34155105.....	64	36.61203.....	75	36.7010.....	63	37.251.....	123
36.198S.....	64	36.3416068.....	64	36.61204.....	75	36.7010.5X.....	63	37.260.....	129
36.199.....	64	36.341840.....	64	36.61205.....	75	36.7010X.....	63	37.261.....	129
36.200.....	64	36.342026.....	64	36.61310.....	75	36.7011.5X.....	63	37.262.....	129
36.2002.....	66	36.342030.....	64	36.61502.....	75	36.7011X.....	63	37.263.....	129
36.2003.....	66	36.342226.....	64	36.61503.....	75	36.7012.....	63	37.400.....	129
36.2003SIH.....	67	36.342232.....	64	36.61505.....	75	36.7012X.....	63	38.1215.....	131
36.2005.....	66	36.342433.....	64	36.61506.....	75	36.7014X.....	63	38.1215N.....	131
36.2005CR.....	75	36.342529.....	64	36.61508.....	75	36.7015.....	63	38.14572.....	130
36.2005SIH.....	67	36.342840.....	64	36.61510.....	75	36.7018X.....	63	38.14574.....	130
36.2005SIHF.....	67	36.344511.....	64	36.61512.....	75	36.7028X.....	63	38.14574/3.....	130
36.2005SIHK.....	67	36.3504.....	69	36.61518.....	75	36.7050.....	63	38.152EPDM.....	68
36.2005X.....	66	36.3515X.....	66	36.61530.....	75	36.7064X.....	63	38.153EPDM.....	68
36.2008X.....	66	36.3516.....	66	36.61603.....	75	36.720802.....	73	38.154EPDM.....	68
36.2010.....	66	36.3520E.....	65	36.61609CR.....	75	36.720803.....	73	38.155EPDM.....	68
36.2010CR.....	66	36.3520X.....	66	36.61710.....	75	36.720903.....	73	38.156EPDM.....	68
36.2010E.....	65	36.3704.....	70	36.61808.....	75	36.720904.....	73	38.158EPDM.....	68
36.2010SIH.....	67	36.3813.....	69	36.62002.....	75	36.721004.....	73	38.160E/K.....	75
36.2010SIHK.....	67	36.3881.....	69	36.62002CR.....	75	36.721004-6.....	73	38.160EPDM.....	68
36.2010X.....	66	36.3881S.....	69	36.62003.....	75	36.721005.....	73	38.162EPDM.....	68
36.2015SIH.....	67	36.3882.....	70	36.62004.....	75	36.721006.....	73	38.165EPDM.....	68
36.2020.....	66	36.3897.....	70	36.62004CR.....	75	36.721202.....	73	38.170E/K.....	75
36.2020CR.....	66	36.4005SIHK.....	67	36.62005.....	75	36.721203.....	73	38.170EPDM.....	68
36.2020SIH.....	67	36.4010.....	66	36.62008.....	75	36.7213564.....	73	38.175E/K.....	75
36.2020SIHF.....	67	36.4010E.....	65	36.62010.....	75	36.721503.....	73	38.175EPDM.....	68
36.208.....	64	36.4010X.....	66	36.62020.....	75	36.721504.....	73	38.180NR.....	68
36.2318X.....	66	36.4012.....	66	36.62305.....	75	36.721508.....	73	38.188.....	75
36.2502CR.....	75	36.4012SIH.....	67	36.62502.....	75	36.721508B.....	73	38.189.....	75
36.2503.....	66	36.4015.....	66	36.62505CR.....	75	36.722004.....	73	38.190.....	75
36.2505.....	66	36.4015E.....	65	36.62506.....	75	36.730805H.....	70	38.191.....	75
36.2505SIH.....	67	36.4020CR.....	66	36.62510.....	75	36.730808.....	70	38.201.5.....	131
36.2505SIHF.....	67	36.4020E.....	65	36.62525.....	75	36.730810.....	70	38.202.....	131
36.2505X.....	66	36.4020X.....	66	36.63005.....	75	36.730906.....	70	38.203.....	131
36.2507X.....	66	36.4025.....	66	36.63005CR-5952.....	75	36.730906H.....	70	38.205.....	131
36.2508X.....	66	36.4025E.....	65	36.63010.....	75	36.730907.....	70	38.27700002.....	75
36.2510.....	66	36.4030E.....	65	36.63012.....	75	36.730907G.....	70	38.27700003.....	75
36.2510E.....	65	36.5005CR.....	66	36.63030CR.....	75	36.730907H.....	70	38.27700004.....	75
36.2510SIH.....	67	36.5005SIH.....	67	36.63204CR.....	75	36.730955.....	71	38.27700005.....	75
36.2512X.....	66	36.5005X.....	66	36.64003.....	75	36.730955B.....	71	38.27700006.....	75
36.2515.....	66	36.5010.....	66	36.64004CR.....	66	36.730955G.....	71	38.27700008.....	75
36.2515SIH.....	67	36.5010E.....	65	36.64004CR.....	75	36.730955H.....	71	38.27700010.....	75
36.2520.....	66	36.5010X.....	66	36.64005.....	75	36.731210.....	71	38.27700015.....	75
36.2520E.....	65	36.5020.....	66	36.64005CR.....	75	36.731210H.....	71	38.27700020.....	75
36.2520SIH.....	67	36.5020E.....	65	36.64010.....	75	36.731412D.....	71	38.27700025.....	75
36.2525.....	66	36.5025.....	66	36.64015.....	75	36.732115.....	71	38.345522.....	128
36.2525E.....	65	36.5030.....	66	36.64020.....	75	36.740907H.....	71	38.401-3.....	115
36.2525SIH.....	67	36.6030E.....	65	36.65003.....	75	36.80955S.....	71	38.400-10.....	115
36.3003.....	66	36.60403.....	75	36.65005CR.....	75	36.90810.....	70	38.400-12.....	115
36.3003X.....	66	36.60404.....	75	36.65005CR-5952.....	75	36.9086S.....	70	38.400-15.....	115

38.400-2.....	115	38.425N-3.....	122	39.171J.....	85	39.4224.....	102	39.680H.....	101
38.400-20.....	115	38.425N-5.....	122	39.172.....	86	39.4229.....	102	39.680H-1180.....	101
38.400-25.....	115	38.426-3.....	122	39.173.....	86	39.4244.....	102	39.680X.....	101
38.400-3.....	115	38.426-3C.....	122	39.174.....	85	39.4249.....	102	39.684X.....	101
38.400-4.....	115	38.426-3CX.....	122	39.175H.....	85	39.4250.....	102	39.684XS.....	101
38.400-5.....	115	38.426-3XL.....	122	39.175J.....	85	39.4251.....	102	39.685.....	101
38.400-6.....	115	38.426-5.....	122	39.177.....	85	39.4257.....	102	39.69.....	102
38.400-6/650.....	115	38.426-5C.....	122	39.178.....	85	39.4269.....	102	39.79.....	102
38.400-8.....	115	38.426-5CX.....	122	39.179.....	85	39.4310.....	102	39.93.....	102
38.401-10.....	115	38.426-8C.....	122	39.180.....	89	39.4311.....	102	39.AV2024.....	98
38.401-15.....	115	38.427-3CXL.....	118	39.181.....	89	39.4333.....	101	39.AV30.....	98
38.401-2.....	115	38.427-3GC.....	118	39.181052.....	86	39.4380.....	102	39.AV5068.....	98
38.401-20.....	115	38.429-2.....	117	39.181060.....	86	39.4380X.....	101	39.AV9580.....	98
38.401-4.....	115	38.430-10/70.....	130	39.181061.....	86	39.4381.....	102	39.B08/08-43.....	93
38.401-5.....	115	38.430-10/90.....	130	39.182.....	89	39.4399.....	101	39.B10/10.....	93
38.401-6.....	115	38.430-5/70.....	130	39.183.....	89	39.4403.....	102	39.B100/30.....	93
38.402-0.5.....	116	38.430-5/80.....	130	39.183A.....	89	39.55.....	102	39.B100/40.....	93
38.402-1.....	116	38.430-8/70.....	130	39.183B.....	89	39.56.....	102	39.B100/50.....	93
38.402-2.....	116	38.430-8/90.....	130	39.183C.....	89	39.57.....	102	39.B100/75.....	93
38.402-3.....	116	38.431.....	122	39.184.....	89	39.620J.....	86	39.B100/75-55.....	93
38.402-4.....	116	38.431-3.....	122	39.185.....	89	39.623J.....	86	39.B15/10.....	93
38.402-5.....	116	38.431-3C.....	122	39.186.....	89	39.624.....	86	39.B15/15.....	93
38.403-2.....	116	38.431-5.....	122	39.187.....	89	39.625.....	86	39.B15/15-M4x8.....	93
38.403-3.....	116	38.431-5C.....	122	39.188.....	89	39.626J.....	86	39.B15/15-M5x10.....	93
38.403-4.....	116	38.432.....	118	39.20/15-M5.....	95	39.627.....	86	39.B15/15-R11.....	93
38.403-5.....	116	38.433.....	118	39.20/8-M8.....	95	39.628.....	86	39.B16/18.....	93
38.403-6.....	116	38.434.....	120	39.2486.....	101	39.629.....	87	39.B20/10.....	93
38.403-8.....	116	38.434A.....	120	39.2776.....	102	39.630.....	87	39.B20/10-M6.....	93
38.404-10.....	116	38.435C.....	120	39.30/17.....	97	39.631A.....	87	39.B20/15.....	93
38.404-12.....	116	38.436C.....	121	39.3010.....	101	39.631X.....	87	39.B20/15-A4.....	93
38.404-15.....	116	38.440-6.....	129	39.3023.....	102	39.632A.....	85	39.B20/15-M6.....	93
38.404-2.....	116	38.440-6A.....	129	39.3029.....	102	39.632B.....	85	39.B20/15-M6-43.....	93
38.404-20.....	116	38.440-6B.....	129	39.3051.....	102	39.632C.....	85	39.B20/20-M6-43.....	93
38.404-3.....	116	38.440-8.....	129	39.3240.....	101	39.632J.....	85	39.B20/20-M6x15-43.....	93
38.404-4.....	116	38.440-8A.....	129	39.3366.....	102	39.634.....	87	39.B20/20-M6.....	93
38.404-5.....	116	38.440-8X.....	129	39.3381.....	102	39.634P.....	87	39.B20/25-M6.....	93
38.404-6.....	116	38.449-1200.....	130	39.3428.....	102	39.635.....	88	39.B2020.....	93
38.404-8.....	116	38.449-1600.....	130	39.3581.....	102	39.635X.....	88	39.B25/25.....	93
38.405-10.....	117	38.449-750.....	130	39.360.....	86	39.636.....	88	39.B25/25-M6.....	93
38.405-10X.....	117	38.450-760.....	130	39.36412.....	102	39.636X.....	88	39.B25/30.....	93
38.405-15.....	117	38.451-1600.....	130	39.3700.....	102	39.637.....	86	39.B2513.....	93
38.405-20.....	117	38.452-1200.....	130	39.3722.....	101	39.638.....	86	39.B30/20.....	93
38.405-40.....	117	38.5017530.....	126	39.3726.....	102	39.642.....	87	39.B30/20-M6x10-43.....	93
38.405-6.....	117	38.5017530A.....	126	39.3802.....	102	39.642X.....	87	39.B30/20-M6x10-57.....	93
38.405-8.....	117	38.5501110.....	128	39.3803.....	102	39.643X.....	87	39.B30/20XXX.....	93
38.406-2T.....	117	38.5501210.....	128	39.3803X.....	101	39.644.....	87	39.B30/20NBR.....	93
38.406-3H.....	117	38.5501310.....	128	39.3813.....	102	39.644A.....	87	39.B30/20X.....	93
38.406-3T.....	117	38.623750.....	128	39.3815.....	102	39.645.....	90	39.B30/20XX.....	93
38.406-5T.....	117	38.623752.....	128	39.3846.....	101	39.646.....	86	39.B30/25-43.....	93
38.407-3.....	119	38.623764.....	128	39.3849.....	102	39.647.....	87	39.B30/30-M6.....	93
38.407-3C.....	119	38.8100110.....	125	39.3868.....	101	39.648.....	87	39.B30/30-M6-M8x23.....	93
38.407-3G.....	119	38.8100310.....	125	39.3872.....	101	39.649.....	87	39.B3030.....	93
38.407-3X.....	119	38.8103110.....	125	39.3873.....	101	39.650.....	87	39.B30/40.....	93
38.407-3XL.....	119	38.9110030.....	127	39.3874.....	101	39.651.....	87	39.B40/20.....	93
38.410200.....	126	38.9117630.....	127	39.3875.....	101	39.651A.....	87	39.B40/30-M8x10-43.....	93
38.410201.....	126	38.9117631.....	127	39.3876.....	101	39.652.....	87	39.B40/30.....	93
38.418.....	119	38.9716230.....	127	39.3878.....	102	39.653.....	87	39.B40/35.....	93
38.418N.....	119	38.9726230.....	125	39.3879.....	102	39.656.....	88	39.B50/20-M8.....	93
38.419A.....	121	38.9730030.....	125	39.3887.....	101	39.657.....	88	39.B50/25.....	93
38.419C.....	120	38.9730030S.....	125	39.3904X.....	101	39.658.....	88	39.B50/30.....	93
38.420CX.....	121	38.9750030.....	125	39.3923.....	102	39.659.....	88	39.B50/40.....	93
38.420X.....	121	38.9971010.....	130	39.3925.....	102	39.660.....	88	39.B50/40-43.....	93
38.420XL.....	121	38.9971020.....	130	39.3952.....	102	39.661.....	88	39.B50/50.....	93
38.422-1750.....	129	39.103195.....	99	39.4012.....	102	39.662.....	88	39.B50/50-M10.....	93
38.423-1750.....	129	39.1208P.....	30	39.4054.....	102	39.663.....	88	39.B60/30.....	93
38.424-1800.....	129	39.167G.....	85	39.4087.....	101	39.664.....	88	39.B60/40.....	93
38.425-3.....	122	39.168G.....	85	39.4110.....	102	39.665.....	88	39.B60/45-A2.....	93
38.425-3C.....	122	39.169G.....	85	39.4129.....	102	39.674.....	101	39.B75/30.....	93
38.425-5.....	122	39.170G.....	85	39.4156.....	101	39.678.....	101	39.B75/40.....	93
38.425-5C.....	122	39.171G.....	85	39.4178.....	101	39.678X.....	101	39.B75/40-M10x18.....	93

39.B75/40-M12x40.....	93	39.D10/10-A2.....	95	39.D50/30-M10.....	96	39.E60/30.....	97	39.M20/15-A4.....	92
39.B75/40-M8x18X.....	93	39.D100/30.....	96	39.D50/30-M10-A2.....	96	39.E60/30-M12.....	97	39.M20/20-A2.....	92
39.B75/50.....	93	39.D100/50.....	96	39.D50/30-M10x38.....	96	39.E60/40.....	97	39.M20/8-M6.....	92
39.BUMPER.....	137	39.D100/75.....	96	39.D50/40.....	96	39.E60/40-M12.....	97	39.M2015.....	92
39.BUMPER-CAR.....	105	39.D13/13-M8x35.....	95	39.D50/40-43.....	96	39.E70/35.....	97	39.M2020.....	92
39.BUMPERB.....	137	39.D15/10.....	95	39.D50/40NBR.....	96	39.E70/50.....	97	39.M2020-M6-45.....	92
39.BUMPERC.....	137	39.D15/10-M6.....	95	39.D50/50.....	96	39.E75/30.....	97	39.M2020-M8.....	92
39.BUMPERD.....	137	39.D15/15.....	95	39.D50/60.....	96	39.E75/30-M12.....	97	39.M24.....	90
39.BUMPERE.....	137	39.D15/15-M6.....	95	39.D50/80.....	96	39.E75/45-M12.....	97	39.M25/10-M6ESD.....	92
39.C100/40.....	94	39.D15/4G-M4x6.....	95	39.D60/30.....	96	39.E75/50.....	97	39.M25/10-M8.....	92
39.C100/50.....	94	39.D150/50.....	96	39.D60/30-M12.....	96	39.E75/50-M12.....	97	39.M25/10-M8x10/20.....	92
39.C100/55NBR68.....	94	39.D20/10.....	95	39.D60/40.....	96	39.E80/50.....	97	39.M2515.....	92
39.C100/60-M12.....	94	39.D20/10-A4.....	95	39.D60/40M12.....	96	39.E80/50-M16.....	97	39.M25/22.....	92
39.C100/75.....	94	39.D20/15E.....	95	39.D60/50.....	96	39.GMF100/42.....	98	39.M2515-55.....	92
39.C150/40.....	94	39.D20/20.....	95	39.D65/35.....	96	39.GMF108/46.....	98	39.M2520.....	92
39.C150/75-M20.....	94	39.D20/20-M6.....	95	39.D70/40.....	96	39.GMF122/50.....	98	39.M2520-M6.....	92
39.C20/10.....	94	39.D20/20-M6x43.....	95	39.D70/40-M12.....	96	39.GMF150/54.....	98	39.M30/10.....	92
39.C20/15.....	94	39.D25/15.....	95	39.D70/45-M10x12.....	96	39.GMF67/34.....	98	39.M30/20XX.....	92
39.C20/20.....	94	39.D25/15-A2.....	95	39.D75/40-68.....	96	39.GMF67/34-SH.40.....	98	39.M3015.....	92
39.C20/20-A4.....	94	39.D25/18.....	95	39.D75/50-M10.....	96	39.GMF75/34.....	98	39.M3015-M8x15.....	92
39.C20/25-VMQ.....	94	39.D30/10.....	95	39.D75/50-M10/sh68.....	96	39.KD25/17.....	98	39.M3020.....	92
39.C200/100.....	94	39.D30/10-A2.....	95	39.D75/50-M12.....	96	39.KD50/18.....	98	39.M3020-55.....	92
39.C25/10.....	94	39.D30/10-M6.....	95	39.D8/5.....	95	39.KP-D10/10.....	98	39.M3030.....	92
39.C25/15.....	94	39.D30/10-M6x15.....	95	39.DC300300.....	104	39.KP-D115/136.....	98	39.M3030-SS.....	92
39.C25/15-A2.....	94	39.D30/10-M6x28.....	95	39.DD150150.....	103	39.KP-D118/77.....	98	39.M40/20.....	92
39.C25/25.....	94	39.D30/12-M6G.....	95	39.DD300300.....	103	39.KP-D15/22.....	98	39.M40/38-M12.....	92
39.C25/25-M8.....	94	39.D30/15.....	95	39.DD350350.....	103	39.KP-D20/15.....	98	39.M40/40.....	92
39.C30/15.....	94	39.D30/15-M10x25.....	95	39.E100/25.....	97	39.KP-D25/16.....	98	39.M40/40-A2.....	92
39.C30/20.....	94	39.D30/15-M10x50.....	95	39.E100/30.....	97	39.KP-D25/20.....	98	39.M40/50-A2.....	92
39.C30/22.....	94	39.D30/15-M6.....	95	39.E100/40.....	97	39.KP-D30/30.....	98	39.M4025.....	92
39.C30/30.....	94	39.D30/15-M6G.....	95	39.E100/40NBR.....	97	39.KP-D30/36.....	98	39.M4030.....	92
39.C30/30-A4.....	94	39.D30/15-M8x23.....	95	39.E100/40NBR43.....	97	39.KP-D30/36-A2.....	98	39.M4038.....	92
39.C30/40.....	94	39.D30/18-M10.....	95	39.E100/40NBR68.....	97	39.KP-D30/36-A4.....	98	39.M50/20-M10X.....	92
39.C40/20.....	94	39.D30/20.....	95	39.E100/50.....	97	39.KP-D50/50.....	98	39.M50/20NBR.....	92
39.C40/25.....	94	39.D30/20-M6.....	95	39.E100/55NBR68.....	97	39.KP-D50/58.....	98	39.M50/30-A2.....	92
39.C40/30.....	94	39.D30/20-M6-43.....	95	39.E100/75.....	97	39.KP-D50/61.....	98	39.M50/30NBR.....	92
39.C40/40.....	94	39.D30/20-M8x15.....	95	39.E150/50.....	97	39.KP-D50/67.....	98	39.M5025.....	92
39.C40/40-M10.....	94	39.D30/30.....	95	39.E150/50-M20.....	97	39.KP-D60/40.....	98	39.M5030.....	92
39.C40/50.....	94	39.D30/30-M6.....	95	39.E150/75-M20.....	97	39.KP-D70/58.....	98	39.M5040.....	92
39.C40/50-68.....	94	39.D30/8-M6G.....	95	39.E20/10.....	97	39.KP-D70/60.....	98	39.M5045.....	92
39.C50/20.....	94	39.D30/8-M6GX.....	95	39.E20/10-M6.....	97	39.KP-D75/89.....	98	39.M5050.....	92
39.C50/25.....	94	39.D30/8-M6x18.....	95	39.E20/25-68.....	97	39.KP-D75/89-10.....	98	39.M60/50.....	93
39.C50/30.....	94	39.D30/8-M6x23.....	95	39.E25/10.....	97	39.KP-E10/10.....	98	39.M6035.....	92
39.C50/30-68.....	94	39.D40/15.....	95	39.E25/10-M6.....	97	39.KP-E115/136.....	98	39.M6050.....	92
39.C50/30-A2.....	94	39.D40/15-M6.....	95	39.E25/25.....	97	39.KP-E118/77.....	98	39.M7540.....	92
39.C50/30-M8.....	94	39.D40/20.....	95	39.E25/25-68.....	97	39.KP-E15/22.....	98	39.M7550.....	92
39.C50/35.....	94	39.D40/20-A2.....	95	39.E30/10-M6-43.....	97	39.KP-E20/15.....	98	39.M7560.....	92
39.C50/35-43.....	94	39.D40/20-M10.....	95	39.E30/10-M6G.....	97	39.KP-E20/24.....	98	39.M8050.....	92
39.C50/40.....	94	39.D40/20-M6.....	95	39.E30/15.....	97	39.KP-E25/16.....	98	39.M9/12-43.....	92
39.C50/40-M12.....	94	39.D40/20-M6-43.....	95	39.E30/15-M6.....	97	39.KP-E25/20.....	98	39.SC300300.....	104
39.C50/45.....	94	39.D40/25-A2.....	95	39.E30/15-M6G.....	97	39.KP-E30/30.....	98	39.SD300250.....	103
39.C50/50.....	94	39.D40/25-A2-S.....	95	39.E30/20.....	97	39.KP-E30/36.....	98	39.SD300300.....	103
39.C60/30.....	94	39.D40/30.....	96	39.E30/20-M6.....	97	39.KP-E35/40.....	98	41.13459.....	36
39.C60/30-M8.....	94	39.D40/30-A2.....	96	39.E30/25.....	97	39.KP-E50/50.....	98	41.13459X.....	36
39.C60/40.....	94	39.D40/30-M8.....	96	39.E30/30.....	97	39.KP-E50/61.....	98	41.333S.....	30
39.C60/40-M10.....	94	39.D40/30-M8x23.....	96	39.E30/30-M6.....	97	39.KP-E50/67.....	98	41.406.....	37
39.C60/40-M12.....	94	39.D40/35.....	96	39.E30/35.....	97	39.KP-E50/68.....	98	41.670.....	36
39.C60/45.....	94	39.D40/35-A2.....	96	39.E40/15-SH.43.....	97	39.KP-E60/40.....	98	41.674A.....	30
39.C65/35.....	94	39.D40/35-M8-A2.....	96	39.E40/20.....	97	39.KP-E70/58.....	98	41.675A.....	30
39.C65/35-M10.....	94	39.D40/38.....	96	39.E40/20-M6.....	97	39.KP-E70/60.....	98	41.678.....	31
39.C70/45-M10.....	94	39.D40/40-A2.....	96	39.E40/20NBR.....	97	39.KP-E75/89.....	98	45.102G.....	82
39.C70/50-A2.....	94	39.D40/40-M8x23-68.....	96	39.E40/30.....	97	39.KP-E75/89-M10.....	98	45.123.....	82
39.C75/30.....	94	39.D40/40.....	96	39.E40/30-M6.....	97	39.KP-E95/80.....	98	45.2031024.....	82
39.C75/30-M10.....	94	39.D40/45-A2.....	96	39.E50/20.....	97	39.M10/10.....	92	45.20511046.....	82
39.C75/30-M10-68.....	94	39.D50/20.....	96	39.E50/20-M10.....	97	39.M100/50NBR.....	92	45.20511091.....	82
39.C75/50.....	94	39.D50/20-M10x15.....	96	39.E50/20-M12.....	97	39.M100/55-40.....	92	45.2051445.....	83
39.C75/55.....	94	39.D50/20-M12.....	96	39.E50/25.....	97	39.M15/15.....	92	45.205SX.....	37
39.C75/55-43A.....	94	39.D50/25.....	96	39.E50/25-M12.....	97	39.M1810.....	92	45.206AL.....	81
39.C75/55-M10.....	94	39.D50/25-M12.....	96	39.E50/40.....	97	39.M20/10.....	92	45.208.....	37
39.D10/10.....	95	39.D50/30.....	96	39.E50/40-M12.....	97	39.M20/10-M6.....	92	45.209BX.....	37

45.210BX.....	37	48.636KF.....	111	50.271.....	134	79.054A.....	135	Group0131.....	40
45.210C.....	37	50.083000GG.....	46	50.275.....	134	79.055.....	135	Group0132.....	40
45.210CX.....	37	50.083000SS.....	46	50.276.....	134	79.056.....	135	Group0133.....	40
45.216C-50.....	82	50.083013.....	44	50.280.....	135	83.842.....	144	Group0134.....	40
45.217C.....	81	50.083015GG.....	44	52.269X.....	55	84.930.....	144	Group0135.....	42
45.221C.....	81	50.083015GGX.....	44	52.CWC8.....	90	84.931.....	144	Group0136.....	42
45.224.....	81	50.083030.....	44	52.PP106.....	36	84.932T.....	144	Group0137.....	40
45.235N1057.....	83	50.083032GG.....	44	52.PPCC720.....	137	84.934.....	144	Group0138.....	41
45.235N429.....	83	50.083033.....	44	52.PPTLRED.....	137	84.934A.....	144	Group0139.....	39
45.235NG1057.....	83	50.083040.....	44	54.261100.....	139	84.935.....	144	Group0140.....	40
45.235NG429.....	83	50.083040G.....	44	54.261120.....	139	87.1034.....	145	Group0141.....	40
45.308C.....	82	50.083040GG.....	44	54.261130.....	139	87.1035.....	145	Group0142.....	41
45.308C-50.....	82	50.083040GS.....	44	54.261700J-5.....	139	87.2010.....	145	Group0143.....	41
45.309C.....	82	50.083045G.....	44	54.261720J-5.....	139	87.51939S.....	145	Group0144.....	40
45.309C-50.....	82	50.083045X.....	44	54.261740J-5.....	139	87.51989.....	145	Group0145.....	40
45.347C.....	81	50.083046.....	44	54.261760J-5.....	139	87.51999F.....	145	Group0146.....	40
45.383C.....	81	50.083050.....	44	54.261780J-5.....	139	87.52759.....	145	Group0147.....	40
45.388C.....	81	50.083050GG.....	44	54.710720.....	44	87.52759X.....	145	Group0148.....	40
45.393.....	82	50.083052G.....	44	54.710770.....	45	87.705I.....	145	Group0150.....	39
45.394.....	82	50.083055G.....	45	54.710780.....	46	87.723.....	145	Group0151.....	41
45.705C.....	81	50.083059.....	45	56.7001-007.....	85	87.770/10.....	145	Group0152.....	41
45.832.....	81	50.083060.....	45	57.400/3E.....	107	87.81152.....	145	Group0153.....	39
45.836.....	81	50.083060G.....	45	57.401/3E.....	107	87.812015.....	145	Group0154.....	41
45.837.....	81	50.083061.....	45	57.402/3E.....	107	87.81252.....	145	Group0155.....	40
45.839.....	81	50.083065.....	45	57.403/2.5J.....	108	87.81302.....	145	Group0156.....	41
45.872.....	81	50.083065G.....	45	57.403/3E.....	107	87.814015.....	145	Group0157.....	41
45.874.....	81	50.083070B.....	45	57.404/3E.....	107	DC-fender.....	104	Group0158.....	40
45.882.....	81	50.083070G.....	45	57.405/2J.....	108	DD-fender.....	103	Group0159.....	39
45.884C.....	81	50.083070GG.....	45	57.405/3E.....	107	Group0010.....	39	Group0160.....	39
45.886.....	82	50.083080G.....	45	57.406/3E.....	107	Group0011.....	39	Group0161.....	42
45.886G.....	82	50.083081.....	45	57.407/3E.....	107	Group0012.....	39	Group0163.....	41
45.894.....	82	50.083088.....	45	57.408/3E.....	107	Group0020.....	39	Group0164.....	41
45.901.....	82	50.083089.....	45	57.410/3E.....	107	Group0021.....	39	Group0165.....	41
45.980A.....	82	50.083090.....	46	57.411/3E.....	107	Group0022.....	39	Group0166.....	41
45.980K.....	82	50.083095B.....	46	57.412/3E.....	107	Group0023.....	39	Group0167.....	40
45.980S.....	82	50.083095BB.....	45	57.413/3E.....	107	Group0024.....	39	Group0168.....	41
48.442.....	113	50.083095G.....	46	57.423/3E.....	107	Group0025.....	39	Group0169.....	39
48.451.....	112	50.13621.....	135	57.424/3E.....	107	Group0030.....	39	Group0170.....	40
48.452.....	112	50.241NR.....	133	57.425/3E.....	107	Group0100.....	39	Group0171.....	40
48.542.....	113	50.242NR.....	133	57.426/3E.....	107	Group0101.....	39	Group0172.....	40
48.544A.....	113	50.243NR.....	134	57.427/3E.....	107	Group0102.....	40	Group0173.....	41
48.603.....	111	50.244NR.....	134	57.428/3E.....	107	Group0102A.....	40	Group0174.....	42
48.605.....	112	50.245H.....	133	57.429/3E.....	107	Group0103.....	40	Group0175.....	39
48.605B.....	112	50.245NR.....	133	57.430/3E.....	107	Group0103A.....	40	Group0176.....	41
48.605X.....	112	50.246-10.....	133	57.431/3E.....	107	Group0104.....	40	Group0177.....	41
48.605Y.....	112	50.246NR.....	133	57.440/3E.....	107	Group0105.....	40	Group0178.....	39
48.608.....	112	50.247NR.....	133	57.441/3E.....	107	Group0106.....	39	Group0179.....	40
48.609.....	112	50.250.....	133	57.442/3E.....	107	Group0107.....	39	Group0180.....	41
48.612.....	113	50.252G.....	133	57.443/2JP.....	108	Group0108.....	39	Group0181.....	40
48.613K.....	111	50.252J.....	133	57.443/3E.....	107	Group0109.....	39	Group0182.....	41
48.618.....	113	50.254J.....	133	57.444/3E.....	107	Group0110.....	39	Group0183.....	41
48.621.....	112	50.255J.....	133	57.445/3E.....	107	Group0111.....	39	Group0184.....	42
48.622.....	112	50.260-10.....	27	57.446/3E.....	107	Group0112.....	39	Group0185.....	42
48.622X.....	112	50.260-10T.....	27	57.447/3E.....	107	Group0113.....	39	Group0186.....	39
48.623.....	112	50.260-4.....	27	57.448/3E.....	107	Group0115.....	41	Group0187.....	41
48.623X.....	112	50.260-5.....	27	57.449/3E.....	107	Group0116.....	41	Group0188.....	40
48.624.....	112	50.260-6.....	27	57.450/3E.....	107	Group0117.....	41	Group0189.....	41
48.626.....	111	50.260-8.....	27	57.451/3E.....	107	Group0118.....	42	Group0190.....	41
48.634.....	111	50.261.....	134	57.452/3E.....	107	Group0119.....	39	Group0191.....	40
48.634F.....	111	50.263.....	134	57.453/3E.....	107	Group0120.....	39	Group0192.....	39
48.634K.....	111	50.263K.....	134	57.454/3E.....	107	Group0121.....	39	Group0193.....	41
48.634KF.....	111	50.263K-10.....	134	57.455/3E.....	107	Group0122.....	41	Group0194.....	40
48.635.....	111	50.263KL.....	134	57.456/3E.....	107	Group0123.....	41	Group0195.....	42
48.635F.....	111	50.264NR.....	134	63.550300.....	113	Group0124.....	39	Group0196.....	41
48.635K.....	111	50.265.....	133	68.4250.....	113	Group0125.....	39	Group0197.....	41
48.635KF.....	111	50.266.....	133	79.051.....	135	Group0126.....	39	Group0198.....	41
48.636.....	111	50.267.....	134	79.051A.....	135	Group0127.....	40	Group0199.....	40
48.636F.....	111	50.267-10.....	134	79.052.....	135	Group0128.....	40	Group0200.....	41
48.636FX.....	111	50.267NR.....	134	79.053.....	135	Group0129.....	40	Group0201.....	39
48.636K.....	111	50.269.....	134	79.054.....	135	Group0130.....	40	Group0202.....	41

Group 0203.....	42
Group 0204.....	42
Group 0205.....	41
Group 0206.....	40
Group 0207.....	40
Group 0208.....	39
Group 0209.....	39
Group 0210.....	41
Group 0211.....	40
Group 0212.....	42
Group 0213.....	41
Group 0214.....	39
Group 0215.....	41
Group 0501.....	42
Group 0502.....	42
Group 0503.....	42
Group 0504.....	42
Group 0505.....	42
Group 0506.....	42
Group 0507.....	42
Group 0508.....	40
Group 0509.....	42
Group 0510.....	41
Group 0511.....	42
Group 0512.....	41
Group 0513.....	42
Group 0514.....	42
Group 0515.....	42
Group 0516.....	40
Group 0517.....	40
Keyhole-fender.....	105
KF-A-fender.....	105
KF-B-fender.....	105
KF-C-fender.....	105
KF-D-fender.....	105
MC-fender.....	105
S10.3301.....	144
S10.3303.....	144
S10.3311.....	144
S10.3312.....	144
S10.3313.....	144
S10.3314.....	144
SC-fender.....	104
SD-fender.....	103
Wing-type-fender.....	105

